

KUVIO 200 (KUV200)

GENERAL DATA



HIGH EFFICIENCY IN-LINE MIXED FLOW FAN CONSTRUCTED IN SELF-EXTINGUISHING PLASTIC RESIN AND RESISTANT TO AGGRESSIVE CHEMICAL AGENTS.

MANUFACTURING FEATURES:

High efficiency In-line mixed flow fan with motor-holder enclosures, end cones and mixed flow impellers constructed in self-extinguishing plastic resin with a mineral-based additive to ensure dimensional stability. The side cones incorporate the fan's anchoring brackets onto the target surface for safe, quick installation. Designed to allow the assembly or disassembly of the fans without manipulating the ducts.

Standard version and timer version (T). Two-speed (sizes 100-160) and 3 speed (200-315) monophasic motor with thermal overload cut-out and shafts turning on ball bearings to guarantee long life continuous work (at least 30.000 hours at the maximum plate temperature. Standard voltages 220-240V 50Hz and 60 Hz. Speed adjustable with accessories.

Maximum working temperature in continuous: 50°C

IP44 protection. IMQ Safety certificate to guaranty the electromechanical compatibility.


APPLICATIONS:

Designed for duct supply and exhaust ventilation systems that require excellent response in terms of high pressure and air flow, while keeping noise under control.

It can be used in many small and medium ventilation installations for air renewal such as:

- Bathrooms and changing rooms.
- Commercial offices.
- Extraction in domestic kitchens after the extraction hood.
- Schools
- Waiting room.
- Commercial premises, laundries, shops, bars, restaurants ...
- Laboratories.

PERFORMANCE CURVE

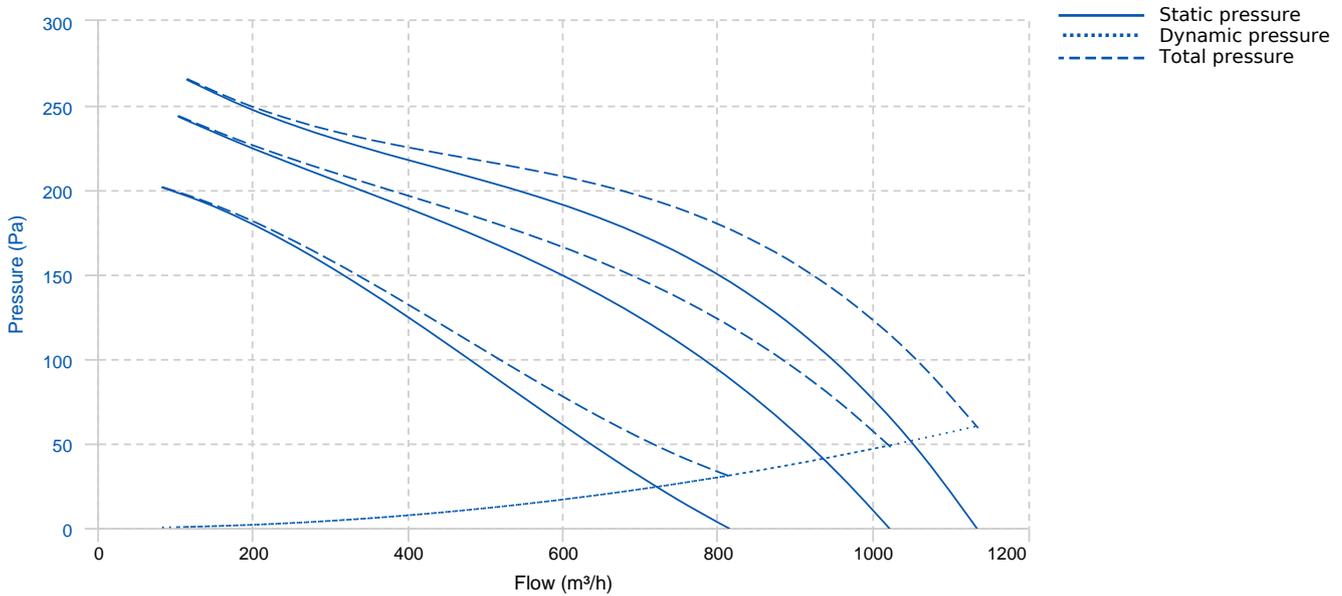

TECHNICAL DATA


Fan

Approx. weight	4.9 kg	Max. Flow	1135 m³/h
----------------	--------	-----------	-----------

Motor

Power	0,11/0,095/0,08 kW	RPM	2710/2450/1925	I max. (230V)	0,49/0,42/0,34 A
-------	--------------------	-----	----------------	---------------	------------------

DIMENSIONS

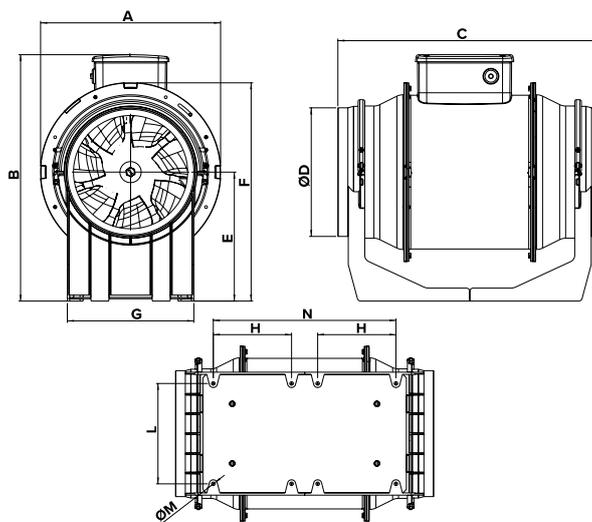


Dimensions (mm)

A	270	B	373	C	396	D	194.5	E	195
---	-----	---	-----	---	-----	---	-------	---	-----

Dimensions (mm)

F	330	G	190	H	120	L	155	M	5.5
N	280								

WIRING DIAGRAM

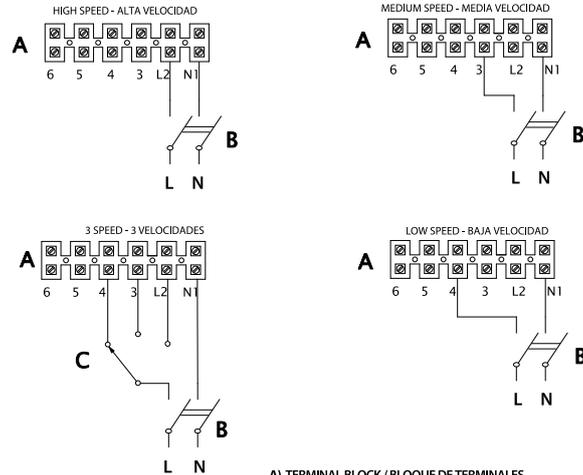

A) TERMINAL BLOCK / BLOQUE DE TERMINALES
 B) MAIN BIPOLAR SWITCH / INTERRUPTOR PRINCIPAL BIPOLAR
 C) 3 WAYS SWITCH / INTERRUPTOR DE 3 VIAS

ACCESSORIES




MANUAL SINGLE PHASE SPEED CONTROLLER
REG 1,5A
REF: 960710015



SPEED SELECTOR SWITCH
INT 3V 3A
REF: 960000603



ANTI-VIBRATION JOINT
JE 45
REF: 300719201



CIRCULAR OUTDOOR FLANGE WITH BIRD GUARD
VISC Ø200
REF: FX0050064



CIRCULAR SOUND ATTENUATOR IN GALVANISED STEEL
SILC-MINI 200
REF: SILCM200



BACKDRAUGHT SHUTTER
BDC Ø 200
REF: BDC200