



ITALIAN
COMPANY
SINCE 1956

INTEGRATED SYSTEMS AND AIR CONDITIONING

Catalogue 2024






Your Home Comfort since 1956

Olimpia Splendid is an Italian company that - for almost 70 years - has been designing, producing and marketing technologies for conditioning, heating and treating the air in the home.

Ensuring the best home comfort, at all times of the year and for all our customers around the world, is our goal. Taking care of the climate in the home, while respecting that of the Planet is how we have chosen to achieve this. For this reason, we create innovative products with a high aesthetic finish, efficient and with reduced environmental impact: solutions for more sustainable comfort.

Our Home is the Planet

Olimpia Splendid's commitment to sustainability is built around 5 key points, which are inspired by the objectives defined by the UN in the 2030 Agenda for Sustainable Development: a program of actions for people, the planet and prosperity. From 2021, Olimpia Splendid's results are monitored and published through the annual Sustainability Report.



Innovative and inclusive solutions

Our strategy for sustainable economic growth is based on innovation and diversification. There are 12 technological patents currently active, created to overcome the limits of traditional solutions and to make climate comfort a right within everyone's reach.



Carbon neutral processes

To efficiently use industrial resources, we have set ourselves the goal of reducing our direct and indirect greenhouse gas emissions by 50% by 2030 and of achieving complete climate neutrality by 2040.



Efficient technologies

Researching and developing new heat pump comfort systems is our direct contribution to creating sustainable cities and communities, where domestic consumption is decarbonised and the available electricity is used wisely.



Products that are durable and can be regenerated

For an eco-compatible waste management, we select components and materials based on their recyclability and repairability, we guarantee spare parts for a minimum of 15 years and we encourage the recovery and disposal of end-of-life products through the most virtuous consortia.



Shared responsibility

The fight against climate change must be objective and a shared responsibility. This is why we are personally committed to effectively informing our consumers and to promoting sustainable behaviour in the use of our products.

Made in Italy around the world

Every Olimpia Splendid product is born in the Brescia headquarters, where the R&D centre designs and develops solutions capable of standing out for their innovation, aesthetic finish and sustainability, following the LCA (Life Cycle Assessment) principles. The core technologies are created in our Italian production pavilion, 100% powered by renewable electricity and designed as a highly productive Smart Factory. From Italy, the Olimpia Splendid brand comfort then reaches over 45 countries around the world, through 5 direct commercial branches and a widespread network of distributors.

FRANCE

Parigi
Commercial subsidiary

USA

New York
Commercial subsidiary

CHINA

Shanghai
Trading subsidiary

ITALY

Cellatica-BS
Headquarters and production site

Gualtieri-RE
Logistic hub

SPAIN

Madrid
Commercial subsidiary

AUSTRALIA

Melbourne
Commercial subsidiary



ONLINE SERVICE

Download Area


All of the documentation necessary for installation and operation of our machines can be found in the download section of our website www.olimpiasplendid.com

Private Documentation

Do you need performance data and specifications related to heat pumps and plant terminals? Access the reserved area for all necessary information.

Products Documentation

Should you need additional information regarding our products, consult the "Products Documentation" section. Here, you will find energy labels, templates and installation manuals and product catalogues.

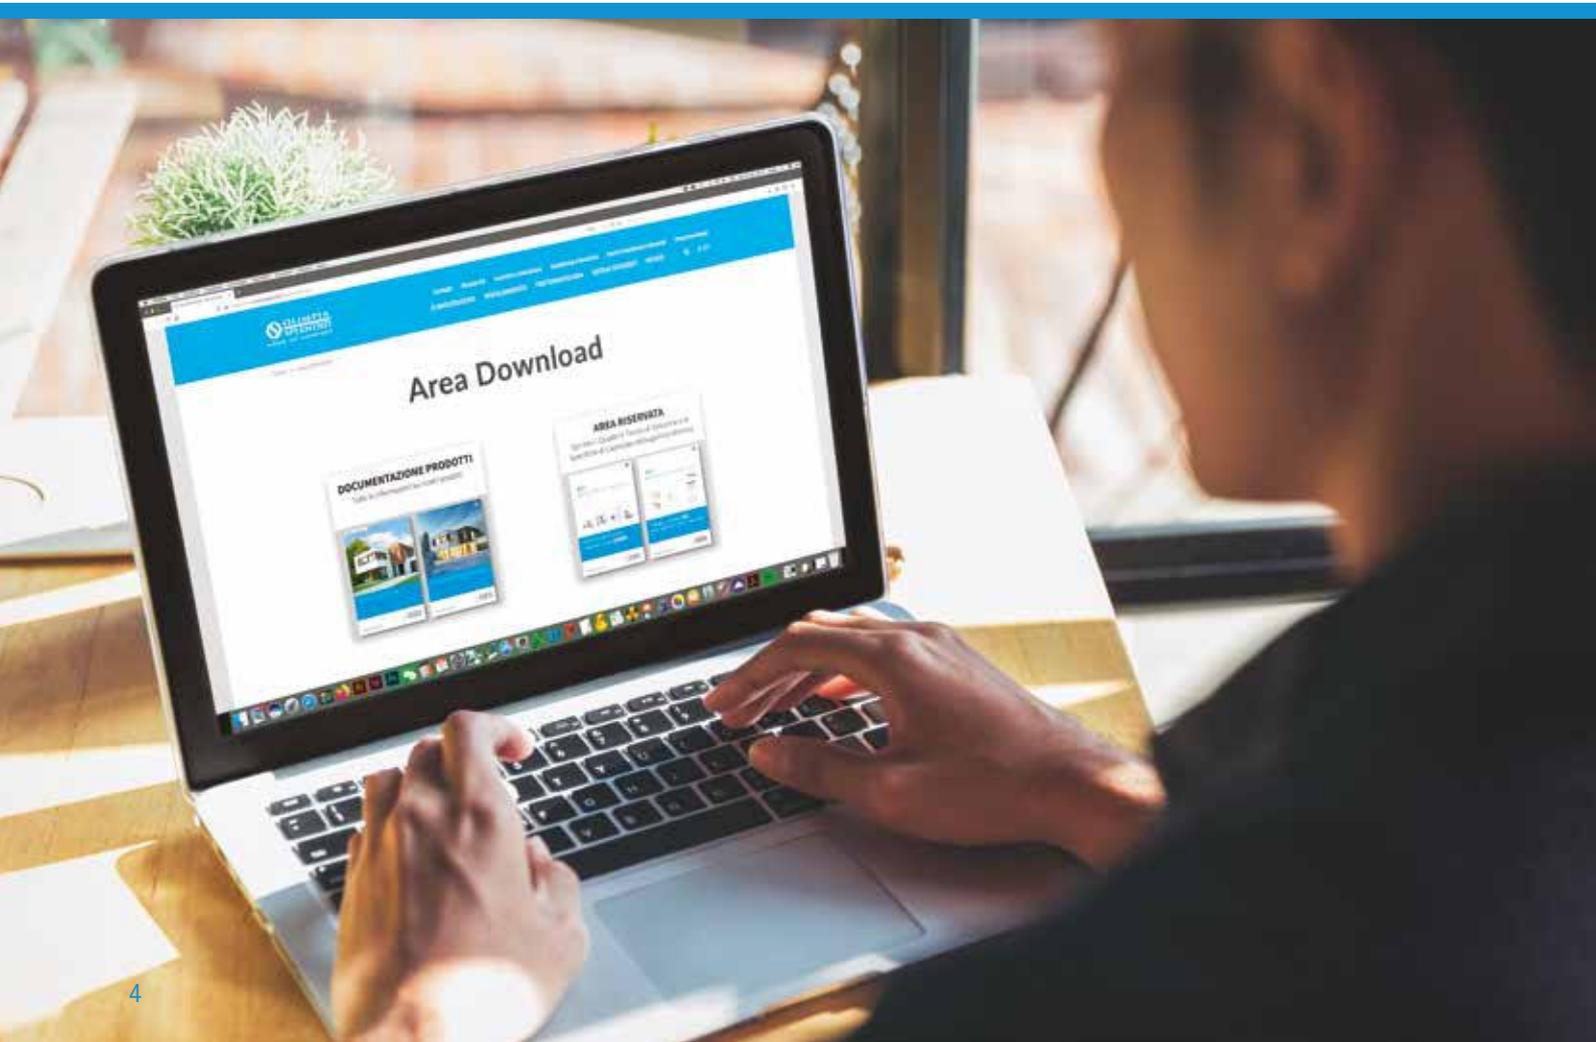

13 SiOS CONTROL

Building Management System

14 SiOS CONTROL

19 SHERPA

Air-water heat pumps, split and single-piece, and heat pump water heaters

26 SHERPA AQUADUE

32 SHERPA

40 KIT SHERPA FLEX BOX

42 SHERPA COLD

46 SHERPA MONOBLOC

50 SHERPA SHW

52 ACCESSORIES

58 SYSTEM DIAGRAMS

63 Bi2

Hydronic system terminal units for annual cycle comfort

70 Bi2 AIR

74 Bi2 WALL

78 Bi2 SMART

80 Bi2 NAKED

88 Ci2 WALL

90 ACCESSORIES

97 SITALI

Decentralised and ducted heat recovery ventilation units

102 SITALI SF 150 S1

103 SITALI SFE 100

104 SITALI CX 120

106 SITALI CX 180

108 SITALI CX 280

110 SITALI CX 400

112 SITALI CX 550

114 ACCESSORIES

123 UNICO

Air conditioners and air-to-air heat pumps without outdoor unit

132 UNICO EVO

134 UNICO AIR

136 UNICO EDGE

142 UNICO PRO

144 UNICO TOWER

146 UNICO TWIN

148 UNICO EASY

150 UNICO R

152 ACCESSORIES

157 NEXYA

Monosplit and multisplit air conditioners

162 NEXYA ENERGY E

164 NEXYA S4 E

166 NEXYA COMMERCIAL DUCT

168 NEXYA COMMERCIAL CASSETTE

170 NEXYA COMMERCIAL CEILING

172 NEXYA MULTISPLIT

179 DOLCECLIMA

Portable air conditioners

182 DOLCECLIMA ARIA 8

184 DOLCECLIMA SILENT S1 10

186 DOLCECLIMA SILENT 12 A+ WIFI

188 DOLCECLIMA AIR PRO 14 HP WIFI



**INTEGRATED
SYSTEMS**



Olimpia Splendid integrated systems

The next generation plant for low-consumption buildings and energy requalification

A yearlong cycle of climate control

The Integrated Systems Olimpia Splendid deliver heating, cooling, dehumidification, air treatment and the production of domestic hot water. Everything necessary for home comfort, 365 days a year, all included in a single plant: simple, efficient, integrated.

The plant solution of Olimpia Splendid simplifies the design and installation operations, as well as the use and maintenance interventions of all the products for home comfort. The generators have high energy efficiency and the fan coil units have high performance, for complete indoor comfort that also has an eye on consumption. Moreover, thanks to the building management system, SiOS Control, the management is total and integrated.



Plant operation

- LOW-TEMPERATURE RADIATION
- VENTILATED HEATING
- COOLING
- DEHUMIDIFICATION
- AIR FILTERING
- DHW UP TO 75°C
- AIR EXCHANGE
- MOULD PREVENTION
- REMOTE PLANT SUPERVISION

Heat pumps, for maximum efficiency

The evolution of buildings and their envelopes has also determined a change in the new plants. Heat pumps are increasingly becoming the protagonists of the plant as the sole generator, able to optimise energy consumption and promote the use of renewable energy sources.

Olimpia Splendid offers a range of solutions that are specific for every climate, distinguished by their extremely high energy efficiency (up to A+++) and maximum reliability, thanks also to a patented technology for the simultaneous production of comfort and DHW up to 75°C.



Radiant fan coil units as new plant terminals

The radiant fan coil units offer year-round comfort (heating and cooling) that can be compared to that of floor heating, with always lower installation costs and a more economical management of the plant in the warmer climate zones.

First company to introduce slim and ultraslim radiant fan coil units on the market, specifically for residential plants, Olimpia Splendid still today stands out in the segment for a range of solutions entirely designed and manufactured in Italy and with a patented radiant technology, which allows the static operation of the machine during heating, for complete absence of noise.



HRV for improved indoor quality of air

With the evolution of building envelopes, air exchange and air treatment have become necessary for the correct maintenance of the quality of air of indoor settings. Should the simple opening of windows not be possible or sufficient, the solutions of Heat Recovery Ventilation offer a valid support.

Olimpia Splendid offers decentralised solutions, for simplified installation, or centralised as part of a renovation or new build. All equipped with brushless EC motors, with reduced energy consumption, Olimpia Splendid's HRV units are fitted with heat recovery units to transfer energy from the air extracted from indoor environments to the fresh air supplied from outside, limiting the activation of the air-conditioning system and improving the building's energy performance.



BMS for the centralised management of the plant

The centralised management of the plant allows optimisation and greater efficiency according to our habits and ways of living in our buildings.

SiOS Control is the Building Management System by Olimpia Splendid that allows a simple, intuitive and customisable management of the plant. It is possible to control the individual components: heat pump, fan coil units, floor heating, towel warmers and HRV. The management can take place either on site or remotely, through the web platform (Cloud) or mobile application

SHERPA AQUADUE

Multi-purpose air water
heat pumps



SHERPA

Traditional air water
heat pumps



SHERPA COLD

Air water heat pumps for cold
climate



SHERPA MONOBLOC

Monobloc air water heat pumps



SHERPA SHW

Water heater in heat pump



SiOS CONTROL

Central system management,
locally or remotely



SiOS

Olimpia
integrate

DS®

Splendid
d systems

SITALI

Decentralised and centralised HRV



Bi2 WALL

High wall fan coil units



Bi2 AIR

Fan coils units with integral design



Ci2 WALL

High wall fan coil units



Bi2 SMART


Total flat fan coil units



Bi2 NAKED

Recessed fan coil units



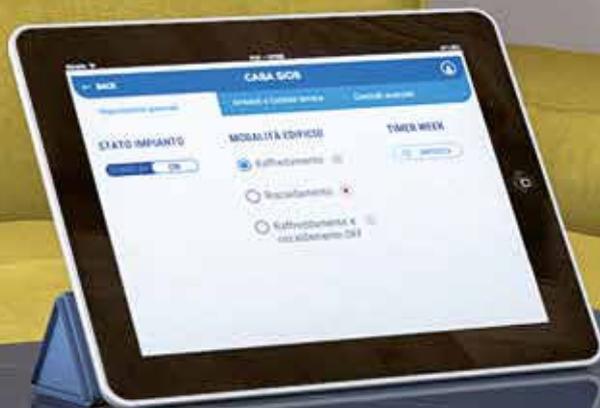



SiOS CONTROL

Building Management
System

SiOS CONTROL

Central system management, locally or remotely

Complete and intuitive

SiOS Control is the BMS (Building Management System) by Olimpia Splendid that allows simple management of the plant for heating, cooling, air treatment and domestic hot water. Through an intuitive graphical interface, that can be customised based on the characteristics of each environment, you can control individual system components: heat pumps, fan coil units, floor heating, towel warmers and HRV, from both the Olimpia Splendid range and other manufacturers*. For a truly complete control. Furthermore, with SiOS Control, you can even manage things remotely, through the web (Cloud) platform or a mobile application. Complete, intuitive and smart.



What can it manage?


Sherpa range of heat pumps or third-party generators*



Fan coil units range and floor heating Bi2




Sitali HRV range** or third-party HRV*



Towel warmers**



How does it work?

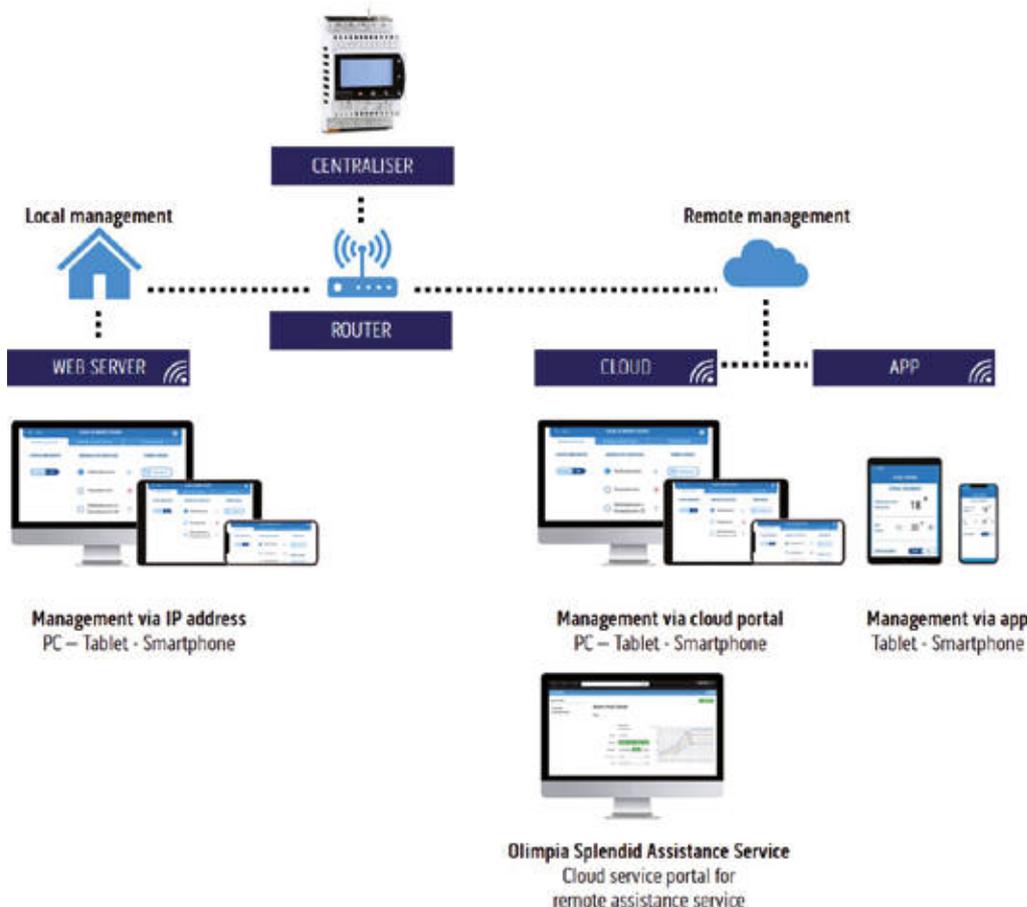

*Requires prior check for compatibility

** Opto-coupler card + relay with power supply required, check details on the technical manual for specific characteristics.

Type of control

DIRECT ZONE:


- up to 30 Bi2 fan coil units and relative controls (divided up to a maximum of 10 independent environments);
- 1 heat pump from among Sherpa S2/S3, Sherpa Aquadue S2/S3, Sherpa Tower S2/S3, Sherpa Aquadue Tower S2/S3 and Sherpa Monobloc S1/S2 E (or other third-party generators)*;
- up to 4 towel warmers, with relative thermostats**;
- 1 direct zone circulator output;
- 1 outdoor air temperature probe.

HVR:

- 1 group output for Sitali** (or other third-party HVR)*.

Simplified installation

Easy installation through a first guided configuration to be able to customise SiOS Control both to the characteristics of the plant and to those of the building in which it will be installed.

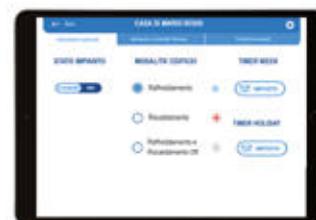

Customised environments

Possibility of creating customised environments in order to reproduce the layout of each individual building. Possibility of creating up to 10 total environments with fan coil units and radiant floor. Possibility of naming the environments and assigning dedicated icons to them.



Comfort management for every season

SiOS Control can manage cooling, heating, domestic hot water and air treatment. The intuitive graphic interface with icons changes colour based on the functions of the plant and whether or not the various environments are active or shut off.



Timer with scenarios

SiOS Control has weekly timers. It manages up to 4 timers and each individual timer can be set with 6 daily time ranges. For each time range there are 5 scenarios available. Economy, Comfort, Night are the pre-set scenarios, while the 2 Individual scenarios can be set directly by the user.



Heat pump temperature settings

With SiOS Control, the user can change the water set points of the heat pump and activate any climatic curves for summer and winter operation.



* Requires prior check for compatibility

** Opto-coupler card + relay with power supply required, check details on the technical manual for specific characteristics.
NOTE 1: The application for Tablets and Smartphones allows simplified management of the functions.

MANAGEMENT

Only local management

Connecting the B0858 central control unit to an Access Point by means of a network cable, it is possible to manage SiOS Control remotely in the local Wi-Fi, through PCs, Tablets, Smartphones and a common internet browser.



Remote management (also local)

Connecting the B0858 central control unit to an internet router by means of a network cable, it is possible to manage SiOS Control remotely through the cloud, through PCs, Tablets, Smartphones and a common internet browser. In addition, for a simplified remote management, the SiOS Control App is available that assumes the main functions.



The remote use requires a two-year subscription.

Remote assistance

The Olimpia Splendid Service Centre, through the Cloud, will be able to carry out assistance to the plant and its machines even remotely, for a faster and more efficient service in case of plant problems or alarms.




COMPONENTS

	CODE	DESCRIPTION
	B0858	Control centraliser The centraliser is the component necessary for all SiOS Control installations. It features a touch display, an output for the network cable and Modbus RTU 0-10V outputs, as well as relays for the various system components.
	B0860	Wall ambient T-H probe kit Wall thermostat necessary to control installations and/or environments with towel warmers. Shows the temperature and relative humidity.
	B0861	Built-in ambient T-H probe kit Built-in thermostat necessary to control installations and/or environments with towel warmers. Shows the temperature and relative humidity.
	B0863	RTU-ASCII fan coil signal converter kit RTU-ASCII converter required for those installations where there are direct water zones (Recommended to use one over 500 meters of communication line).
	B0623	Outdoor air temperature probe kit Shielded probe to measure the outdoor air temperature

The transformers required to power the individual devices, as indicated in the manuals and installation diagrams of SiOS Control, are not included in the Olimpia Splendid supply.

Example of a SiOS control diagram with management of:

- Sherpa Aquadue Tower heat pump
- Bi2 Air and Bi2 Wall fan coil units
- DHW and towel warmer
- Sitali SF150 S1 and Sitali SFE100 S1

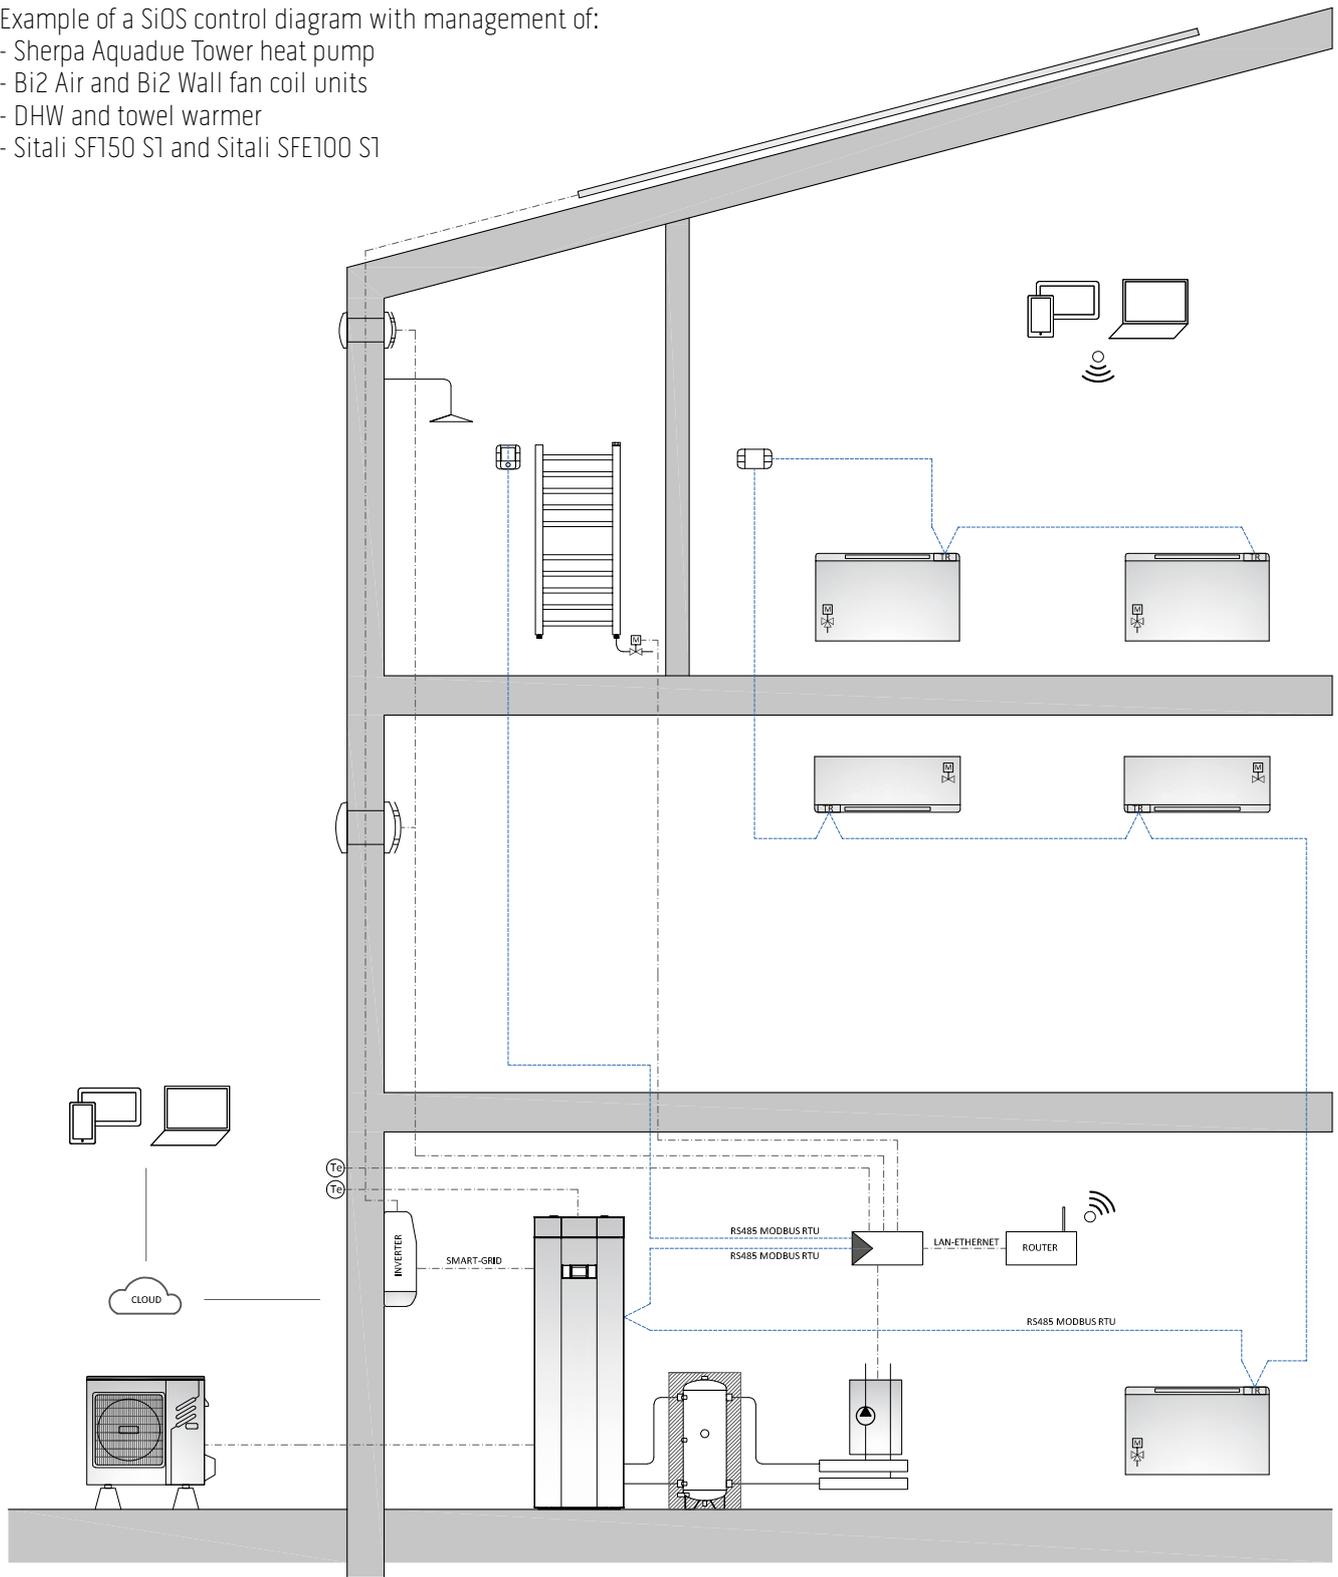

Note: the diagram only has the purpose of illustrating the system, for all the characteristics and connections, refer to the relative installation manuals

Legend:


	B0858	CENTRAL SiOS CONTROL UNIT
	B0860	WALL MOUNTED ROOM PROBE KIT T-H
	B0861	BUILT-IN ROOM PROBE KIT T-H
	B0863	RTU-ASCII FANCOILS SIGNAL CONVERTER KIT
	B0623	OUTDOOR AIR TEMPERATURE PROBE KIT





SHERPA

Air-water heat pumps, split and single-piece, and heat pump water heaters

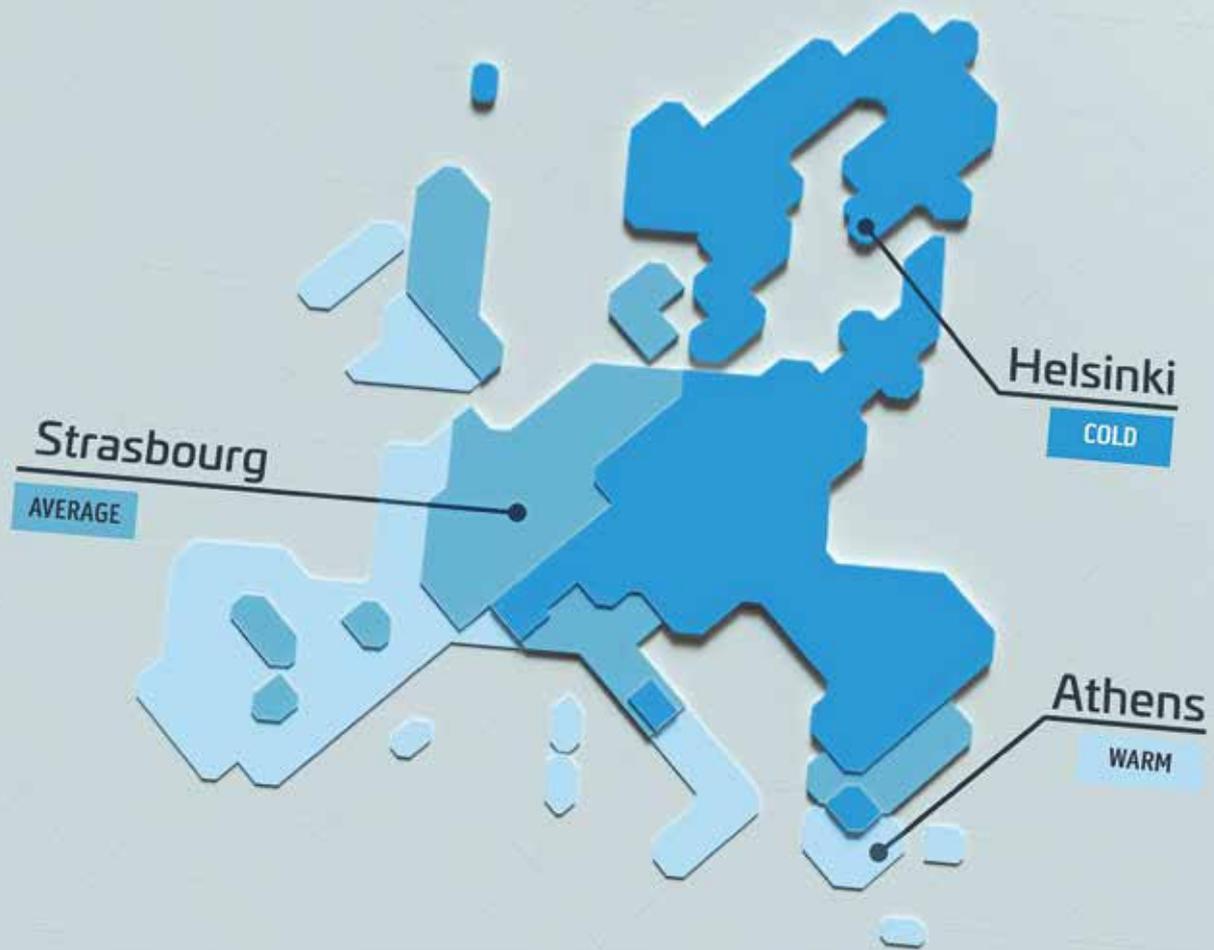

Specific solutions for each European climate

To achieve maximum efficiency and reliability in every project

Warm climatic zones, Average and Cold

The relevant European regulations identify, within the reference territory, 3 different climatic zones, in which the project temperatures relating to indoor comfort systems are profoundly different. A comparative study commissioned by Olimpia Splendid has shown how each of these climates determines a different distribution of the thermal and cooling load inside buildings and a specific behaviour of the heat pumps.

Specific configurations to maximise efficiency and comfort

To optimize the efficiency and output power of the heat pumps according to the external temperature, Olimpia Splendid offers the possibility to choose between different types of heat pumps, specially designed for the reference European climates.



● Refrigerator circle water-water
dedicated to DHW production

● Refrigerator circle air-water
dedicated to indoor comfort



Aquadue patented technology

Innovation that ensures simultaneously comfort and DHW



Double refrigeration circuit

In Olimpia Splendid heat pumps equipped with Aquadue technology, the two interconnected cooler cycles make it possible to make the heating/cooling independent from the DHW production, allowing it to operate in parallel. A feature that avoids interruptions in the provision of home comfort.

Domestic Hot Water up to 75°C

The double refrigeration circuit present in the Aquadue models also allows the production of DHW at a high temperature (up to 75°C), regardless of the external climatic conditions. Thus it is possible to reduce the volume of the storage tank up to 30% and to avoid highly energy-intensive anti-legionella cycles (normally carried out with the use of electric heating elements).

Coverage of the renewable quantity for the production of DHW

Thanks to the efficient management of heat, Aquadue technology facilitates the achievement, in buildings with a high energy class, of the coverage quantities from renewable energy without the installation of additional devices.

Split air-water heat pumps

Production of comfort and DHW

SINGLE-PHASE

		4	6	8	10	
SHERPA AQUADUE Multi-purpose  Download Technical data sheet for the entire S2 range 		Outdoor units	UE Sherpa S2 E 4 (02001)	UE Sherpa S2 E 6 (02002)		
		SUSPENDED VERSION	UI Sherpa Aquadue S2 E Small (02042)			
		TOWER VERSION	UI Sherpa Aquadue Tower S2 E Small (02044)			
		       				
SHERPA Traditional  Download Technical data sheet for the entire S2 range 		Outdoor units	UE Sherpa S2 E 4 (02001)	UE Sherpa S2 E 6 (02002)		
		SUSPENDED VERSION	UI Sherpa S2 E Small (02040)			
		TOWER VERSION	UI Sherpa Tower S2 E Small (02046)			
		       				
SHERPA AQUADUE Multi-purpose 		Outdoor units	UE Sherpa S3 E 4 (02284)	UE Sherpa S3 E 6 (02285)	UE Sherpa S3 E 8 (02286)	UE Sherpa S3 E 10 (02287)
		SUSPENDED VERSION	UI Sherpa Aquadue S3 E Small (02296)			
		TOWER VERSION	UI Sherpa Aquadue Tower S3 E Small (02298)			
		       				
SHERPA Traditional 		Outdoor units	UE Sherpa S3 E 4 (02284)	UE Sherpa S3 E 6 (02285)	UE Sherpa S3 E 8 (02286)	UE Sherpa S3 E 10 (02287)
		SUSPENDED VERSION	UI Sherpa S3 E Small (02294)			
		TOWER VERSION	UI Sherpa Tower S3 E Small (02300)			
		       				
SHERPA COLD For cold climates 		Outdoor units				UE Sherpa Cold 10 (02269)
		SUSPENDED VERSION				UI Sherpa Cold (02276)
						

Energy efficiency classes in heating, water at 35°C (average climate). For Sherpa SHW classes according to Regulation EU 812/2013.

THREE-PHASE

12	14	15	16	10T	12T	14T	15T	16T	18T
UE Sherpa S2 12 (02005)	UE Sherpa S2 14 (02006)		UE Sherpa S2 16 (02007)		UE Sherpa S2 12T (02008)	UE Sherpa S2 14T (02009)		UE Sherpa S2 16T (02010)	
UI Sherpa Aquadue S2 Big (02043)									
UI Sherpa Aquadue Tower S2 Big (02045)									
A+++	A++		A++		A+++	A+++		A++	
UE Sherpa S2 12 (02005)	UE Sherpa S2 14 (02006)		UE Sherpa S2 16 (02007)		UE Sherpa S2 12T (02008)	UE Sherpa S2 14T (02009)		UE Sherpa S2 16T (02010)	
UI Sherpa S2 Big (02041)									
UI Sherpa Tower S2 Big (02047)									
A+++	A++		A++		A+++	A+++		A++	
UE Sherpa S3 E 12 (02288)	UE Sherpa S3 E 14 (02289)		UE Sherpa S3 E 16 (02290)		UE Sherpa S3 E 12T (02291)	UE Sherpa S3 E 14T (02292)		UE Sherpa S3 E 16T (02293)	
UI Sherpa Aquadue S3 E Big (02297)									
UI Sherpa Aquadue Tower S3 E Big (02299)									
A+++ 	A+++ 		A+++ 		A+++ 	A+++ 		A+++ 	
UE Sherpa S3 E 12 (02288)	UE Sherpa S3 E 14 (02289)		UE Sherpa S3 E 16 (02290)		UE Sherpa S3 E 12T (02291)	UE Sherpa S3 E 14T (02292)		UE Sherpa S3 E 16T (02293)	
UI Sherpa S3 E Big (02295)									
UI Sherpa Tower S3 E Big (02301)									
A+++ 	A+++ 		A+++ 		A+++ 	A+++ 		A+++ 	
		UE Sherpa Cold 15 (02273)					UE Sherpa Cold 15T (02274)		UE Sherpa Cold 18T (02275)
		UI Sherpa Cold (02277)					UI Sherpa Cold (02277)		UI Sherpa Cold (02278)
		A+++					A+++		A+++

Monobloc air-water heat pumps and heat pump water heaters

SINGLE-PHASE

Production of comfort and DHW

SHERPA MONOBLOC Monobloc

S1

Outdoor units

4

6

8

10

Sherpa Monobloc
S1 E 8 (02022)

A+++



Download
Technical data sheet for
the entire S1 range



SHERPA MONOBLOC Monobloc

S2

Outdoor units

Sherpa Monobloc
S2 E 6 (02303)

Sherpa Monobloc
S2 E 8 (02304)

Sherpa Monobloc
S2 E 10 (02305)

A+++



A+++



A+++



Production of only DHW

SHERPA SHW Water heater in heat pump

S2

Outdoor units

200

260

Sherpa SHW S2 200 (02385)

Sherpa SHW S2 260S (02386)

A+

A+



Energy efficiency classes in heating, water at 35°C (average climate). For Sherpa SHW classes according to Regulation EU 812/2013.



THREE-PHASE

12	14	15	16	10T	12T	14T	15T	16T	18T
					Sherpa Monobloc S1 E 12T (02024)				



Sherpa Monobloc S2 E 12 (02306)	Sherpa Monobloc S2 E 14 (02307)		Sherpa Monobloc S2 E 16 (02308)		Sherpa Monobloc S2 E 12T (02309)	Sherpa Monobloc S2 E 14T (02310)		Sherpa Monobloc S2 E 16T (023011)	
---------------------------------	---------------------------------	--	---------------------------------	--	----------------------------------	----------------------------------	--	-----------------------------------	--



SHERPA AQUADUE



Multi-purpose split heat pumps, suspended and tower versions



DHW AND COMFORT AT THE SAME TIME

The two interconnected refrigerator cycles allow the decoupling of the heating/cooling from the DHW production, enabling them to operate in parallel, avoiding thus interruptions in the domestic comfort supply.



DOMESTIC HOT WATER UP TO 75°C

The storage of DHW at high temperature makes it possible to reduce the volume of the storage tank by up to 30%, and to avoid energy-intensive consumption of the anti-Legionnaire's disease cycles, since they are normally carried out by the use of electric heating elements.



PHOTOVOLTAIC INTEGRATION

Thanks to the appropriate contact, it is possible to activate an increase in the heating/DHW temperature and a decrease in the cooling temperature, thereby accumulating thermal energy in the event of overproduction of the photovoltaic system.



FEATURES


- **Inverter air-water heat pump with R32 refrigerant**
- **Energy efficiency class** in average climate heating up to: A+++ (35°C) and A++ (55°C)
- **Powers available:** 10 powers with refrigerant R32 single-phase (4-6-8-10-12-14-16 kW) and three-phase (12-14-16 kW).
- **Production of DHW** (Domestic Hot Water) at high temperature, up to 75°C.
- **DHW management:** a water/water heat pump unit integrated in the internal unit supplies domestic hot water at high temperature regardless of the external climatic conditions.
- **Absolute continuity availability of DHW:** guaranteed by the redundancy of the double refrigeration circuit
- **Anti-legionella cycles that can be avoided** using the high temperature refrigeration cycle.
- **Double stage electric heating elements as standard:** activation of single or double heating element to support the heat pump by means of a simple electronic control configuration. Each stage is activated according to the actual need for thermal power, in order to optimise electricity consumption (supplied disabled by default).
- **Configurable set points:** two set points in cooling, Three set points in heating (one of which for DHW): the set points can also be selected via remote contact.
- **Holiday** and weekly programmer: heating/cooling, DHW, night-time.
- **Climatic curves** with external air temperature probe: two curves available, one for cooling and one for heating. The climatic curves are used to vary the temperature of the water supplying the system according to the external climatic conditions, adjusting the thermal needs of the building, in order to achieve energy savings.
- **Refrigerant gases:** R32* for the reversible circuit dedicated to air conditioning and R134a** for the high temperature circuit dedicated to the production of DHW.
- **Built-in 150 L high efficiency storage tank** (tower version) with an exchange battery surface equal to 1.5 m².
- **Operating limits:** down to -25°C, +43°C (see technical manuals for details).
- **Integrated heating cable** to prevent freezing of water in the tray for sizes 12-14-16 and 12T-14T-16T. The heating cable intervenes during machine defrost operations or when the ambient air is below -7°C and cuts out when it exceeds 4°C (85W power consumption).

AQUADUE TECHNOLOGY

HEATING MODE

+DHW at high temperature


Production of DHW guaranteed regardless of the outside temperature for optimal operation all year round, not guaranteed by traditional heat pumps.

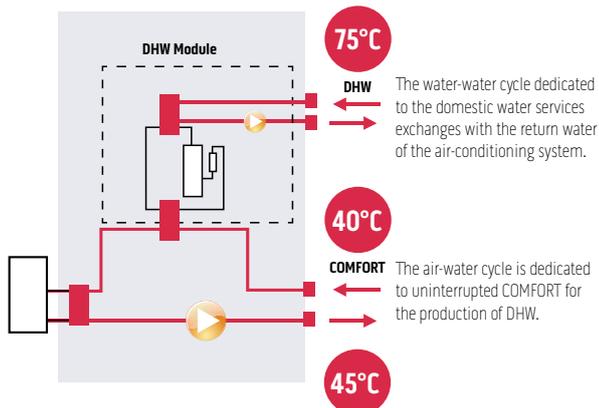

COOLING MODE


+DHW at a high temperature with energy recovery

The energy normally dissipated outside is recovered and used to produce DHW up to 75°C.

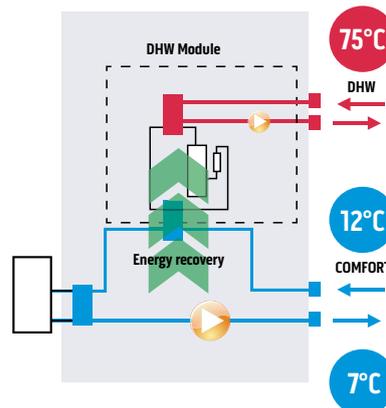

* Equipment not hermetically sealed containing fluorinated gases with an equivalent GWP of 675 (R32)
 ** Non-hermetically sealed equipment containing fluorinated gas with GWP equivalent 1430



LAYOUT, DIMENSIONS, WEIGHT

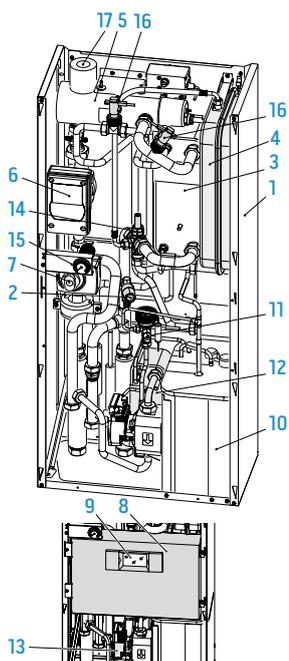

1. Support structure
2. 3 bar safety valve
3. Main circuit heat exchanger
4. Expansion tank
5. Post-heating electric heating element manifold
6. Air conditioner circuit circulation pump
7. 3-way valve
8. Electrical panel assembly
9. Touchscreen display
10. Compressor
11. Expansion valve
12. DHW circuit heat exchangers
13. DHW circuit circulation pump
14. DHW circuit evaporator water flow rate regulator
15. Water circuit pressure gauge
16. Flow switches
17. Automatic vent valves

Suspended indoor units



		4	6	8	10	12	14	16	12T	14T	16T
		SMALL					BIG				
A	mm	500	500	500	500	500	500	500	500	500	500
B	mm	280	280	280	280	280	280	280	280	280	280
C	mm	288	288	288	288	288	288	288	288	288	288
H	mm	1116	1116	1116	1116	1116	1116	1116	1116	1116	1116
Weight	kg	70	70	70	70	70	70	70	70	70	70

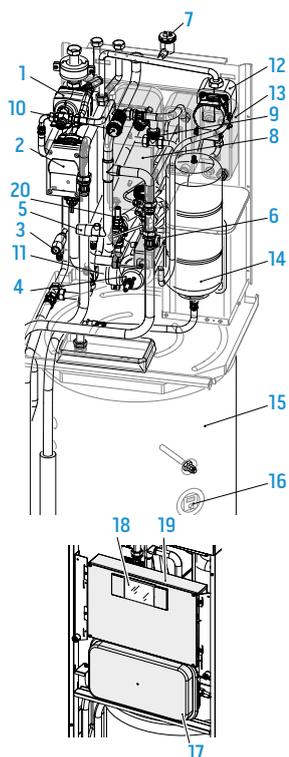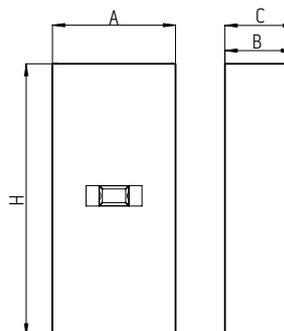

1. 3-way valve
2. Air conditioner circuit circulation pump
3. Safety valves (DHW circuit 6 bar)
4. Post-heating electric heating element manifold
5. Safety valves air conditioner circuit 3 bar
6. Electric heating elements safety thermostats
7. Automatic air vent valve
8. Air conditioner circuit heat exchanger
9. Flow switches
10. Air conditioning circuit pressure gauge
11. DHW thermostatic accumulators
12. DHW circuit circulation pump
13. DHW circuit heat exchangers
14. DHW circuit expansion tank
15. DHW tank
16. Anode tester
17. Air conditioner circuit expansion tank
18. Touch screen display
19. Electrical panel assembly
20. DHW circuit evaporator water flow rate regulator

Tower indoor units

		4	6	8	10	12	14	16	12T	14T	16T
		SMALL					BIG				
A	mm	600	600	600	600	600	600	600	600	600	600
B	mm	600	600	600	600	600	600	600	600	600	600
H	mm	1980	1980	1980	1980	1980	1980	1980	1980	1980	1980
Weight	kg	171	171	171	171	171	171	171	171	171	171

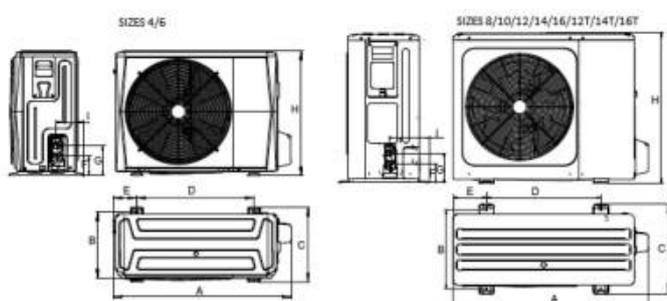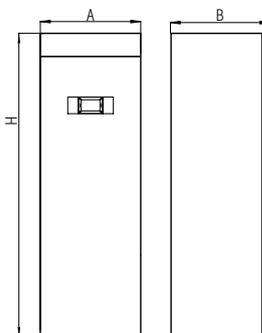

Outdoor units

		4	6	8	10	12	14	16	12T	14T	16T
A	mm	1008	1008	1118	1118	1118	1118	1118	1118	1118	1118
B	mm	375	375	456	456	456	456	456	456	456	456
C	mm	426	426	523	523	523	523	523	523	523	523
D	mm	663	663	656	656	656	656	656	656	656	656
E	mm	134	134	191	191	191	191	191	191	191	191
F	mm	110	110	110	110	110	110	110	110	110	110
G	mm	170	170	170	170	170	170	170	170	170	170
H	mm	712	712	865	865	865	865	865	865	865	865
I	mm	160	160	230	230	230	230	230	230	230	230
Weight	kg	58	58	77	77	96	96	96	112	112	112

SINGLE-PHASE R32 TECHNICAL DATA

				4			6			8			10				
ODU Sherpa S3 E				02284			02285			02286			02287				
IDU Sherpa Aquadue S3 E				02296			02296			02296			02296				
IDU Sherpa Aquadue Tower S3 E				02298			02298			02298			02298				
Compressor frequency				Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum		
PUNCTUAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	2,42	4,25	5,66	3,53	6,20	8,26	4,73	8,30	11,05	5,70	10,0	13,32	
	COP	a7/6 - w30/35	(a)	W/W	-	5,15	-	-	5,00	-	-	5,20	-	-	5,00	-	
	Heating power	a2/1 - w30/35	(b)	kW	2,54	4,45	5,93	3,13	5,50	7,32	4,05	7,10	9,46	4,67	8,20	10,92	
	COP	a2/1 - w30/35	(b)	W/W	-	4,05	-	-	3,95	-	-	4,10	-	-	4,05	-	
	Heating power	a-7/-8 - w30/35	(c)	kW	2,74	4,80	6,39	3,48	6,10	8,12	4,05	7,10	9,46	4,70	8,25	10,99	
	COP	a-7/-8 - w30/35	(c)	W/W	-	3,15	-	-	3,05	-	-	3,25	-	-	3,15	-	
	Heating power	a-15/-16 - w30/35	(d)	kW	1,75	3,07	4,09	2,15	3,77	5,02	3,31	5,80	7,72	3,48	6,10	8,12	
	COP	a-15/-16 - w30/35	(d)	W/W	-	2,88	-	-	2,83	-	-	2,98	-	-	3,01	-	
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	2,48	4,35	5,79	3,62	6,35	8,46	4,67	8,20	10,92	5,70	10,00	13,32	
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	3,80	-	-	3,75	-	-	3,95	-	-	3,80	-	
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	2,91	5,10	6,79	3,31	5,80	7,72	4,22	7,40	9,86	4,47	7,85	10,45	
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	3,00	-	-	3,00	-	-	3,25	-	-	3,20	-	
	Heating power (fancoils)	a-7/-8 - w40/45	(h)	kW	2,45	4,30	5,73	3,08	5,40	7,19	3,76	6,60	8,79	4,19	7,35	9,79	
	COP (fancoils)	a-7/-8 - w40/45	(h)	W/W	-	2,35	-	-	2,40	-	-	2,55	-	-	2,55	-	
	Heating power (fancoils)	a-15/-16 - w40/45	(i)	kW	1,52	2,66	3,54	1,86	3,27	4,35	2,87	5,04	6,71	3,03	5,31	7,07	
	COP (fancoils)	a-15/-16 - w40/45	(i)	W/W	-	2,02	-	-	1,98	-	-	2,32	-	-	2,34	-	
	Cooling power	a35 - w23/18	(l)	kW	2,41	4,50	5,52	3,51	6,55	8,03	4,50	8,40	10,30	5,36	10,00	12,27	
	EER	a35 - w23/18	(l)	W/W	-	5,55	-	-	4,90	-	-	5,05	-	-	4,80	-	
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	2,52	4,70	5,77	3,75	7,00	8,59	3,97	7,40	9,08	4,40	8,20	10,06	
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	3,45	-	-	3,00	-	-	3,38	-	-	3,30	-	
	Energy efficiency class in water heating 35°C	Warmer Climate				A+++			A+++			A+++			A+++		
	SCOP	Warmer Climate				6,46			6,57			6,99			7,09		
	s (Seasonal efficiency for space heating)	Warmer Climate	ηs %			255,4%			259,8%			276,6%			280,5%		
	Energy efficiency class in water heating 35°C	Average Climate				A+++			A+++			A+++			A+++		
	SCOP	Average Climate				4,85			4,95			5,22			5,20		
	s (Seasonal efficiency for space heating)	Average Climate	ηs %			191,0%			195,0%			205,6%			204,8%		
	Energy efficiency class in water heating 35°C	Cold Climate				A++			A++			A++			A++		
	SCOP	Cold Climate				4,06			4,21			4,33			4,32		
s (Seasonal efficiency for space heating)	Cold Climate	ηs %			159,5%			165,3%			170,0%			169,8%			
Energy efficiency class in water heating 55°C	Warmer Climate				A+++			A+++			A+++			A+++			
SCOP	Warmer Climate				4,15			4,21			4,51			4,62			
s (Seasonal efficiency for space heating)	Warmer Climate	ηs %			163,1%			165,4%			177,2%			181,7%			
Energy efficiency class in water heating 55°C	Average Climate				A++			A++			A++			A++			
SCOP	Average Climate				3,31			3,52			3,37			3,47			
s (Seasonal efficiency for space heating)	Average Climate	ηs %			129,5%			137,9%			131,6%			135,7%			
Energy efficiency class in water heating 55°C	Cold Climate				A+			A+			A+			A+			
SCOP	Cold Climate				2,63			2,85			2,88			2,99			
s (Seasonal efficiency for space heating)	Cold Climate	ηs %			102,1%			111,1%			112,1%			116,5%			
Indoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)				dB(A)	46/40			46/40			46/42			46/42			
Indoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)	(n)			dB(A)	38/32			38/32			38/36			38/36			
Outdoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)				dB(A)	56/52			58/53			59/54			60/55			
Outdoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)	(o)			dB(A)	36/32			38/33			39/34			40/35			
System circulator absorption				W	3 - 87			3 - 87			3 - 87			3 - 87			
Supply voltage indoor unit				V/ph/Hz	220-240/1/50			220-240/1/50			220-240/1/50			220-240/1/50			
Maximum current absorbed indoor unit with additional resistors active				A	18,00			18,00			18,00			18,00			
Maximum power absorbed indoor unit with additional active heating elements				kW	4,05			4,05			4,05			4,05			
Additional electric heating elements				kW	1,5+1,5			1,5+1,5			1,5+1,5			1,5+1,5			
Supply voltage outdoor unit				V/ph/Hz	220-240/1/50			220-240/1/50			220-240/1/50			220-240/1/50			
Outdoor unit maximum absorbed current				A	10			11			14			16			
Outdoor unit maximum absorbed power				kW	2,2			2,6			3,3			3,6			
Compressor type					Twin Rotary DC Inverter			Twin Rotary DC Inverter			Twin Rotary DC Inverter			Twin Rotary DC Inverter			
Refrigerant inlet connection diameter				"	1/4"-5/8"			1/4"-5/8"			3/8"-5/8"			3/8"-5/8"			
Coolant gas	(p)				R32			R32			R32			R32			
Global warming potential				GWP	675			675			675			675			
Refrigerant gas charge				kg	1,5			1,5			1,65			1,65			
Additional charge above 15m				g/m	20			20			38			38			
Refrigerant piping length limit				m	2 - 30			2-30			2 - 30			2 - 30			
Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018				m	30			30			20			20			
Hydraulic connections for the technical water system				"	1"			1"			1"			1"			
System technical water expansion tank capacity				l	8			8			8			8			
Load profile according to EN16147					L			L			L			L			
DHW production energy efficiency class	Average Climate				A			A			A			A			
η _{HW} (seasonal production efficiency DHW)	Average Climate				%	106%		106%			86%			86%			
Boiler volume				l	150			150			150			150			
Boiler interior surface material					DD12 glazed steel S235JR			DD12 glazed steel S235JR			DD12 glazed steel S235JR			DD12 glazed steel S235JR			
Heat exchanger in the boiler				m ²	1,5			1,5			1,5			1,5			
Type and thickness of boiler insulation					Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			
Specific dispersion				W/K	2			2			2			2			
DHW expansion tank capacity				l	7			7			7			7			
DHW hydraulic connections				"	3/4"			3/4"			3/4"			3/4"			
DHW circuit heating power	w35 - w55	(r)		kW	2,15			2,15			2,15			2,15			
COP DHW circuit	w35 - w55	(r)		W/W	3,12			3,12			3,12			3,12			
DHW circuit heating power	w12 - w55	(s)		kW	1,60			1,60			1,60			1,6			
COP DHW circuit	w12 - w55	(s)		W/W	2,58			2,58			2,58			2,58			
Sound power indoor unit in heating/cooling + DHW circuit				dB(A)	49			49			49			49			
DHW circuit circulator absorption				W	3 - 43			3 - 43			3 - 43			3 - 43			
DHW circuit coolant gas					R134a			R134a			R134a			R134a			
DHW circuit global warming potential				GWP	1430			1430			1430			1430			
DHW circuit coolant gas load				kg	0,35			0,35			0,35			0,35			

ONLY FOR SHERPA AQUADUE TOWER

(a) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 30°C/35°C
 (b) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 30°C/35°C
 (c) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 30°C/35°C
 (d) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 30°C/35°C
 (e) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 40°C/45°C
 (f) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 40°C/45°C
 (g) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
 (h) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C
 (i) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C
 (l) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 23°C/18°C

(m) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 12°C/7°C
 (n) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
 (o) Sound pressure values measured at a distance of 4 m in free field distance
 (p) Non-air-tightly sealed equipment containing fluorinated GAS
 (q) maximum length of the refrigeration pipes beyond which checks on the minimum surface of the installation rooms are necessary, check the technical manual
 (r) Heating circuit water temperature 35°C/Outlet water temperature 55°C
 (s) Heating circuit water temperature 12°C/Outlet water temperature 55°C
 (t) Non-hermetically sealed equipment containing fluorinated GAS

SINGLE-PHASE R32 TECHNICAL DATA

				T2			T4			T6				
ODU Sherpa S3 E				02288			02289			02290				
IDU Sherpa Aquadue S3 E				02297			02297			02297				
IDU Sherpa Aquadue Tower S3 E				02299			02299			02299				
Compressor frequency				Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum		
PUNCTUAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	5,65	12,10	15,79	6,77	14,50	18,92	7,47	16,00	20,88	
	COP	a7/6 - w30/35	(a)	W/W	-	4,95	-	-	4,70	-	-	4,50	-	
	Heating power	a2/1 - w30/35	(b)	kW	4,34	9,30	12,14	5,32	11,40	14,88	6,07	13,00	16,96	
	COP	a2/1 - w30/35	(b)	W/W	-	3,95	-	-	3,65	-	-	3,50	-	
	Heating power	a-7/8 - w30/35	(c)	kW	4,67	10,00	13,05	5,60	12,00	15,66	6,21	13,3	17,35	
	COP	a-7/8 - w30/35	(c)	W/W	-	3,00	-	-	2,80	-	-	2,70	-	
	Heating power	a-15/16 - w30/35	(d)	kW	3,43	7,35	9,59	3,71	7,94	10,36	4,37	9,35	12,20	
	COP	a-15/16 - w30/35	(d)	W/W	-	2,88	-	-	2,85	-	-	2,66	-	
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	5,74	12,30	16,05	6,63	14,20	18,53	7,47	16,00	20,88	
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	3,80	-	-	3,65	-	-	3,60	-	
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	5,00	10,70	13,96	5,46	11,70	15,27	5,98	12,80	16,70	
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	3,00	-	-	2,86	-	-	2,85	-	
	Heating power (fancoils)	a-7/8 - w40/45	(h)	kW	4,76	10,20	13,31	5,51	11,80	15,40	6,02	12,90	16,83	
	COP (fancoils)	a-7/8 - w40/45	(h)	W/W	-	2,40	-	-	2,35	-	-	2,23	-	
	Heating power (fancoils)	a-15/16 - w40/45	(i)	kW	3,10	6,63	8,65	3,34	7,16	9,34	3,93	8,41	10,97	
	COP (fancoils)	a-15/16 - w40/45	(i)	W/W	-	2,32	-	-	2,29	-	-	2,03	-	
	Cooling power	a35 - w23/18	(l)	kW	5,60	12,00	14,29	6,31	13,00	16,08	6,96	13,50	17,75	
	EER	a35 - w23/18	(l)	W/W	-	4,00	-	-	3,70	-	-	3,61	-	
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	5,42	11,60	13,82	5,93	12,70	15,13	6,54	14,00	16,67	
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	2,75	-	-	2,55	-	-	2,45	-	
EFFICIENCIES	Energy efficiency class in water heating 35°C	Warmer Climate			A+++			A+++			A+++			
	SCOP	Warmer Climate			6,48			6,58			6,47			
	s (Seasonal efficiency for space heating)	Warmer Climate	ηs %		256,1%			260,3%			255,6%			
	Energy efficiency class in water heating 35°C	Average Climate			A+++			A+++			A+++			
	SCOP	Average Climate			4,81			4,72			4,62			
	s (Seasonal efficiency for space heating)	Average Climate	ηs %		189,4%			185,7%			181,7%			
	Energy efficiency class in water heating 35°C	Cold Climate			A+			A++			A++			
	SCOP	Cold Climate			4,08			4,07			4,02			
	s (Seasonal efficiency for space heating)	Cold Climate	ηs %		160,2%			159,6%			157,8%			
	Energy efficiency class in water heating 55°C	Warmer Climate			A+++			A+++			A+++			
	SCOP	Warmer Climate			4,43			4,49			4,48			
	s (Seasonal efficiency for space heating)	Warmer Climate	ηs %		174,1%			176,5%			176,1%			
	Energy efficiency class in water heating 55°C	Average Climate			A++			A++			A++			
	SCOP	Average Climate			3,45			3,47			3,41			
	s (Seasonal efficiency for space heating)	Average Climate	ηs %		135,1%			135,6%			133,3%			
	Energy efficiency class in water heating 55°C	Cold Climate			A+			A+			A+			
	SCOP	Cold Climate			3,02			3,05			3,12			
	s (Seasonal efficiency for space heating)	Cold Climate	ηs %		117,8%			118,9%			121,8%			
	NOISE LEVEL	Indoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)			dB(A)	48/46			48/46			48/46		
		Indoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)		(n)	dB(A)	40/38			40/38			40/38		
Outdoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)				dB(A)	64/60			65/62			68/64			
Outdoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)			(o)	dB(A)	44/40			45/42			48/44			
ELECTRICAL DATA	System circulator absorption			W	8 - 140			8 - 140			8 - 140			
	Supply voltage indoor unit			V/ph/Hz	220-240/1/50			220-240/1/50			220-240/1/50			
	Maximum current absorbed indoor unit with additional resistors active			A	31,0			31,0			31,0			
	Maximum power absorbed indoor unit with additional active heating elements			kW	7,05			7,05			7,05			
	Additional electric heating elements			kW	3,0+3,0			3,0+3,0			3,0+3,0			
	Supply voltage outdoor unit			V/ph/Hz	220-240/1/50			220-240/1/50			220-240/1/50			
COOLING CIRCUIT	Outdoor unit maximum absorbed current			A	23			25			25			
	Outdoor unit maximum absorbed power			kW	5,4			5,7			5,7			
	Compressor type				Twin Rotary DC Inverter			Twin Rotary DC Inverter			Twin Rotary DC Inverter			
	Refrigerant inlet connection diameter			"	3/8"-5/8"			3/8"-5/8"			3/8"-5/8"			
	Coolant gas		(p)		R32			R32			R32			
	Global warming potential			GWP	675			675			675			
	Refrigerant gas charge			kg	1,84			1,84			1,84			
	Additional charge above 15m			g/m	38			38			38			
	Refrigerant piping length limit	min - max		m	2 - 30			2 - 30			2 - 30			
	Refrigerant piping length limit without minimum surface check according to IEC 60333-2-40:2018	max	(q)	m	15			15			15			
HYDRAULIC DATA	Hydraulic connections for the technical water system			"	1"			1"			1"			
	System technical water expansion tank capacity			l	8			8			8			
	Load profile according to EN16147				L			L			L			
	DHW production energy efficiency class	Average Climate			A			A			A			
	ηHW (seasonal production efficiency DHW)	Average Climate		%	81%			81%			81%			
	Boiler volume			l	150			150			150			
	Boiler interior surface material				DD12 glazed steel S235JR			DD12 glazed steel S235JR			DD12 glazed steel S235JR			
	Heat exchanger in the boiler			m²	1,5			1,5			1,5			
	Type and thickness of boiler insulation				Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			
	Specific dispersion			W/K	2			2			2			
INTEGRATED DHW BOILER	DHW expansion tank capacity			l	7			7			7			
	DHW hydraulic connections			"	3/4"			3/4"			3/4"			
	DHW circuit heating power	w35 - w55	(r)	kW	2,15			2,15			2,15			
	COP DHW circuit	w35 - w55	(r)	W/W	3,12			3,12			3,12			
	DHW circuit heating power	w12 - w55	(s)	kW	1,60			1,60			1,60			
	COP DHW circuit	w12 - w55	(s)	W/W	2,58			2,58			2,58			
	Sound power indoor unit in heating/cooling + DHW circuit			dB(A)	49			49			49			
	DHW circuit circulator absorption			W	3 - 43			3 - 43			3 - 43			
	DHW circuit coolant gas		(t)		R134a			R134a			R134a			
	DHW circuit global warming potential			GWP	1430			1430			1430			
DHW circuit coolant gas load			kg	0,35			0,35			0,35				

(a) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 30°C/35°C
 (b) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 30°C/35°C
 (c) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 30°C/35°C
 (d) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 30°C/35°C
 (e) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 40°C/45°C
 (f) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 40°C/45°C
 (g) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
 (h) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C
 (i) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 23°C/18°C
 (m) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 12°C/7°C
 (n) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
 (o) Sound pressure values measured at a distance of 4 m in free field distance
 (p) Non-air-tightly sealed equipment containing fluorinated GAS
 (q) maximum length of the refrigeration pipes beyond which checks on the minimum surface of the installation rooms are necessary, check the technical manual
 (r) Heating circuit water temperature 35°C/Outlet water temperature 55°C
 (s) Heating circuit water temperature 12°C/Outlet water temperature 55°C
 (t) Non-hermetically sealed equipment containing fluorinated GAS

THREE-PHASE R32 TECHNICAL DATA


				12T			14T			16T				
ODU Sherpa S3 E				02291			02292			02293				
IDU Sherpa Aquadue S3 E				02297			02297			02297				
IDU Sherpa Aquadue Tower S3 E				02299			02299			02299				
Compressor frequency				Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum		
PUNCTUAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	5,65	12,10	15,79	6,77	14,50	18,92	7,47	16,00	20,88	
	COP	a7/6 - w30/35	(a)	W/W	-	4,95	-	-	4,70	-	-	4,50	-	
	Heating power	a2/1 - w30/35	(b)	kW	4,34	9,30	12,14	5,32	11,40	14,88	6,07	13,00	16,96	
	COP	a2/1 - w30/35	(b)	W/W	-	3,95	-	-	3,65	-	-	3,50	-	
	Heating power	a-7/-8 - w30/35	(c)	kW	4,67	10,00	13,05	5,60	12,00	15,66	6,21	13,30	17,35	
	COP	a-7/-8 - w30/35	(c)	W/W	-	3,00	-	-	2,80	-	-	2,70	-	
	Heating power	a-15/-16 - w30/35	(d)	kW	3,43	7,35	9,59	3,71	7,94	10,36	4,37	9,35	12,20	
	COP	a-15/-16 - w30/35	(d)	W/W	-	2,88	-	-	2,85	-	-	2,66	-	
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	5,74	12,30	16,05	6,63	14,20	18,53	7,47	16,00	20,88	
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	3,80	-	-	3,65	-	-	3,60	-	
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	5,00	10,70	13,96	5,46	11,70	15,27	5,98	12,80	16,70	
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	3,00	-	-	2,86	-	-	2,85	-	
	Heating power (fancoils)	a-7/-8 - w40/45	(h)	kW	4,76	10,20	13,31	5,51	11,80	15,40	6,02	12,90	16,83	
	COP (fancoils)	a-7/-8 - w40/45	(h)	W/W	-	2,40	-	-	2,35	-	-	2,23	-	
	Heating power (fancoils)	a-15/-16 - w40/45	(i)	kW	3,10	6,63	8,65	3,34	7,16	9,34	3,93	8,41	10,97	
	COP (fancoils)	a-15/-16 - w40/45	(i)	W/W	-	2,32	-	-	2,29	-	-	2,03	-	
	Cooling power	a35 - w23/18	(l)	kW	5,60	12,00	14,29	6,31	13,00	16,08	6,96	13,50	17,75	
	EER	a35 - w23/18	(l)	W/W	-	4,00	-	-	3,70	-	-	3,61	-	
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	5,42	11,60	13,82	5,93	12,70	15,13	6,54	14,00	16,67	
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	2,75	-	-	2,55	-	-	2,45	-	
	Energy efficiency class in water heating 35°C	Warmer Climate				A+++			A+++			A+++		
	SCOP	Warmer Climate				6,47			6,57			6,28		
	s (Seasonal efficiency for space heating)	Warmer Climate	ηs %			255,6%			259,8%			248,1%		
	Energy efficiency class in water heating 35°C	Average Climate				A+++			A+++			A+++		
	SCOP	Average Climate				4,81			4,72			4,62		
	s (Seasonal efficiency for space heating)	Average Climate	ηs %			189,3%			185,6%			181,6%		
	Energy efficiency class in water heating 35°C	Cold Climate				A++			A++			A++		
SCOP	Cold Climate				4,08			4,07			4,02			
s (Seasonal efficiency for space heating)	Cold Climate	ηs %			160,2%			159,6%			157,8%			
Energy efficiency class in water heating 55°C	Warmer Climate				A+++			A+++			A+++			
SCOP	Warmer Climate				4,42			4,49			4,47			
s (Seasonal efficiency for space heating)	Warmer Climate	ηs %			173,8%			176,4%			175,9%			
Energy efficiency class in water heating 55°C	Average Climate				A++			A++			A++			
SCOP	Average Climate				3,45			3,47			3,41			
s (Seasonal efficiency for space heating)	Average Climate	ηs %			135,1%			135,6%			133,2%			
Energy efficiency class in water heating 55°C	Cold Climate				A+			A+			A+			
SCOP	Cold Climate				3,02			3,05			3,12			
s (Seasonal efficiency for space heating)	Cold Climate	ηs %			117,7%			118,9%			121,8%			
Indoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)				dB(A)	48/46			48/46			48/46			
Indoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)		(n)		dB(A)	40/38			40/38			40/38			
Outdoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)				dB(A)	64/60			65/62			68/64			
Outdoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)		(o)		dB(A)	44/40			45/42			48/44			
System circulator absorption				W	8 - 140			8 - 140			8 - 140			
Supply voltage indoor unit				V/ph/Hz	220-240/1/50			220-240/1/50			220-240/1/50			
Maximum current absorbed indoor unit with additional resistors active				A	31,0			31,0			31,0			
Maximum power absorbed indoor unit with additional active heating elements				kW	7,05			7,05			7,05			
Additional electric heating elements				kW	3,0+3,0			3,0+3,0			3,0+3,0			
Supply voltage outdoor unit				V/ph/Hz	380-415/3/50			380-415/3/50			380-415/3/50			
Outdoor unit maximum absorbed current				A	8			8			8			
Outdoor unit maximum absorbed power				kW	5,4			5,7			5,7			
Compressor type					Twin Rotary DC Inverter			Twin Rotary DC Inverter			Twin Rotary DC Inverter			
Refrigerant inlet connection diameter				"	3/8"-5/8"			3/8"-5/8"			3/8"-5/8"			
Coolant gas		(p)			R32			R32			R32			
Global warming potential				GWP	675			675			675			
Refrigerant gas charge				kg	1,84			1,84			1,84			
Additional charge above 15m				g/m	38			38			38			
Refrigerant piping length limit	min - max			m	2 - 30			2 - 30			2 - 30			
Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018	max	(q)		m	15			15			15			
Hydraulic connections for the technical water system				"	1"			1"			1"			
System technical water expansion tank capacity				l	8			8			8			
Load profile according to EN16147				L	L			L			L			
DHW production energy efficiency class	Average Climate				A			A			A			
η _{HW} (seasonal production efficiency DHW)	Average Climate	%			81%			81%			81%			
Boiler volume				l	150			150			150			
Boiler interior surface material					DD12 glazed steel S235JR			DD12 glazed steel S235JR			DD12 glazed steel S235JR			
Heat exchanger in the boiler				m ²	1,5			1,5			1,5			
Type and thickness of boiler insulation					Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			
Specific dispersion				W/K	2			2			2			
DHW expansion tank capacity				l	7			7			7			
DHW hydraulic connections				"	3/4"			3/4"			3/4"			
DHW circuit heating power	w35 - w55	(r)		kW	2,15			2,15			2,15			
COP DHW circuit	w35 - w55	(r)		W/W	3,12			3,12			3,12			
DHW circuit heating power	w12 - w55	(s)		kW	1,60			1,60			1,60			
COP DHW circuit	w12 - w55	(s)		W/W	2,58			2,58			2,58			
Sound power indoor unit in heating/cooling + DHW circuit				dB(A)	49			49			49			
DHW circuit circulator absorption				W	3 - 43			3 - 43			3 - 43			
DHW circuit coolant gas				(t)	R134a			R134a			R134a			
DHW circuit global warming potential				GWP	1430			1430			1430			
DHW circuit coolant gas load				kg	0,35			0,35			0,35			

(a) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 30°C/35°C
 (b) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 30°C/35°C
 (c) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 30°C/35°C
 (d) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 30°C/35°C
 (e) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 40°C/45°C
 (f) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 40°C/45°C
 (g) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
 (h) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C
 (i) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 23°C/18°C

(m) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 12°C/7°C
 (n) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
 (o) Sound pressure values measured at a distance of 4 m in free field distance
 (p) Non-air/tightly sealed equipment containing fluorinated GAS
 (q) maximum length of the refrigeration pipes beyond which checks on the minimum surface of the installation rooms are necessary, check the technical manual
 (r) Heating circuit water temperature 35°C/Outlet water temperature 55°C
 (s) Heating circuit water temperature 12°C/Outlet water temperature 55°C
 (t) Non-hermetically sealed equipment containing fluorinated GAS

		4			6			8			10			
		Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	
First circuit + second circuit data	Cooling capacity	kw	4.70	0.64	4.70	7.00	0.64	7.00	7.40	0.64	7.40	8.20	0.64	8.20
	DHW yield	kw	0.00	1,28	1,28	0.00	1,28	1,28	0.00	1,28	1,28	0.00	1,28	1,28
	Absorption	kw	1.36	0.56	1.17	2.33	0.56	2.00	2.19	0.56	1.87	2.48	0.56	2.13
	EER COP		3.45	2.30	4.03	3.00	2.30	3.50	3.38	2.30	3.95	3.30	2.30	3.85

		12			14			16			12T			14T			16T			
		Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	Cooling w7 - a35	DHW w65 - w12	Cooling w7 - A35 DHW w65 - w12	
First circuit + second circuit data	Cooling capacity	kw	11.60	0.64	11.60	12.70	0.64	12.70	14.00	0.64	14.00	11.60	0.64	11.60	12.70	0.64	12.70	14.00	0.64	14.00
	DHW yield	kw	0.00	1.28	1.28	0.00	1.28	1.28	0.00	1.28	1.28	0.00	1.28	1.28	0.00	1.28	1.28	0.00	1.28	1.28
	Absorption	kw	4.22	0.56	3.61	4.98	0.56	4.26	5.71	0.56	4.89	4.22	0.56	3.61	4.98	0.56	4.26	5.71	0.56	4.89
	EER COP		2.75	2.30	3.21	2.55	2.30	2.98	2.45	2.30	2.86	2.75	2.30	3.21	2.55	2.30	2.98	2.45	2.30	2.86

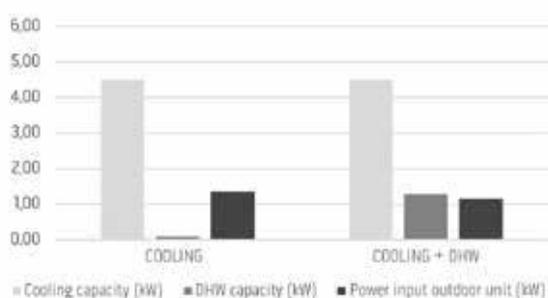


COOLING + DHW WITH ENERGY RECOVERY

During summer operation in cooling mode, the cycle dedicated to DHW production extracts heat from return water from the system circuit.

The cooling requirements of the building is partially satisfied by the DHW cycle and the comfort refrigerating cycle must deliver less power by reducing the speed of the inverter compressor.

The heat taken from the system is recovered in hot water for domestic use. The efficiency of the integrated system increases (ratio between the energy produced and the energy absorbed from the mains).

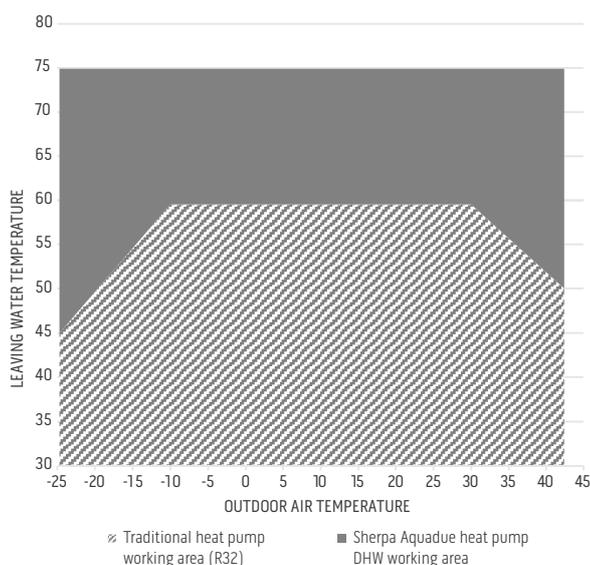

PERFORMANCE AND ENERGY ADVANTAGES

In adverse weather conditions traditional heat pumps decrease thermal output producing water at a lower temperature. Sherpa AQUADUE® as well as extending the area of operation ensures a constant heat output, in the production of Domestic Hot Water. The double refrigerator circuit allows higher DHW production temperatures thanks to the water-water circuit which are independent of outside air temperature. In summer cooling operation the refrigeration cycle dedicated to DHW production removes heat from the comfort circuit increasing the overall efficiency of the system.

ACCESSORIES

			suspended	tower
CONTROLS	B0916	Kit 3-way valve for DHW	●	●
	B0623	Outdoor air temperature probe kit	●	●
	B0624	Kit DHW storage tank sensor	●	●
	B0931	Remote control display kit 10 m	○	○
OTHER	B0918	Kit Sherpa Flex Box AS	≤10	—
	B0961	Kit Sherpa Flex Box AS RAL 9016	≤10	—
STORAGE TANKS / PUFFER	01804	HE 200 L storage tank	○	—
	01805	HE 300 L storage tank	○	—
	01806	HES 300 L solar storage tank	○	—
	01807	Hybride boiler HY 300 L	○	—
	01808	HYS 300 L solar hybrid storage tank	○	—
	01199	Thermal accumulation 50 L	○	○
	01200	Thermal accumulation 100 L	○	○

○ Optional accessory | ● Standard accessory | — Accessory not compatible

Accessory description on page 54

Please note that optional accessories are available for purchase with all models of the heat pump. When compatibility is only possible with certain sizes, the information is shown in the table. Standard accessories are already included in the heat pump code.

SHERPA S3



Traditional split heat pumps, suspended and tower versions



COMPACT TECHNOLOGY

The engineering of the components and the reduced shapes allow it to be installed inside a kitchen cabinet.



DOMESTIC HOT WATER UP TO 60°C

Sherpa supplies Domestic Hot Water with temperatures up to 60°C.



PHOTOVOLTAIC INTEGRATION

Thanks to the appropriate contact, it is possible to activate an increase in the heating/DHW temperature and a decrease in the cooling temperature, thereby accumulating thermal energy in the event of overproduction of the photovoltaic system.




FEATURES

- **Inverter air-water heat pump with R32 coolant gas**
- **Energy efficiency class** in medium climate heating: A+++ (35°C) and A++ (55°C)
- **Available powers:** 10 powers with single-phase R32 coolant gas (4-6-8-10-12-14-16 kW) and three-phase (12-14-16 kW)
- **It supplies DHW** with temperatures up to 60° C.
- **DHW management:** Sherpa allows you to manage domestic hot water with extreme flexibility through two management modes: water probe inserted in the boiler or thermostat contact of the boiler (only for wall-mounted version).
- **Climatic curves** with external air temperature probe: two curves available, one for cooling and one for heating.
- **Smart Grid:** the heat pump is set up to communicate with an intelligent electricity grid and is certified SG Ready, according to the requirements of the German BWP Institute.
- **Configurable set points:** two set points in cooling, three set points in heating (one of which for DHW); the set points can also be selected through a remote contact.
- **Double-stage electric heaters as standard:** configurable as single or double-stage, it can be activated to support the heat pump, through verification by the electronic control of the real thermal capacity of the heat pump. Each stage is activated according to the real need for thermal power, in order to optimise electricity consumption.
- **Daily holiday and weekly programmer:** heating/cooling, DHW, night.
- **Complete management** of anti-legionella cycles.
- **Coolant gas R32***
- **High efficiency integrated 200 L boiler** (only for tower version).
- **Components included** (only for tower version): system filling tap, 3-way valve.
- **Optional kit** (only for tower version): thermostatic mixer and DHW expansion vessel.
- **Operating limits:** up to -25°C, +43°C (see technical manuals for details).
- **Integrated heating cable** to prevent water freezing in the drip pan for sizes 12-14-16 and 12T-14T-16T. The heating cable intervenes during the machine's defrost operations or when the ambient air is below -7°C and stops when it exceeds 4°C (electrical absorption of 85W).

* Equipment not hermetically sealed containing fluorinated gases with an equivalent GWP of 675 (R32)





LAYOUT, DIMENSIONS, WEIGHT

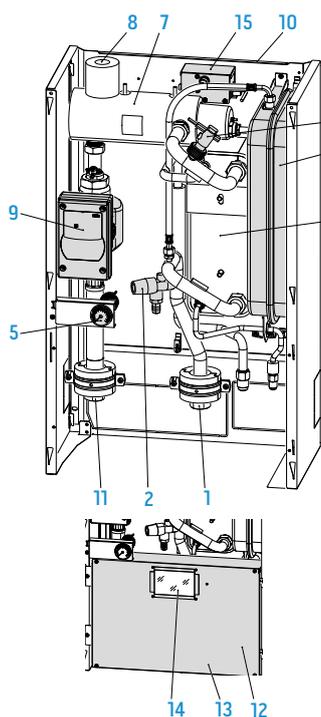

1. Water inlet
2. 3 bar safety valve
3. Plate heat exchanger
4. Flow switch
5. Pressure gauge
6. Expansion tank
7. Electric heating element manifold
8. Automatic vent valve
9. Water pump
10. Support for wall installation
11. System water outlet
12. Electrical panel covers
13. Electrical panel assembly
14. Touch screen display
15. Manual reset electric heating element safety thermostat

Suspended indoor units



		4	6	8	10	12	14	16	12T	14T	16T
		SMALL					BIG				
A	mm	500	500	500	500	500	500	500	500	500	500
B	mm	280	280	280	280	280	280	280	280	280	280
C	mm	296	296	296	296	296	296	296	296	296	296
H	mm	810	810	810	810	810	810	810	810	810	810
Weight	kg	36	36	36	36	36	36	36	36	36	36

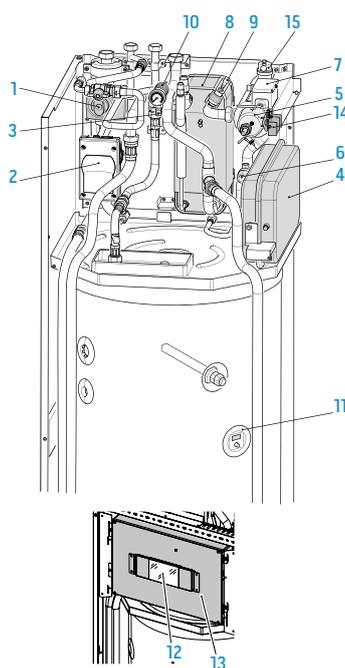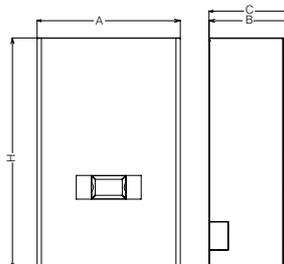

1. 3-way valve
2. Air conditioner circuit circulation pump
3. Safety valves
4. Air conditioner circuit expansion tank
5. Post-heating electric heating element manifold
6. Safety valves air conditioner circuit 3 bar
7. Electric heating elements safety thermostats
8. Air conditioner circuit heat exchanger
9. Flow switches
10. Air conditioning circuit pressure gauge
11. Anode tester
12. Touchscreen display
13. Electrical panel assembly
14. Cable clamp
15. Automatic air vent valves

Tower indoor units

		4	6	8	10	12	14	16	12T	14T	16T
		SMALL					BIG				
A	mm	600	600	600	600	600	600	600	600	600	600
B	mm	600	600	600	600	600	600	600	600	600	600
H	mm	1980	1980	1980	1980	1980	1980	1980	1980	1980	1980
Weight	kg	183	183	183	183	183	183	183	183	183	183

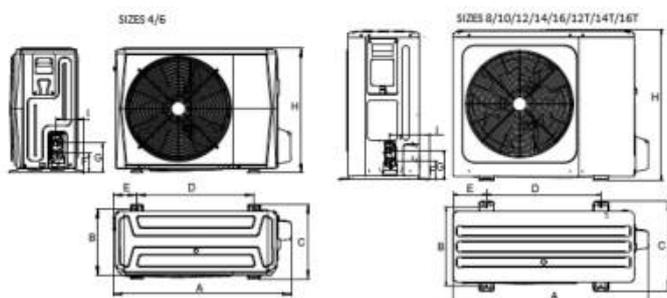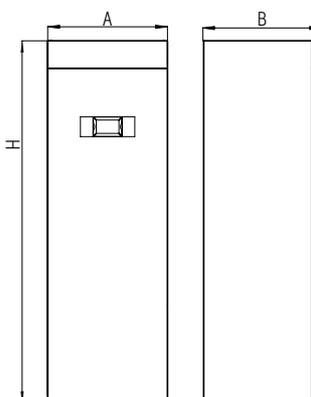

Outdoor units

		4	6	8	10	12	14	16	12T	14T	16T
A	mm	1008	1008	1118	1118	1118	1118	1118	1118	1118	1118
B	mm	375	375	456	456	456	456	456	456	456	456
C	mm	426	426	523	523	523	523	523	523	523	523
D	mm	663	663	656	656	656	656	656	656	656	656
E	mm	134	134	191	191	191	191	191	191	191	191
F	mm	110	110	110	110	110	110	110	110	110	110
G	mm	170	170	170	170	170	170	170	170	170	170
H	mm	712	712	865	865	865	865	865	865	865	865
I	mm	160	160	230	230	230	230	230	230	230	230
Weight	kg	58	58	77	77	96	96	96	112	112	112

SINGLE-PHASE R32 TECHNICAL DATA

				4			6			8			10			
ODU Sherpa S3 E				02284			02285			02286			02287			
IDU Sherpa S3 E				02294			02294			02294			02294			
IDU Sherpa Tower S3 E				02300			02300			02300			02300			
Compressor frequency				Minimum Nominal Maximum			Minimum Nominal Maximum			Minimum Nominal Maximum			Minimum Nominal Maximum			
PUNCTUAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	2,42	4,25	5,66	3,53	6,20	8,26	4,73	8,30	11,05	5,70	10,0	13,32
	COP	a7/6 - w30/35	(a)	W/W	-	5,15	-	-	5,00	-	-	5,20	-	-	5,00	-
	Heating power	a2/1 - w30/35	(b)	kW	2,54	4,45	5,93	3,13	5,50	7,32	4,05	7,10	9,46	4,67	8,20	10,92
	COP	a2/1 - w30/35	(b)	W/W	-	4,05	-	-	3,95	-	-	4,10	-	-	4,05	-
	Heating power	a-7/8 - w30/35	(c)	kW	2,74	4,80	6,39	3,48	6,10	8,12	4,05	7,10	9,46	4,70	8,25	10,99
	COP	a-7/8 - w30/35	(c)	W/W	-	3,15	-	-	3,05	-	-	3,25	-	-	3,15	-
	Heating power	a-15/-16 - w30/35	(d)	kW	1,75	3,07	4,09	2,15	3,77	5,02	3,31	5,80	7,72	3,48	6,10	8,12
	COP	a-15/-16 - w30/35	(d)	W/W	-	2,88	-	-	2,83	-	-	2,98	-	-	3,01	-
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	2,48	4,35	5,79	3,62	6,35	8,46	4,67	8,20	10,92	5,70	10,00	13,32
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	3,80	-	-	3,75	-	-	3,95	-	-	3,80	-
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	2,91	5,10	6,79	3,31	5,80	7,72	4,22	7,40	9,86	4,47	7,85	10,45
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	3,00	-	-	3,00	-	-	3,25	-	-	3,20	-
	Heating power (fancoils)	a-7/8 - w40/45	(h)	kW	2,45	4,30	5,73	3,08	5,40	7,19	3,76	6,60	8,79	4,19	7,35	9,79
	COP (fancoils)	a-7/8 - w40/45	(h)	W/W	-	2,35	-	-	2,40	-	-	2,55	-	-	2,55	-
	Heating power (fancoils)	a-15/-16 - w40/45	(i)	kW	1,52	2,66	3,54	1,86	3,27	4,35	2,87	5,04	6,71	3,03	5,31	7,07
	COP (fancoils)	a-15/-16 - w40/45	(i)	W/W	-	2,02	-	-	1,98	-	-	2,32	-	-	2,34	-
	Cooling power	a35 - w23/18	(l)	kW	2,41	4,50	5,52	3,51	6,55	8,03	4,50	8,40	10,30	5,36	10,00	12,27
	EER	a35 - w23/18	(l)	W/W	-	5,55	-	-	4,90	-	-	5,05	-	-	4,80	-
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	2,52	4,70	5,77	3,75	7,00	8,59	3,97	7,40	9,08	4,40	8,20	10,06
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	3,45	-	-	3,00	-	-	3,38	-	-	3,30	-
	Energy efficiency class in water heating 35°C	Warmer Climate				A+++			A+++			A+++				
	SCOP	Warmer Climate				6,46			6,57			6,99			7,09	
	s (Seasonal efficiency for space heating)	Warmer Climate	ηs %			255,4%			259,8%			276,6%			280,5%	
	Energy efficiency class in water heating 35°C	Average Climate				A+++			A+++			A+++				
	SCOP	Average Climate				4,85			4,95			5,22			5,20	
	s (Seasonal efficiency for space heating)	Average Climate	ηs %			191,0%			195,0%			205,6%			204,8%	
	Energy efficiency class in water heating 35°C	Cold Climate				A++			A++			A++				
	SCOP	Cold Climate				4,06			4,21			4,33			4,32	
	s (Seasonal efficiency for space heating)	Cold Climate	ηs %			159,5%			165,3%			170,0%			169,8%	
Energy efficiency class in water heating 55°C	Warmer Climate				A+++			A+++			A+++					
SCOP	Warmer Climate				4,15			4,21			4,51			4,62		
s (Seasonal efficiency for space heating)	Warmer Climate	ηs %			163,1%			165,4%			177,2%			181,7%		
Energy efficiency class in water heating 55°C	Average Climate				A++			A++			A++					
SCOP	Average Climate				3,31			3,52			3,37			3,47		
s (Seasonal efficiency for space heating)	Average Climate	ηs %			129,5%			137,9%			131,6%			135,7%		
Energy efficiency class in water heating 55°C	Cold Climate				A+			A+			A+					
SCOP	Cold Climate				2,63			2,85			2,88			2,99		
s (Seasonal efficiency for space heating)	Cold Climate	ηs %			102,1%			111,1%			112,1%			116,5%		
Indoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)				dB(A)	46/40			46/40			46/42			46/42		
Indoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)	(n)	dB(A)			38/32			38/32			38/36			38/36		
Outdoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)		dB(A)			56/52			58/53			59/54			60/55		
Outdoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)	(o)	dB(A)			36/32			38/33			39/34			40/35		
System circulator absorption		W			3 - 87			3 - 87			3 - 87			3 - 87		
Supply voltage indoor unit		V/ph/Hz			220-240/1/50			220-240/1/50			220-240/1/50			220-240/1/50		
Maximum current absorbed indoor unit with additional resistors active		A			14,10			14,10			14,10			14,10		
Maximum power absorbed indoor unit with additional active heating elements		kW			3,22			3,22			3,22			3,22		
Additional electric heating elements		kW			1,5+1,5			1,5+1,5			1,5+1,5			1,5+1,5		
Supply voltage outdoor unit		V/ph/Hz			220-240/1/50			220-240/1/50			220-240/1/50			220-240/1/50		
Outdoor unit maximum absorbed current		A			10			11			14			16		
Outdoor unit maximum absorbed power		kW			2,2			2,6			3,3			3,6		
Compressor type					Twin Rotary DC Inverter			Twin Rotary DC Inverter			Twin Rotary DC Inverter					
Refrigerant inlet connection diameter		"			1/4"-5/8"			1/4"-5/8"			3/8"-5/8"					
Coolant gas	(p)				R32			R32			R32					
Global warming potential		GWP			675			675			675					
Refrigerant gas charge		kg			1,5			1,5			1,65					
Additional charge above 15m		g/m			20			20			38					
Refrigerant piping length limit	min - max	m			2 - 30			2-30			2 - 30					
Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018	max	(q)	m		30			30			20					
Hydraulic connections		"			1"			1"			1"					
Capacity of expansion vessel		l			8			8			8					
Load profile according to EN16147					XL			XL			XL					
DHW production energy efficiency class	Average Climate				A+			A+			A+					
η ₁ DHW (seasonal production efficiency DHW)	Average Climate	%			125%			125%			123%					
Boiler volume		l			200			200			200					
Boiler interior surface material					DD12 glazed steel S235JR			DD12 glazed steel S235JR			DD12 glazed steel S235JR					
Heat exchanger in the boiler		m ²			2,4			2,4			2,4					
Type and thickness of boiler insulation					Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm					
Specific dispersion		W/K			2			2			2					
DHW expansion tank capacity		l			7			7			7					
DHW hydraulic connections		"			3/4"			3/4"			3/4"					

ONLY FOR SHERPA TOWER

(a) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 30°C/35°C
 (b) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 30°C/35°C
 (c) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 30°C/35°C
 (d) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 30°C/35°C
 (f) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 40°C/45°C
 (g) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 40°C/45°C
 (h) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
 (i) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C

(l) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 23°C/18°C
 (m) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 12°C/7°C
 (n) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
 (o) Sound pressure values measured at a distance of 4 m in free field distance
 (p) Non-airtightly sealed equipment containing fluorinated GAS
 (q) maximum length of the refrigeration pipes beyond which checks on the minimum surface of the installation rooms are necessary, check the technical manual

SINGLE-PHASE R32 TECHNICAL DATA

				12			14			16			
ODU Sherpa S3 E				02288			02289			02290			
IDU Sherpa S3 E				02295			02295			02295			
IDU Sherpa Tower S3 E				02301			02301			02301			
Compressor frequency				Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
PUNCTUAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	5,65	12,10	15,79	6,77	14,50	18,92	7,47	16,00	20,88
	COP	a7/6 - w30/35	(a)	W/W	-	4,95	-	-	4,70	-	-	4,50	-
	Heating power	a2/1 - w30/35	(b)	kW	4,34	9,30	12,14	5,32	11,40	14,88	6,07	13,00	16,96
	COP	a2/1 - w30/35	(b)	W/W	-	3,95	-	-	3,65	-	-	3,50	-
	Heating power	a-7/-8 - w30/35	(c)	kW	4,67	10,00	13,05	5,60	12,00	15,66	6,21	13,3	17,35
	COP	a-7/-8 - w30/35	(c)	W/W	-	3,00	-	-	2,80	-	-	2,70	-
	Heating power	a-15/-16 - w30/35	(d)	kW	3,43	7,35	9,59	3,71	7,94	10,36	4,37	9,35	12,20
	COP	a-15/-16 - w30/35	(d)	W/W	-	2,88	-	-	2,85	-	-	2,66	-
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	5,74	12,30	16,05	6,63	14,20	18,53	7,47	16,00	20,88
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	3,80	-	-	3,65	-	-	3,60	-
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	5,00	10,70	13,96	5,46	11,70	15,27	5,98	12,80	16,70
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	3,00	-	-	2,86	-	-	2,85	-
	Heating power (fancoils)	a-7/-8 - w40/45	(h)	kW	4,76	10,20	13,31	5,51	11,80	15,40	6,02	12,90	16,83
	COP (fancoils)	a-7/-8 - w40/45	(h)	W/W	-	2,40	-	-	2,35	-	-	2,23	-
	Heating power (fancoils)	a-15/-16 - w40/45	(i)	kW	3,10	6,63	8,65	3,34	7,16	9,34	3,93	8,41	10,97
	COP (fancoils)	a-15/-16 - w40/45	(i)	W/W	-	2,32	-	-	2,29	-	-	2,03	-
	Cooling power	a35 - w23/18	(l)	kW	5,60	12,00	14,29	6,31	13,00	16,08	6,96	13,50	17,75
	EER	a35 - w23/18	(l)	W/W	-	4,00	-	-	3,70	-	-	3,61	-
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	5,42	11,60	13,82	5,93	12,70	15,13	6,54	14,00	16,67
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	2,75	-	-	2,55	-	-	2,45	-
	Energy efficiency class in water heating 35°C	Warmer Climate				A+++		A+++		A+++		A+++	
	SCOP	Warmer Climate				6,48			6,58			6,47	
	s (Seasonal efficiency for space heating)	Warmer Climate	ηs %			256,1%			260,3%			255,6%	
	Energy efficiency class in water heating 35°C	Average Climate				A+++		A+++		A+++		A+++	
	SCOP	Average Climate				4,81			4,72			4,62	
	s (Seasonal efficiency for space heating)	Average Climate	ηs %			189,4%			185,7%			181,7%	
	Energy efficiency class in water heating 35°C	Cold Climate				A+		A++		A++		A++	
	SCOP	Cold Climate				4,08			4,07			4,02	
	s (Seasonal efficiency for space heating)	Cold Climate	ηs %			160,2%			159,6%			157,8%	
Energy efficiency class in water heating 55°C	Warmer Climate				A+++		A+++		A+++		A+++		
SCOP	Warmer Climate				4,43			4,49			4,48		
s (Seasonal efficiency for space heating)	Warmer Climate	ηs %			174,1%			176,5%			176,1%		
Energy efficiency class in water heating 55°C	Average Climate				A++		A++		A++		A++		
SCOP	Average Climate				3,45			3,47			3,41		
s (Seasonal efficiency for space heating)	Average Climate	ηs %			135,1%			135,6%			133,3%		
Energy efficiency class in water heating 55°C	Cold Climate				A+		A+		A+		A+		
SCOP	Cold Climate				3,02			3,05			3,12		
s (Seasonal efficiency for space heating)	Cold Climate	ηs %			117,8%			118,9%			121,8%		
Indoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)				dB(A)	48/46			48/46			48/46		
Indoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)			(n)	dB(A)	40/38			40/38			40/38		
Outdoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)				dB(A)	64/60			65/62			68/64		
Outdoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)			(o)	dB(A)	44/40			45/42			48/44		
System circulator absorption				W	8 - 140			8 - 140			8 - 140		
Supply voltage indoor unit				V/ph/Hz	220-240/1/50			220-240/1/50			220-240/1/50		
Maximum current absorbed internal unit with additional active heating elements				A	27,20			27,20			27,20		
Maximum power absorbed indoor unit with additional active heating elements				kW	6,22			6,22			6,22		
Additional electric heating elements				kW	3,0+3,0			3,0+3,0			3,0+3,0		
Supply voltage outdoor unit				V/ph/Hz	220-240/1/50			220-240/1/50			220-240/1/50		
Outdoor unit maximum absorbed current				A	23			25			25		
Outdoor unit maximum absorbed power				kW	5,4			5,7			5,7		
Compressor type					Twin Rotary DC Inverter		Twin Rotary DC Inverter		Twin Rotary DC Inverter		Twin Rotary DC Inverter		
Refrigerant inlet connection diameter				"	3/8"-5/8"		3/8"-5/8"		3/8"-5/8"		3/8"-5/8"		
Coolant gas			(p)		R32			R32			R32		
Global warming potential				GWP	675			675			675		
Refrigerant gas charge				kg	1,84			1,84			1,84		
Additional charge above 15m				g/m	38			38			38		
Refrigerant piping length limit		min - max		m	2 - 30			2 - 30			2 - 30		
Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018		max	(q)	m	15			15			15		
Hydraulic connections				"	1"			1"			1"		
Capacity of expansion vessel				l	8			8			8		
Load profile according to EN16147					XL			XL			XL		
DHW production energy efficiency class	Average Climate				A		A		A		A		
ηHW (seasonal production efficiency DHW)	Average Climate			%	95%			95%			95%		
Boiler volume				l	200			200			200		
Boiler interior surface material					DD12 glazed steel S235JR		DD12 glazed steel S235JR		DD12 glazed steel S235JR		DD12 glazed steel S235JR		
Heat exchanger in the boiler				m²	2,4			2,4			2,4		
Type and thickness of boiler insulation					Hard expanded polyurethane 55 mm		Hard expanded polyurethane 55 mm		Hard expanded polyurethane 55 mm		Hard expanded polyurethane 55 mm		
Specific dispersion				W/K	2			2			2		
DHW expansion tank capacity				l	7			7			7		
DHW hydraulic connections				"	3/4"			3/4"			3/4"		

(a) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 30°C/35°C
 (b) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 30°C/35°C
 (c) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 30°C/35°C
 (d) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 30°C/35°C
 (e) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 40°C/45°C
 (f) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 40°C/45°C
 (g) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
 (h) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C
 (i) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C

(l) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 23°C/18°C
 (m) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 12°C/7°C
 (n) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
 (o) Sound pressure values measured at a distance of 4 m in free field distance
 (p) Non-airtightly sealed equipment containing fluorinated GAS
 (q) maximum length of the refrigeration pipes beyond which checks on the minimum surface of the installation rooms are necessary, check the technical manual

BMS

HEAT PUMPS

FAN COIL UNITS

HRV

UNICO

MONO AND MULTISPLIT

PORTABLES

THREE-PHASE R32 TECHNICAL DATA

				12T			14T			16T				
ODU Sherpa S3 E				02291			02292			02293				
IDU Sherpa S3 E				02295			02295			02295				
IDU Sherpa Tower S3 E				02301			02301			02301				
Compressor frequency				Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum		
PUNCTUAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	5,65	12,10	15,79	6,77	14,50	18,92	7,47	16,00	20,88	
	COP	a7/6 - w30/35	(a)	W/W	-	4,95	-	-	4,70	-	-	4,50	-	
	Heating power	a2/1 - w30/35	(b)	kW	4,34	9,30	12,14	5,32	11,40	14,88	6,07	13,00	16,96	
	COP	a2/1 - w30/35	(b)	W/W	-	3,95	-	-	3,65	-	-	3,50	-	
	Heating power	a-7/-8 - w30/35	(c)	kW	4,67	10,00	13,05	5,60	12,00	15,66	6,21	13,30	17,35	
	COP	a-7/-8 - w30/35	(c)	W/W	-	3,00	-	-	2,80	-	-	2,70	-	
	Heating power	a-15/-16 - w30/35	(d)	kW	3,43	7,35	9,59	3,71	7,94	10,36	4,37	9,35	12,20	
	COP	a-15/-16 - w30/35	(d)	W/W	-	2,88	-	-	2,85	-	-	2,66	-	
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	5,74	12,30	16,05	6,63	14,20	18,53	7,47	16,00	20,88	
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	3,80	-	-	3,65	-	-	3,60	-	
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	5,00	10,70	13,96	5,46	11,70	15,27	5,98	12,80	16,70	
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	3,00	-	-	2,86	-	-	2,85	-	
	Heating power (fancoils)	a-7/-8 - w40/45	(h)	kW	4,76	10,20	13,31	5,51	11,80	15,40	6,02	12,90	16,83	
	COP (fancoils)	a-7/-8 - w40/45	(h)	W/W	-	2,40	-	-	2,35	-	-	2,23	-	
	Heating power (fancoils)	a-15/-16 - w40/45	(i)	kW	3,10	6,63	8,65	3,34	7,16	9,34	3,93	8,41	10,97	
	COP (fancoils)	a-15/-16 - w40/45	(i)	W/W	-	2,32	-	-	2,29	-	-	2,03	-	
	Cooling power	a35 - w23/18	(l)	kW	5,60	12,00	14,29	6,31	13,00	16,08	6,96	13,50	17,75	
	EER	a35 - w23/18	(l)	W/W	-	4,00	-	-	3,70	-	-	3,61	-	
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	5,42	11,60	13,82	5,93	12,70	15,13	6,54	14,00	16,67	
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	2,75	-	-	2,55	-	-	2,45	-	
EFFICIENCIES	Energy efficiency class in water heating 35°C	Warmer Climate			A+++			A+++			A+++			
	SCOP	Warmer Climate			6,47			6,57			6,28			
	s (Seasonal efficiency for space heating)	Warmer Climate	ηs %		255,6%			259,8%			248,1%			
	Energy efficiency class in water heating 35°C	Average Climate			A+++			A+++			A+++			
	SCOP	Average Climate			4,81			4,72			4,62			
	s (Seasonal efficiency for space heating)	Average Climate	ηs %		189,3%			185,6%			181,6%			
	Energy efficiency class in water heating 35°C	Cold Climate			A++			A++			A++			
	SCOP	Cold Climate			4,08			4,07			4,02			
	s (Seasonal efficiency for space heating)	Cold Climate	ηs %		160,2%			159,6%			157,8%			
	Energy efficiency class in water heating 55°C	Warmer Climate			A+++			A+++			A+++			
	SCOP	Warmer Climate			4,42			4,49			4,47			
	s (Seasonal efficiency for space heating)	Warmer Climate	ηs %		173,8%			176,4%			175,9%			
	Energy efficiency class in water heating 55°C	Average Climate			A++			A++			A++			
	SCOP	Average Climate			3,45			3,47			3,41			
	s (Seasonal efficiency for space heating)	Average Climate	ηs %		135,1%			135,6%			133,2%			
	Energy efficiency class in water heating 55°C	Cold Climate			A+			A+			A+			
	SCOP	Cold Climate			3,02			3,05			3,12			
	s (Seasonal efficiency for space heating)	Cold Climate	ηs %		117,7%			118,9%			121,8%			
	NOISE LEVEL	Indoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)			dB(A)	48/46			48/46			48/46		
		Indoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)		(n)	dB(A)	40/38			40/38			40/38		
Outdoor unit sound power (reg. EU 811-2013/UNI EN 12102:2022)				dB(A)	64/60			65/62			68/64			
Outdoor unit sound pressure (reg. EU 811-2013/UNI EN 12102:2022)			(o)	dB(A)	44/40			45/42			48/44			
ELECTRICAL DATA	System circulator absorption			W	8 - 140			8 - 140			8 - 140			
	Supply voltage indoor unit			V/ph/Hz	220-240/1/50			220-240/1/50			220-240/1/50			
	Maximum current absorbed internal unit with additional active heating elements			A	27,20			27,20			27,20			
	Maximum power absorbed indoor unit with additional active heating elements			kW	6,22			6,22			6,22			
	Additional electric heating elements			kW	3,0+3,0			3,0+3,0			3,0+3,0			
	Supply voltage outdoor unit			V/ph/Hz	380-415/3/50			380-415/3/50			380-415/3/50			
	Outdoor unit maximum absorbed current			A	8			8			8			
	Outdoor unit maximum absorbed power			kW	5,4			5,7			5,7			
COOLING CIRCUIT	Compressor type				Twin Rotary DC Inverter			Twin Rotary DC Inverter			Twin Rotary DC Inverter			
	Refrigerant inlet connection diameter			"	3/8"-5/8"			3/8"-5/8"			3/8"-5/8"			
	Coolant gas		(p)		R32			R32			R32			
	Global warming potential			GWP	675			675			675			
	Refrigerant gas charge			kg	1,84			1,84			1,84			
	Additional charge above 15m			g/m	38			38			38			
	Refrigerant piping length limit	min - max		m	2 - 30			2 - 30			2 - 30			
	Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018	max	(q)	m	15			15			15			
HYDRAULIC DATA	Hydraulic connections			"	1"			1"			1"			
	Capacity of expansion vessel			l	8			8			8			
ONLY FOR SHERPA TOWER	INTEGRATED DHW BOILER	Load profile according to EN16147			XL			XL			XL			
		DHW production energy efficiency class	Average Climate		A			A			A			
	η _{HW} (seasonal production efficiency DHW)	Average Climate		%	95%			95%			95%			
	Boiler volume			l	200			200			200			
	Boiler interior surface material				DD12 glazed steel S235JR			DD12 glazed steel S235JR			DD12 glazed steel S235JR			
	Heat exchanger in the boiler			m ²	2,4			2,4			2,4			
	Type and thickness of boiler insulation				Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			Hard expanded polyurethane 55 mm			
	Specific dispersion			W/K	2			2			2			
	DHW expansion tank capacity			l	7			7			7			
	DHW hydraulic connections			"	3/4"			3/4"			3/4"			

(a) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 30°C/35°C
 (b) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 30°C/35°C
 (c) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 30°C/35°C
 (d) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 30°C/35°C
 (f) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 40°C/45°C
 (g) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 40°C/45°C
 (h) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
 (i) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C

(l) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 23°C/18°C
 (m) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 12°C/7°C
 (n) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
 (o) Sound pressure values measured at a distance of 4 m in free field distance
 (p) Non-airtightly sealed equipment containing fluorinated GAS
 (q) maximum length of the refrigeration pipes beyond which checks on the minimum surface of the installation rooms are necessary, check the technical manual

ACCESSORIES

			suspended	tower
CONTROLS	B0971	Thermostatic mixing valve kit for DHW	—	○
	B0972	Expansion tank kit for DHW	—	○
	B0918	Kit Sherpa Flex Box AS	≤10	—
	B0961	Kit Sherpa Flex Box AS RAL 9016	≤10	—
	B1120	Sherpa Flex Box adapter kit	≤10	—
	B0916	Kit 3-way valve for DHW	○	●
	B0917	Solar thermal probe kit	○	—
	B0623	Outdoor air temperature probe kit	○	○
	B0624	Kit DHW storage tank sensor	○	●
	B0931	Remote control display kit 10 m	○	○
STORAGE TANKS / PUFFER	O1804	HE 200 L storage tank	○	—
	O1805	HE 300 L storage tank	○	—
	O1806	HES 300 L solar storage tank	○	—
	O1807	Hybride boiler HY 300 L	○	—
	O1808	HYS 300 L solar hybrid storage tank	○	—
	B0618	Resistance for boiler 2 kW	○	—
	B0666	Resistance for boiler 3 kW	○	—
	B0617	Resistance flange kit	○	—
	O1199	Thermal accumulation 50 L	○	○
	O1200	Thermal accumulation 100 L	○	○

○ Optional accessory | ● Standard accessory | — Accessory not compatible

Accessory description on page 54

BMS

HEAT PUMPS

FAN COIL UNITS

HRV

UNICO

MONO AND MULTISPLIT

PORTABLES

Please note that optional accessories are available for purchase with all models of the heat pump. When compatibility is only possible with certain sizes, the information is shown in the table. Standard accessories are already included in the heat pump code.

Heat Pump Controls

In-depth analysis of the different control possibilities

The Sherpa and Sherpa Aquadue heat pumps, in the wall-mounted or tower versions, can be configured using an easy and intuitive touchscreen interface, accessible both from the machine and from the optional control panel.

STANDARD | Touchscreen on the machine



MODES

To deactivate the system (stand-by), set the cooling/heating switch or take advantage of the special modes, which ensure maximum energy saving (eco), minimum night noise (night) or DHW production using all the power (turbo).




SET POINT

To change the different set points with a simple touch (if the set-point mode with climate curve is not enabled).




TIMERS

To access the programming available for climate comfort and DHW production, including night and holiday modes.

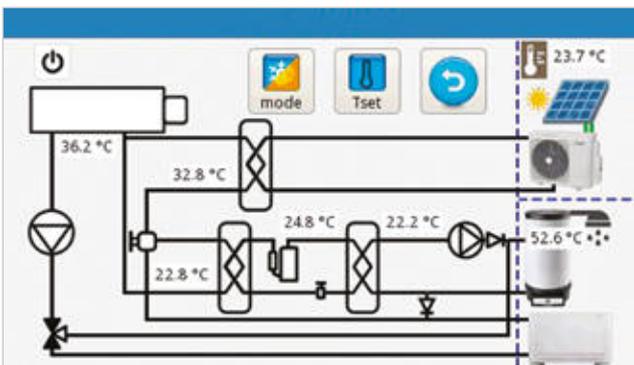


PHOTOVOLTAIC CONTACT

To activate a set point delta on the DHW, the heating and cooling, accumulating thermal energy when there is an overproduction of electricity from the photovoltaic system.

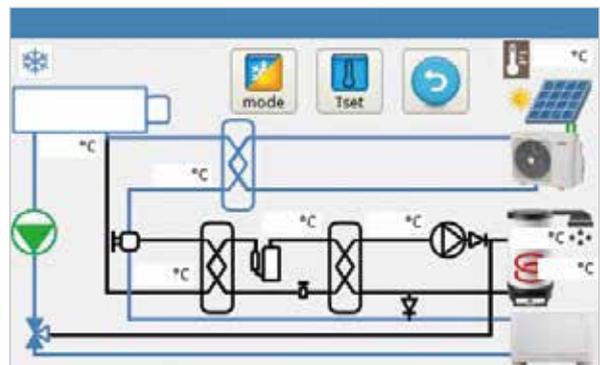

SOLAR THERMAL PROBE

To produce DHW with solar thermal only, inhibiting the heat pump in certain conditions, if the delivery temperature of the solar panels is above a certain value or if the difference between the delivery temperature of the panels and the boiler set point one is higher than the set value.

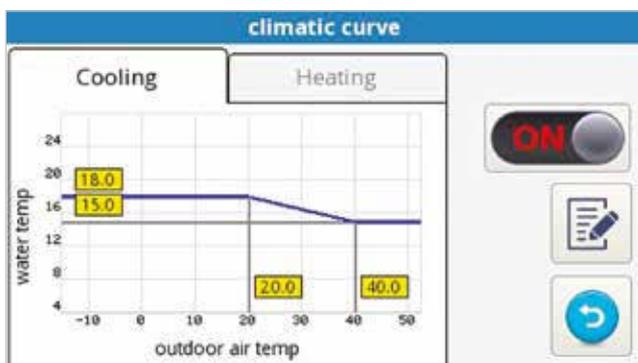

CLIMATIC CURVES

To optimise energy saving, adapting the water temperature to the outside air temperature and therefore to the thermal load.

From the standard touchscreen control it is also possible to manage:

LOW TEMPERATURE ACTIVATION

To activate the heaters and allow heating of the screed in the case of a radiant system.

COMMUNICATION PROTOCOL

For combination with home automation systems, choosing between the ModBus RTU or ASCII protocol.

OPTIONAL | Remote control panel (code B0931)

In cases where control of the heat pump is possible or preferable in an environment other than the one where the internal unit is installed, the control can easily be accessed remotely. Through the special kit for remote control panel, the touchscreen interface is thus accessible up to 10 metres away (cable length 10 metres).



Kit Sherpa Flex Box

Freestanding technical cabinet for Sherpa and Sherpa Aquadue split heat pumps, hanging version



Sherpa Flex Box AS kit is the technical cabinet that makes it possible to create a compact system in heat pump with high installation flexibility. The heat pump and the class C storage tanks make it possible to obtain a very high energy efficiency of the system, even in outdoor installation.

B0918	Kit Sherpa Flex Box AS
B0961	Kit Sherpa Flex Box AS RAL 9016
B0931	Remote control display kit 10 m
B1120	Sherpa Flex Box adapter kit

DOMESTIC WATER STORAGE TANK 150 LT - STAINLESS STEEL

High thermal insulation 50 mm in EPS with graphite to minimise dispersions (class C)



TECHNICAL ACCUMULATION 28 LT - STAINLESS STEEL

(standard on return from the system)
To ensure efficient and safe operation of the heat pump (class C)



FREESTANDING TECHNICAL CABINET

For maximum installation flexibility with a single product. In galvanised steel.



FEATURES

- Dimensions (W x D x H): 998 x 415 x 2280 mm
- System connections from below or from the back
- Condensation trap to prevent any dripping of the condensation on the bottom of the cabinet
- Possible combination with display remote control kit (B0931)
- The distribution and heat emission network downstream of Sherpa Flex Box AS must ensure the circulation of the minimum flow rate of the heat pump in all operating conditions by means of 3-way valves or by-pass systems, in addition, for heat pump sizes 8 and 10, the water content of the distribution network and of the fan coil units must be at least 10 litres (refer to the product installation manuals).


TYPES OF INSTALLATION

The technical cabinet must be installed in an area protected from the weather according to installation manual

- A.** Outdoor support
- B.** Outdoor semi-recessed
- C.** Indoor support
- D.** Indoor semi-recessed

On request, code B0961 can be supplied with RAL 9016 powder-coating. (front/back for upper, lower side and front panels, no backs).



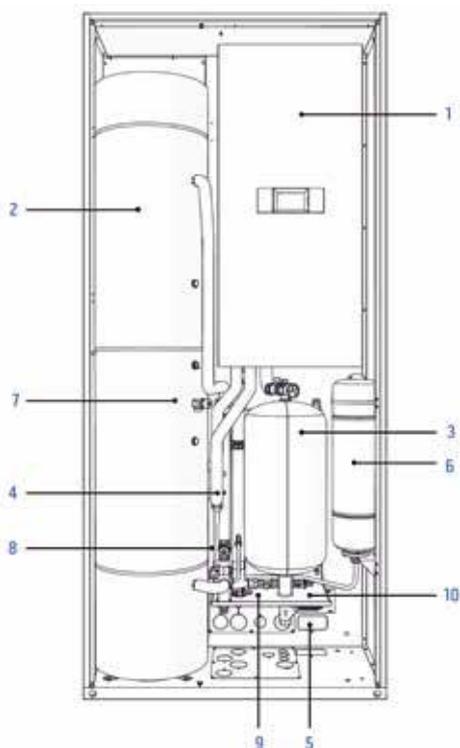


COMPATIBILITY SHERPA AQUADUE

- Sherpa Aquadue S2 E multi-purpose heat pumps, wall-mounted version, in sizes 4 and 6 (UI Sherpa Aquadue S2 E Small 02042).
- Sherpa Aquadue S3 E multi-purpose heat pumps, wall-mounted version, in sizes 4, 6, 8 and 10 (UI Sherpa Aquadue S3 E Small 02296).

1. UI Sherpa Aquadue S2/S3 E Small | **Code 02042/02296**

- 2. Domestic hot water cylinder 150 liters -INOX AISI 316L
- 3. Technical storage tank plant 28 liters -INOX AISI 316L
- 4. Kettle return filter
- 5. Plant return filter
- 6. Sanitary expansion tank 12 liters
- 7. Sanitary safety valve 6 bar
- 8. Sanitary thermostatic mixing valve
- 9. Micrometric holder for By-Pass
- 10. Condensation drip pan

Components included in codes B0918/B0961

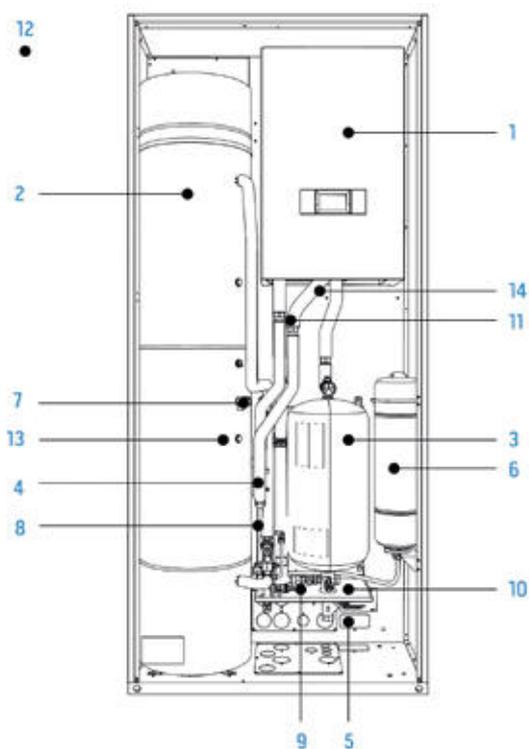

SHERPA COMPATIBILITY

- Sherpa S2 E traditional heat pumps, wall-mounted version, in sizes 4 and 6 (UI Sherpa S2 E Small 02040).
- Sherpa S3 E traditional heat pumps, wall-mounted version, in sizes 4, 6, 8 and 10 (UI Sherpa S3 E Small 02294).

1. UI Sherpa S2/S3 E Small (**02040/02294**)

- 2. Domestic hot water cylinder 150 liters -INOX AISI 316L
- 3. Technical storage tank plant 28 liters -INOX AISI 316L
- 4. Kettle return filter
- 5. Plant return filter
- 6. Sanitary expansion tank 12 liters
- 7. Sanitary safety valve 6 bar
- 8. Sanitary thermostatic mixing valve
- 9. Micrometric holder for By-Pass
- 10. Condensation drip pan

Components included in codes B0918/B0961

- 11. 3-way valve kit for DHW | Code B0916
- 12. Outdoor air temperature probe kit | Code B0623
- 13. DHW cylinder sensor kit | Code B0624
- 14. Flex Box Adapter Kit | Code B1120

SHERPA COLD

Split heat pump for cold climates



HIGH PERFORMANCE ALSO AT LOW TEMPERATURE

The defrosting cycles of the machine are optimised to guarantee high performance even with low external temperatures.



WIDE OPERATING LIMITS

Sherpa Cold can work up to outdoor air temperatures of -32°C and + 48°C



INVERTER SCROLL COMPRESSORS WITH STEAM INJECTION

Technology that improves performance in low temperature applications.




FEATURES

- **Air-to-water inverter heat pump**
- **energy efficiency class** in heating medium climate: up to A+++ (35°C) and A++ (55°C)
- **Energy efficiency class** in heating cold climate: up to A+ (35°C) and A+ (55°C)
- **Available powers:** 2 powers with single-phase R410A refrigerant (10-15 kW) and 2 powers with three-phase R410A refrigerant (15-18 kW)
- **Provides DHW** with temperature up to 55° C.
- Inverter steam-injected Scroll **compressor**
- **Expansion valve:** electronic
- **Refrigerant circuit** with economizer
- Color touchscreen **remotecontrol panel**
- **Maintenance** of machine **output** even in cold outside temperatures
- **Optimization** of machine **defrost cycles** and excellent performance even at cold outside temperatures
- **Operating limits:** down to -32°C, +48°C (see technical manuals for details)
- **Refrigerant gas** R410A*
- **External air probe** integrated in the machine
- **Devices supplied with the machine:**
 - metal frame for outdoor installation touch panel
 - pair of 250 mm high metal feet with vibration dampers
 - rear metal mesh for battery protection
 - integration kit - relay for activation of boiler or other electrical resistance
 - domestic hot water management kit - k1 relay, 1"1/4" 3-way valve, b3 probe
 - heating resistor condensation drain pipe
 - fan grille for noise reduction 800mm diameter (sizes 15,15T,18T)

* Equipment not hermetically sealed containing fluorinated gases with an equivalent GWP of 2088.





LAYOUT, DIMENSIONS, WEIGHT

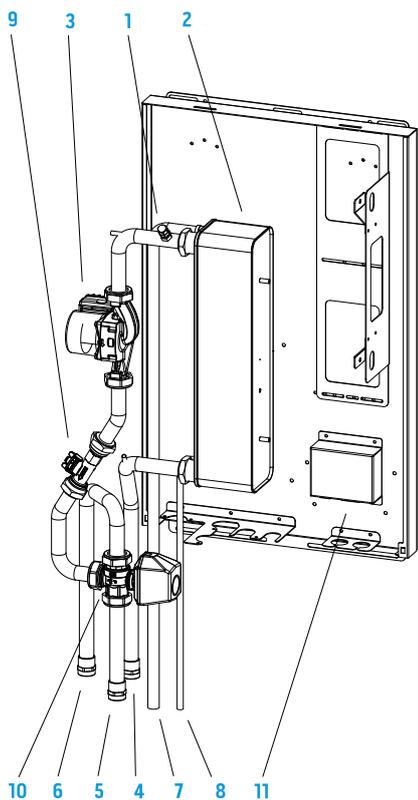

- 1. Vent valve
- 2. Plate heat exchanger
- 3. Circulation pump
- 4. Water inlet hose
- 5. Water outlet hose (system)
- 6. Water outlet hose (DHW)
- 7. Gas passage hose
- 8. Liquid passage hose
- 9. Flow meter
- 10. 3-way valve
- 11. Electrical panel

Indoor Units


		10	15	15T	18T
A	mm	550	550	550	550
B	mm	228	228	228	228
C	mm	147	147	147	147
D	mm	100	100	100	100
H	mm	907	907	907	907
Weight	kg	50	50	50	50

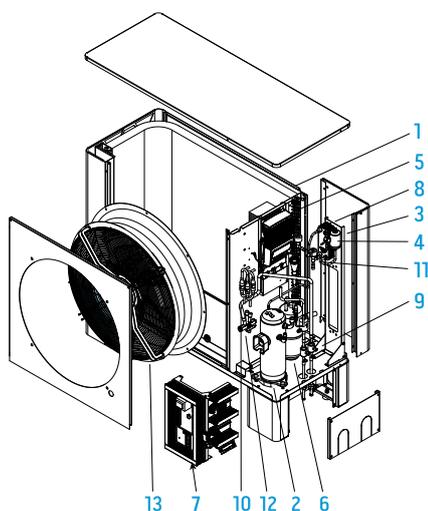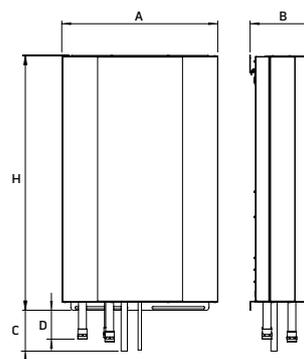

- 1. Evaporator
- 2. Compressor
- 3. Filter
- 4. Liquid indicator
- 5. Inverter
- 6. Liquid tank
- 7. Electrical panel
- 8. Economiser
- 9. Ball valve
- 10. Check valve
- 11. Electronic expansion valve
- 12. 4-way valve
- 13. Fan

Outdoor units

		10	15	15T	18T
A	mm	1406	1591	1591	1591
B	mm	550	546	546	546
C	mm	259	259	259	259
D	mm	225	225	225	225
E	mm	949	1134	1134	1134
F	mm	1167	1271	1271	1271
H	mm	908	1012	1012	1012
Weight	kg	160	200	200	200

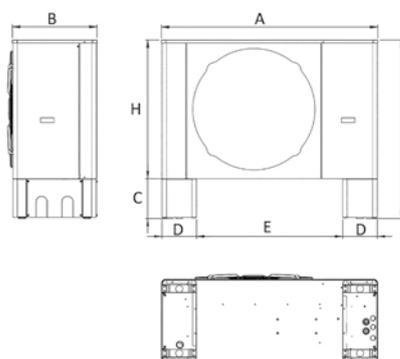

TECHNICAL DATA				10			15				
ODU Sherpa Cold				02269			02273				
IDU Sherpa Cold				02276			02277				
Compressor frequency				Minimum	Nominal	Maximum	Minimum	Nominal	Maximum		
PUNCTUAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	3.90	9.60	-	5.51	14.40	-	
	COP	a7/6 - w30/35	(a)	W/W	-	4.27	-	-	4.68	-	
	Heating power	a2/1 - w30/35	(b)	kW	4.80	9.60	-	6.82	14.40	-	
	COP	a2/1 - w30/35	(b)	W/W	-	3.83	-	-	3.85	-	
	Heating power	a-7/-8 - w30/35	(c)	kW	4.17	9.60	-	6.26	14.40	-	
	COP	a-7/-8 - w30/35	(c)	W/W	-	2.98	-	-	2.98	-	
	Heating power	a-15/-16 - w30/35	(d)	kW	3.72	8.93	-	5.52	13.25	-	
	COP	a-15/-16 - w30/35	(d)	W/W	-	2.26	-	-	2.57	-	
	Heating power	a-20/-19 - w30/35	(r)	kW	3.28	7.87	-	4.88	11.71	-	
	COP	a-20/-19 - w30/35	(r)	W/W	-	2.09	-	-	2.43	-	
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	3.90	9.60	-	5.51	14.40	-	
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	3.33	-	-	3.53	-	
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	4.80	9.60	-	6.82	14.40	-	
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	2.82	-	-	3.08	-	
	Heating power (fancoils)	a-7/-8 - w40/45	(h)	kW	4.17	9.60	-	6.26	14.40	-	
	COP (fancoils)	a-7/-8 - w40/45	(h)	W/W	-	2.33	-	-	2.45	-	
	Heating power (fancoils)	a-15/-16 - w40/45	(i)	kW	3.68	8.83	-	5.36	12.86	-	
	COP (fancoils)	a-15/-16 - w40/45	(i)	W/W	-	1.90	-	-	2.03	-	
	Heating power (fancoils)	a-20/-19 - w40/45	(s)	W/W	3.17	7.61	-	4.80	11.52	-	
	COP (fancoils)	a-20/-19 - w40/45	(s)	W/W	-	1.76	-	-	1.92	-	
	Cooling power	a35 - w23/18	(l)	kW	3.53	8.40	-	4.08	11.31	-	
	EER	a35 - w23/18	(l)	W/W	-	4.26	-	-	4.45	-	
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	2.71	6.44	-	3.13	8.67	-	
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	3.31	-	-	3.45	-	
	EFFICIENCIES	Energy efficiency class in water heating 35°C	Warmer Climate			A+++			A+++		
		SCOP	Warmer Climate			4.62			4.79		
		s (Seasonal efficiency for space heating)	Warmer Climate	ηs %		181.8			188.6		
		Energy efficiency class in water heating 35°C	Average Climate			A+++			A+++		
SCOP		Average Climate			4.50			4.60			
s (Seasonal efficiency for space heating)		Average Climate	ηs %		177.3			181.1			
Energy efficiency class in water heating 35°C		Cold Climate			A+			A+			
SCOP		Cold Climate			3.60			3.71			
s (Seasonal efficiency for space heating)		Cold Climate	ηs %		141.1			145.3			
Energy efficiency class in water heating 55°C		Warmer Climate			A++			A++			
SCOP		Warmer Climate			3.27			3.45			
s (Seasonal efficiency for space heating)		Warmer Climate	ηs %		127.8			135.1			
Energy efficiency class in water heating 55°C		Average Climate			A+++			A+++			
SCOP		Average Climate			3.23			3.37			
s (Seasonal efficiency for space heating)		Average Climate	ηs %		126.3			131.9			
Energy efficiency class in water heating 55°C		Cold Climate			A+			A+			
SCOP		Cold Climate			2.68			2.76			
s (Seasonal efficiency for space heating)		Cold Climate	ηs %		104.2			107.3			
NOISE LEVEL		Indoor unit sound power			dB(A)	36			36		
		Indoor unit sound pressure		(n)	dB(A)	30			30		
		Outdoor unit sound power (nominal)			dB(A)	53.4			52.9		
		Outdoor unit sound pressure (nominal)		(o)	dB(A)	33.5			33		
		System circulator absorption			W	75			75		
		Supply voltage indoor unit			V/ph/Hz	230/1/50			230/1/50		
		Maximum absorbed current of the internal unit			A	0.33			0.33		
ELECTRICAL DATA		Maximum power consumption of the internal unit			kW	0.75			0.75		
		Additional electric heating elements			kW	-			-		
		Supply voltage outdoor unit			V/ph/Hz	230/1/50			230/1/50		
	Outdoor unit maximum absorbed current			A	24.6			38.7			
	Outdoor unit maximum absorbed power			kW	5.1			8.0			
	Compressor type				Scroll with injection			Scroll with injection			
	Refrigerant inlet connection diameter			"	See installation manual			See installation manual			
COOLING CIRCUIT	Coolant gas		(p)		R410A			R410A			
	Global warming potential			GWP	2088			2088			
	Refrigerant gas charge			kg	5			6.5			
	Refrigerant piping length limit without minimum surface verification		(q)		-			-			
	Hydraulic connections			"	1"			1"			
	Capacity of expansion vessel			l	-			-			
	HYDRAULIC DATA										

(a) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 30°C/35°C
(b) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 30°C/35°C
(c) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 30°C/35°C
(d) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 30°C/35°C
(e) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 40°C/45°C
(f) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 40°C/45°C
(g) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
(h) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C
(i) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
(j) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C
(k) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 23°C/18°C

(m) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 12°C/7°C
(n) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
(o) Sound pressure values measured at a distance of 4 m in free field distance
(p) Non-airtightly sealed equipment containing fluorinated GAS
(q) maximum length of the refrigeration pipes beyond which checks are necessary on the minimum surface of the installation rooms, check the technical manual
(r) Heating mode, external air temperature -20°C b.s./-19°C b.u., inlet/outlet water temperature 30°C/35°C
(s) Heating mode, external air temperature -20°C b.s./-19°C b.u., inlet/outlet water temperature 40°C/45°C

TECHNICAL DATA				15 T			18 T				
ODU Sherpa Cold				02274			02275				
IDU Sherpa Cold				02277			02278				
Compressor frequency				Minimum	Nominal	Maximum	Minimum	Nominal	Maximum		
PUNCTUAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	5.51	14.40	-	6.24	17.28	-	
	COP	a7/6 - w30/35	(a)	W/W	-	4.68	-	-	4.34	-	
	Heating power	a2/1 - w30/35	(b)	kW	6.82	14.40	-	7.78	17.28	-	
	COP	a2/1 - w30/35	(b)	W/W	-	3.85	-	-	3.37	-	
	Heating power	a-7/8 - w30/35	(c)	kW	6.26	14.40	-	7.20	17.28	-	
	COP	a-7/8 - w30/35	(c)	W/W	-	2.98	-	-	2.61	-	
	Heating power	a-15/16 - w30/35	(d)	kW	5.52	13.25	-	6.40	15.36	-	
	COP	a-15/16 - w30/35	(d)	W/W	-	2.57	-	-	2.23	-	
	Heating power	a-20/19 - w30/35	(r)	kW	4.88	11.71	-	5.60	13.44	-	
	COP	a-20/19 - w30/35	(r)	W/W	-	2.43	-	-	2.03	-	
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	5.51	14.40	-	6.24	17.28	-	
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	3.53	-	-	3.05	-	
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	6.82	14.40	-	7.78	17.28	-	
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	3.08	-	-	2.80	-	
	Heating power (fancoils)	a-7/8 - w40/45	(h)	kW	6.26	14.40	-	7.20	17.28	-	
	COP (fancoils)	a-7/8 - w40/45	(h)	W/W	-	2.45	-	-	2.20	-	
	Heating power (fancoils)	a-15/16 - w40/45	(i)	kW	5.36	12.86	-	5.80	13.92	-	
	COP (fancoils)	a-15/16 - w40/45	(i)	W/W	-	2.03	-	-	1.90	-	
	Heating power (fancoils)	a-20/19 - w40/45	(s)	W/W	4.80	11.52	-	5.20	12.48	-	
	COP (fancoils)	a-20/19 - w40/45	(s)	W/W	-	1.92	-	-	1.79	-	
	Cooling power	a35 - w23/18	(l)	kW	4.08	11.31	-	6.62	15.72	-	
	EER	a35 - w23/18	(l)	W/W	-	4.45	-	-	4.11	-	
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	3.13	8.67	-	5.08	12.34	-	
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	3.45	-	-	2.99	-	
	EFFICIENCIES	Energy efficiency class in water heating 35°C	Warmer Climate			A+++			A+++		
		SCOP	Warmer Climate			4.79			4.66		
		s (Seasonal efficiency for space heating)	Warmer Climate	ηs %		188.6			183.7		
		Energy efficiency class in water heating 35°C	Average Climate			A+++			A+++		
		SCOP	Average Climate			4.60			4.45		
		s (Seasonal efficiency for space heating)	Average Climate	ηs %		181.1			175		
		Energy efficiency class in water heating 35°C	Cold Climate			A+			A+		
		SCOP	Cold Climate			3.71			3.44		
		s (Seasonal efficiency for space heating)	Cold Climate	ηs %		145.3			134.6		
Energy efficiency class in water heating 55°C		Warmer Climate			A++			A+			
SCOP		Warmer Climate			3.45			3.19			
s (Seasonal efficiency for space heating)		Warmer Climate	ηs %		135.1			124.7			
Energy efficiency class in water heating 55°C		Average Climate			A+++			A+			
SCOP		Average Climate			3.37			3.13			
s (Seasonal efficiency for space heating)		Average Climate	ηs %		131.9			122.2			
Energy efficiency class in water heating 55°C		Cold Climate			A+			A			
SCOP		Cold Climate			2.76			2.51			
s (Seasonal efficiency for space heating)		Cold Climate	ηs %		107.3			97.4			
NOISE LEVEL		Indoor unit sound power			dB(A)	36			37		
		Indoor unit sound pressure	(n)		dB(A)	30			31		
		Outdoor unit sound power (nominal)			dB(A)	52.9			54		
		Outdoor unit sound pressure (nominal)	(o)		dB(A)	33			34		
		System circulator absorption			W	75			85		
		ELECTRICAL DATA	Supply voltage indoor unit			V/ph/Hz	230/1/50			230/1/50	
	Maximum absorbed current of the internal unit with active heating elements				A	0.33			0.33		
	Internal unit maximum power consumption with active heating elements				kW	0.75			0.75		
	Additional electric heating elements				kW	-			-		
	Supply voltage outdoor unit				V/ph/Hz	400/3/50			400/3/50		
Outdoor unit maximum absorbed current				A	12.8			13.6			
Outdoor unit maximum absorbed power			kW	8.0			8.5				
COOLING CIRCUIT	Compressor type				Scroll with injection			Scroll with injection			
	Refrigerant inlet connection diameter			"	See installation manual			See installation manual			
	Coolant gas	(p)			R410A			R410A			
	Global warming potential			GWP	2088			2088			
	Refrigerant gas charge			kg	6.5			6.5			
	Refrigerant piping length limit without minimum surface verification	(q)			-			-			
HYDRAULIC DATA	Hydraulic connections			"	T			T			
	Capacity of expansion vessel			l	-			-			

ACCESSORIES

ACCESSORIES	DESCRIPTION	STATUS	
B0900	Cable for Modbus connection touch panel 100m	▼	
B0899	Metallic frame for touch panel external installation	○	
B0906	Aesthetic fan cover front grille	10	
B0907	Aesthetic fan cover front grille	≥ 15	
B0915	Brass Y filter	○	
STORAGE TANKS / PUFFER	01804	HE 200 L storage tank	10
	01805	HE 300 L storage tank	○
	01806	HES 300 L solar storage tank	≤ 15T
	01200	Thermal accumulation 100 L	10
	B0618	Resistance for boiler 2 kW	○
	B0666	Resistance for boiler 3 kW	○
	B0617	Resistance flange kit	○

● Standard accessory | ○ Optional accessory | ▼ Required accessory | – Accessory not compatible

Accessory description on page 54

Please note that optional accessories are available for purchase with all models of the heat pump. When compatibility is only possible with certain sizes, the information is shown in the table. Standard accessories are already included in the heat pump code.

SHERPA MONOBLOC

S2



Compatible with:
SIOS
CONTROL

Monobloc heat pump



COMPACT TECHNOLOGY

Compact unit and reduced dimensions. For all power sizes the machine is equipped with a single fan unit.



DOMESTIC HOT WATER UP TO 60°C

Sherpa supplies Domestic Hot Water with temperatures up to 60°C.



INTEGRATED WI-FI

By downloading the Comfort Home app you can manage all its features from your smartphone, even when away from home.




FEATURES

- **Air-water heat pump inverter with R32 refrigerant**
- **Energy efficiency class** in heating moderate climate: A+++ (35°C) e A++ (55°C)
- **Power available:** 9 versions with R32 refrigerant single-phase (6-8-10-12-14-16 kW) three-phase power supplies (12-14-16 kW)
- **DHW production:** up to 60°C
- **Compressor:** twin rotary DC.
- **Expansion valve:** electronic.
- **Fan** with brushless DC motor.
- **Standard supply remote touchscreen control panel** (connection cable up to 50 m not included). Integrated Wi-Fi module for controlling the machine via smartphone and table, with relevant app (Comfort Home)
- **Refrigerant gas:** R32*
- **Operating limits:** up to -25°C, +43°C (see technical manuals for details)
- **External air probe** integrated in the machine.
- **Domestic Hot Water storage tank probe:** standard supply with the machine.
- **Cascade management:** up to 6 units can be connected (of the same size), 1 Master and 5 Slaves (only the Master unit can produce domestic hot water).
- **Smart Grid:** the heat pump is prepared to dialogue with a smart electric grid and is SG Ready certified, according to the requirements of the German BWP Institute.

* Equipment hermetically sealed containing fluorinated gases with an equivalent GWP of 675 (R32)



LAYOUT, DIMENSIONS, WEIGHT

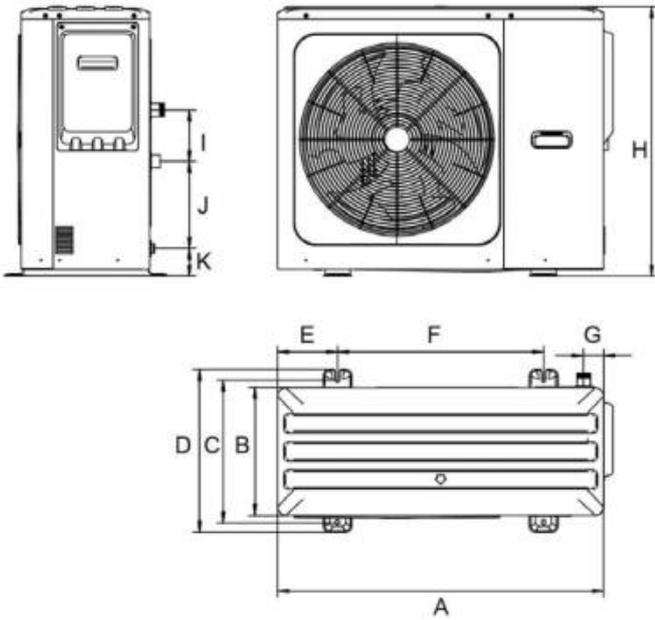

		6	8	10	12	14	16	12T	14T	16T
MONOFAN										
A	mm	1040	1040	1040	1040	1040	1040	1040	1040	1040
B	mm	410	410	410	410	410	410	410	410	410
C	mm	458	458	458	458	458	458	458	458	458
D	mm	523	523	523	523	523	523	523	523	523
E	mm	191	191	191	191	191	191	191	191	191
F	mm	656	656	656	656	656	656	656	656	656
G	mm	64	64	64	64	64	64	64	64	64
H	mm	865	865	865	865	865	865	865	865	865
I	mm	165	165	165	165	165	165	165	165	165
J	mm	279	279	279	279	279	279	279	279	279
K	mm	89	89	89	89	89	89	89	89	89
Weight	kg	87	87	87	106	106	106	120	120	120

CASCADING

Cascading of up to 6 units. System power up to 96 kW.



REMOTE CONTROL VIA APP COMFORT HOME

The heat pump can be controlled remotely with Tablet and Smartphone thanks to the standard Wi-Fi module (to be interfaced with a wireless router connected to the Internet). The "Comfort Home" App can be downloaded free of charge from the Google and Apple Stores, which allows control of the machine via the Cloud.



TECHNICAL DATA				6		8		10		12		14		16									
Sherpa Monobloc S2 E				02303		02304		02305		02306		02307		02308									
Compressor frequency				Min	Nom	Max	Min	Nom	Max	Min	Nom	Max	Min	Nom	Max								
FUNCTIONAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	-	6,5	8,47	-	8,4	9,56	-	10	11,16	-	12,2	13,42	-	14,1	15,27	-	16	18,23	
	COP	a7/6 - w30/35	(a)	W/W	-	5,3	-	-	5,05	-	-	4,7	-	-	4,9	-	-	4,7	-	-	4,5	-	
	Heating power	a2/1 - w30/35	(b)	kW	-	5,6	7,64	-	7,1	8,52	-	8,2	9,94	-	12,3	12,3	-	13	13,56	-	14,5	14,76	
	COP	a2/1 - w30/35	(b)	W/W	-	4,2	-	-	3,95	-	-	3,8	-	-	3,6	-	-	3,5	-	-	3,25	-	
	Heating power	a-7/-8 - w30/35	(c)	kW	-	6,2	6,67	-	7,1	7,65	-	8	8,4	-	11,6	12,1	-	12,5	13,2	-	13,5	14,1	
	COP	a-7/-8 - w30/35	(c)	W/W	-	3,2	-	-	3,15	-	-	3	-	-	2,85	-	-	2,8	-	-	2,7	-	
	Heating power	a-15/-16 - w30/35	(d)	kW	-	5,59	5,59	-	6,07	6,07	-	6,48	6,48	-	10,35	10,35	-	11,22	11,22	-	11,82	11,82	
	COP	a-15/-16 - w30/35	(d)	W/W	-	2,58	-	-	2,54	-	-	2,5	-	-	2,39	-	-	2,35	-	-	2,22	-	
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	-	6,6	8,14	-	8,5	9,28	-	10,2	10,87	-	12,5	13,14	-	14,5	14,87	-	16,2	18,07	
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	4	-	-	3,8	-	-	3,65	-	-	3,7	-	-	3,55	-	-	3,45	-	
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	-	6,5	7,03	-	7,5	8,22	-	8,5	9,42	-	12	12	-	13	13,28	-	14,3	14,74	
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	3,15	-	-	3,05	-	-	2,95	-	-	2,9	-	-	2,8	-	-	2,7	-	
	Heating power (fancoils)	a-7/-8 - w40/45	(h)	kW	-	6,1	6,47	-	6,8	7,43	-	7,4	8,16	-	11,5	11,5	-	12,5	12,5	-	13,5	13,5	
	COP (fancoils)	a-7/-8 - w40/45	(h)	W/W	-	2,6	-	-	2,5	-	-	2,4	-	-	2,4	-	-	2,3	-	-	2,25	-	
	Heating power (fancoils)	a-15/-16 - w40/45	(i)	kW	-	5,45	5,45	-	5,92	5,92	-	6,33	6,33	-	9,62	9,62	-	10,3	10,3	-	10,96	10,96	
	COP (fancoils)	a-15/-16 - w40/45	(i)	W/W	-	2,23	-	-	2,2	-	-	2,14	-	-	2,11	-	-	2,07	-	-	1,98	-	
	Cooling power	a35 - w23/18	(l)	kW	-	6,5	9,27	-	8,3	10,31	-	10	10,31	-	12,2	16,11	-	13,9	17,13	-	15,4	17,13	
	EER	a35 - w23/18	(l)	W/W	-	5,1	-	-	4,85	-	-	4,3	-	-	4,6	-	-	4,4	-	-	4,2	-	
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	-	5,5	6,84	-	7,4	8,66	-	9	9	-	11,6	13,44	-	13,4	15,48	-	14	16,01	
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	3,25	-	-	3,15	-	-	2,9	-	-	3,1	-	-	2,93	-	-	2,9	-	
	EFFICIENCIES	Energy efficiency class in water heating 35°C	Warmer Climate			A+++		A+++		A+++		A+++		A+++		A+++		A+++		A+++		A+++	
		SCOP	Warmer Climate			6,78			6,94			7,05			6,63			6,59			6,46		
		s (Seasonal efficiency for space heating)	Warmer Climate	ηs %		268,2			274,7			279,1			262,3			260,5			255,4		
		Energy efficiency class in water heating 35°C	Average Climate			A+++		A+++		A+++		A+++		A+++		A+++		A+++		A+++		A+++	
SCOP		Average Climate			5,12			5,17			5,12			5,08			4,89			4,84			
s (Seasonal efficiency for space heating)		Average Climate	ηs %		201,8			204			201,9			200,1			192,5			190,5			
Energy efficiency class in water heating 35°C		Cold Climate			A+++		A+++		A+++		A+++		A+++		A+++		A+++		A+++		A+++		
SCOP		Cold Climate			4,41			4,44			4,44			4,3			4,36			4,35			
s (Seasonal efficiency for space heating)		Cold Climate	ηs %		173,4			174,6			174,6			168,8			171,3			170,9			
Energy efficiency class in water heating 55°C		Warmer Climate			A++		A++		A++		A++		A++		A++		A++		A++		A++		
SCOP		Warmer Climate			4,35			4,71			4,91			4,55			4,69			4,68			
s (Seasonal efficiency for space heating)		Warmer Climate	ηs %		170,9			185,3			193,4			179			184,6			184			
Energy efficiency class in water heating 55°C		Average Climate			A++		A++		A++		A++		A++		A++		A++		A++		A++		
SCOP		Average Climate			3,59			3,67			3,71			3,62			3,62			3,59			
s (Seasonal efficiency for space heating)		Average Climate	ηs %		140,7			143,6			145,5			141,6			141,8			140,6			
Energy efficiency class in water heating 55°C		Cold Climate			A++		A++		A++		A++		A++		A++		A++		A++		A++		
SCOP		Cold Climate			2,9			3,02			3,14			3,23			3,24			3,18			
s (Seasonal efficiency for space heating)		Cold Climate	ηs %		113,1			117,7			122,4			126			126,6			124,3			
NOISE LEVEL		Indoor unit sound power				dB(A)		-		-		-		-		-		-		-		-	
		Indoor unit sound pressure	(n)			dB(A)		-		-		-		-		-		-		-		-	
		Outdoor unit sound power (nominal)				dB(A)		60		63		65		70		72		72		72		72	
		Outdoor unit sound pressure (nominal)	(o)			dB(A)		48		51		53		56		58		58		58		58	
		System circulator absorption				W	4-95			4-95			4-95			4-95			4-95			4-95	
		Supply voltage indoor unit				V/ph/Hz	-			-			-			-			-			-	
	Maximum absorbed current of the internal unit with active heating elements				A	-			-			-			-			-			-		
	Internal unit maximum power consumption with active heating elements				kW	-			-			-			-			-			-		
	Additional electric heating elements				kW	-			-			-			-			-			-		
	Supply voltage outdoor unit				V/ph/Hz	220-240/1/50			220-240/1/50			220-240/1/50			220-240/1/50			220-240/1/50			220-240/1/50		
ELECTRICAL DATA	Outdoor unit maximum absorbed current				A	13			14,5			16			25			26,5			28		
	Outdoor unit maximum absorbed power				kW	3,2			3,5			3,8			5,8			6,2			6,6		
	Compressor type					TWIN ROTARY			TWIN ROTARY			TWIN ROTARY			TWIN ROTARY			TWIN ROTARY			TWIN ROTARY		
	Refrigerant inlet connection diameter				"	-			-			-			-			-			-		
	Coolant gas	(p)				R32			R32			R32			R32			R32			R32		
	Global warming potential				GWP	675			675			675			675			675			675		
	Refrigerant gas charge				kg	1,25			1,25			1,25			1,8			1,8			1,8		
	Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018	(q)				-			-			-			-			-			-		
	Hydraulic connections				"	G1 BSP			G1 BSP			G1 BSP			G5/4 BSP			G5/4 BSP			G5/4 BSP		
	Capacity of expansion vessel				l	5			5			5			5			5			5		
HYDRAULIC DATA					6		8		10		12		14		16								

(a) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 30°C/35°C
(b) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 30°C/35°C
(c) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 30°C/35°C
(d) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 30°C/35°C
(f) Heating mode, external air temperature 7°C b.s./6°C b.u., inlet/outlet water temperature 40°C/45°C
(g) Heating mode, external air temperature 2°C b.s./1°C b.u., inlet/outlet water temperature 40°C/45°C
(h) Heating mode, external air temperature -7°C b.s./-8°C b.u., inlet/outlet water temperature 40°C/45°C
(i) Heating mode, external air temperature -15°C b.s./-16°C b.u., inlet/outlet water temperature 40°C/45°C
(l) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 23°C/18°C

(m) Cooling mode, external air temperature 35°C, inlet/outlet water temperature 12°C/7°C
(n) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
(o) Sound pressure values measured at a distance of 1 m in a semi-anechoic chamber
(p) Airtightlly sealed equipment containing fluorinated GAS
(q) maximum length of the refrigeration pipes beyond which checks on the minimum surface of the installation rooms are necessary, check the technical manual

TECHNICAL DATA				12T			14T			16T					
Sherpa Monobloc S2 E				02309			02310			02311					
Compressor frequency				Min	Nom	Max	Min	Nom	Max	Min	Nom	Max			
PUNCTUAL PERFORMANCE	Heating power	a7/6 - w30/35	(a)	kW	-	12,2	13,42	-	14,1	15,27	-	16	18,23		
	COP	a7/6 - w30/35	(a)	W/W	-	4,9	-	-	4,7	-	-	4,5	-		
	Heating power	a2/1 - w30/35	(b)	kW	-	12,3	12,3	-	13	13,56	-	14,5	14,76		
	COP	a2/1 - w30/35	(b)	W/W	-	3,6	-	-	3,5	-	-	3,25	-		
	Heating power	a-7/-8 - w30/35	(c)	kW	-	11,6	12,1	-	12,5	13,2	-	13,5	14,1		
	COP	a-7/-8 - w30/35	(c)	W/W	-	2,85	-	-	2,8	-	-	2,7	-		
	Heating power	a-15/-16 - w30/35	(d)	kW	-	10,35	10,35	-	11,22	11,22	-	11,82	11,82		
	COP	a-15/-16 - w30/35	(d)	W/W	-	2,39	-	-	2,35	-	-	2,22	-		
	Heating power (fancoils)	a7/6 - w40/45	(f)	kW	-	12,5	13,14	-	14,5	14,87	-	16,2	18,07		
	COP (fancoils)	a7/6 - w40/45	(f)	W/W	-	3,7	-	-	3,55	-	-	3,45	-		
	Heating power (fancoils)	a2/1 - w40/45	(g)	kW	-	12	12	-	13	13,28	-	14,3	14,74		
	COP (fancoils)	a2/1 - w40/45	(g)	W/W	-	2,9	-	-	2,8	-	-	2,7	-		
	Heating power (fancoils)	a-7/-8 - w40/45	(h)	kW	-	11,5	11,5	-	12,5	12,5	-	13,5	13,5		
	COP (fancoils)	a-7/-8 - w40/45	(h)	W/W	-	2,4	-	-	2,3	-	-	2,25	-		
	Heating power (fancoils)	a-15/-16 - w40/45	(i)	kW	-	9,62	9,62	-	10,3	10,3	-	10,96	10,96		
	COP (fancoils)	a-15/-16 - w40/45	(i)	W/W	-	2,11	-	-	2,07	-	-	1,98	-		
	Cooling power	a35 - w23/18	(l)	kW	-	12,2	16,11	-	13,9	17,13	-	15,4	17,13		
	EER	a35 - w23/18	(l)	W/W	-	4,6	-	-	4,4	-	-	4,2	-		
	Cooling power (fancoils)	a35 - w12/7	(m)	kW	-	11,6	13,44	-	13,4	15,48	-	14	16,01		
	EER (fancoils)	a35 - w12/7	(m)	W/W	-	3,1	-	-	2,93	-	-	2,9	-		
	EFFICIENCIES	Energy efficiency class in water heating 35°C	Warmer Climate			A+++			A+++			A+++			
		SCOP	Warmer Climate			6,64			6,59			6,46			
		s (Seasonal efficiency for space heating)	Warmer Climate	ηs %		262,5			260,6			255,5			
		Energy efficiency class in water heating 35°C	Average Climate			A+++			A+++			A+++			
SCOP		Average Climate			5,08			4,89			4,84				
s (Seasonal efficiency for space heating)		Average Climate	ηs %		200,2			192,5			190,5				
Energy efficiency class in water heating 35°C		Cold Climate			A+++			A+++			A+++				
SCOP		Cold Climate			4,3			4,36			4,35				
s (Seasonal efficiency for space heating)		Cold Climate	ηs %		168,8			171,3			170,9				
Energy efficiency class in water heating 55°C		Warmer Climate			A++			A++			A++				
SCOP		Warmer Climate			4,55			4,69			4,68				
s (Seasonal efficiency for space heating)		Warmer Climate	ηs %		179			184,6			184				
Energy efficiency class in water heating 55°C		Average Climate			A++			A++			A++				
SCOP		Average Climate			3,62			3,62			3,59				
s (Seasonal efficiency for space heating)		Average Climate	ηs %		141,6			141,8			140,7				
Energy efficiency class in water heating 55°C		Cold Climate			A++			A++			A++				
SCOP		Cold Climate			3,23			3,24			3,18				
s (Seasonal efficiency for space heating)		Cold Climate	ηs %		126			126,6			124,3				
NOISE LEVEL		Indoor unit sound power				dB(A)			-			-			
		Indoor unit sound pressure	(n)			dB(A)			-			-			
		Outdoor unit sound power (nominal)				dB(A)			70			72			
		Outdoor unit sound pressure (nominal)	(o)			dB(A)			57			59			
		System circulator absorption					W			4-95			4-95		
		Supply voltage indoor unit					V/ph/Hz			-			-		
	Maximum absorbed current of the internal unit with active heating elements					A			-			-			
	Internal unit maximum power consumption with active heating elements					kW			-			-			
	Additional electric heating elements					kW			-			-			
	Supply voltage outdoor unit					V/ph/Hz			380-415/3/50			380-415/3/50			
	Outdoor unit maximum absorbed current					A			9,5			10,5			
	Outdoor unit maximum absorbed power					kW			5,8			6,2			
COOLING CIRCUIT	Compressor type				TWIN ROTARY			TWIN ROTARY			TWIN ROTARY				
	Refrigerant inlet connection diameter				"			-			-				
	Coolant gas	(p)			R32			R32			R32				
	Global warming potential					GWP			675			675			
	Refrigerant gas charge					kg			1,8			1,8			
	Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018	(q)				-			-			-			
	Hydraulic connections					"			G5/4 BSP			G5/4 BSP			
	Capacity of expansion vessel					l			5			5			
ELECTRICAL DATA	Supply voltage indoor unit				V/ph/Hz			-			-				
	Maximum absorbed current of the internal unit with active heating elements					A			-			-			
	Internal unit maximum power consumption with active heating elements					kW			-			-			
	Additional electric heating elements					kW			-			-			
	Supply voltage outdoor unit					V/ph/Hz			380-415/3/50			380-415/3/50			
	Outdoor unit maximum absorbed current					A			9,5			10,5			
	Outdoor unit maximum absorbed power					kW			5,8			6,2			
	Compressor type					TWIN ROTARY			TWIN ROTARY			TWIN ROTARY			
	Refrigerant inlet connection diameter					"			-			-			
	Coolant gas	(p)				R32			R32			R32			
	Global warming potential					GWP			675			675			
	Refrigerant gas charge					kg			1,8			1,8			
Refrigerant piping length limit without minimum surface check according to IEC 60335-2-40:2018	(q)				-			-			-				
Hydraulic connections					"			G5/4 BSP			G5/4 BSP				
Capacity of expansion vessel					l			5			5				

ACCESSORIES

STORAGE TANKS / PUFFER	B0916	Kit 3-way valve for DHW		○
	01804	HE 200 L storage tank		○
	01805	HE 300 L storage tank		○
	01806	HES 300 L solar storage tank		○
	01807	Hybride boiler HY 300 L		○
	01808	HYS 300 L solar hybrid storage tank		○
	B0618	Resistance for boiler 2 kW		○
	B0666	Resistance for boiler 3 kW		○
	B0617	Resistance flange kit		○
	01199	Thermal accumulation 50 L		○
	01200	Thermal accumulation 100 L		○

○ Optional accessory | ● Standard accessory | — Accessory not compatible

Accessory description on page 54

Please note that optional accessories are available for purchase with all models of the heat pump. When compatibility is only possible with certain sizes, the information is shown in the table. Standard accessories are already included in the heat pump code.

SHERPA SHW S2

Water heater in heat pump



HIGH EFFICIENCY

Sherpa SHW S2 achieves the highest energy class in its category (according to the ErP regulation).



PHOTOVOLTAIC INTEGRATION

Contact for integration with photovoltaic plant, which forces switch-on and raises the machine set-point. The energy produced by the photovoltaic system is stored to lower the DHW production costs and maximise the energy saving.



SOLAR MANAGEMENT

Solar thermal compatible: the unit can work with a second energy source such as solar panels (solar circulator management). Valid only for model 360S.




FEATURES

- **Available in two versions:** standard model with heat pump, electric heating element and 202-litre tank (Sherpa SHW S2 200); model with coil for solar panels or other energy sources, electric heating element and 251-litre tank (Sherpa SHW S2 260S).
- **COP > 2,6* DHW at 65°C (75°C with electric heating element)**
- **Energy class:** A+
- **Working range** with heat pump and air temperature from -10°C to 43°C.
- **Enamelled** steel tank.
- **Anti-corrosion magnesium anode** to ensure tank durability.
- **Condenser wound outside** the boiler free from deposits and gas-water contamination.
- **Rigid polyurethane** foam (PU) thermal insulation, thickness 50mm.
- **External plastic cladding.** Soundproof plastic top cover.
- **High-efficiency compressor** with R134a refrigerant**.
- **Electric heating element** available in the unit as back-up which ensures hot water at a constant temperature even in extreme winter or summer conditions.
- **ON-OFF contact** to start the unit via an external switch.
- **Weekly sanitisation cycle.**
- **Option to manage the** domestic hot water recirculation or solar heating integration. Valid only for model 260S
- **Electronic expansion valve** for a timely check.

* Ambient air temperature 7°C b.s./6°C b.u., water temperature from 10°C to 55°C (EN 16147).

** hermetically sealed equipment containing fluorinated gas with GWP equivalent 1430.



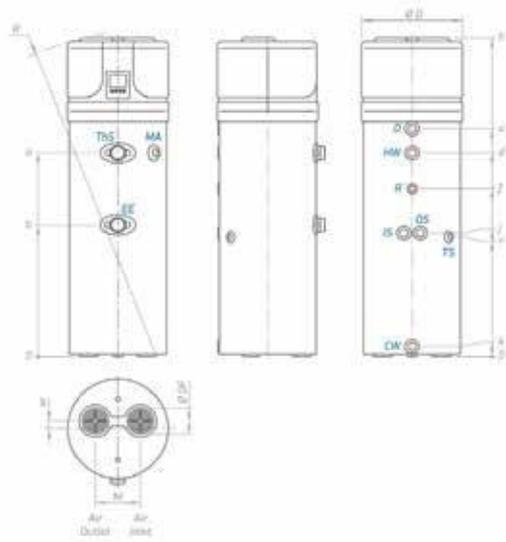

		200	260S
h	mm	1720	2010
a	mm	994	1285
b	mm	724	834
d	mm	995	1285
f	mm	803	1064
i	mm	-	781
k	mm	60	60
n	mm	-	766
u	mm	1153	1440
w	mm	58	58
M	mm	260	260
ØDF	mm	160	160
R	mm	1785	2055
ØD	mm	630	630

- CW - Cold water inlet G 1"
- HW - Hot water outlet G 1"
- IS - Heat exchanger inlet G 1"
- OS - Heat exchanger outlet G 1"
- R - Recirculation G 3/4"
- TS - Temperature probe G 1/2"

- EE - Opening for electric heating element G 1 1/2"
- CD - Condensation drain G 3/4"
- 9. 1" Solar energy return
- 10. 1" domestic cold water inlet
- 11. Condensation drain Ø 16

TECHNICAL DATA	SHERPA SHW S2 200		SHERPA SHW S2 260S	
		02385		02386
Electrical power supply	W/Ph/Hz	220-240/1Ph+N/50	220-240/1Ph+N/50	220-240/1Ph+N/50
Actual tank capacity	L	202	251	251
Prated nominal heating power (EN 16147: 2017 - A7/W55)	W	1050	1200	1200
Maximum heating power (summer conditions)	W	2305	2305	2305
COPDHW (EN 16147: 2017 - A7/W55)	W/W	2.7	3	3
COPDHW (EN 16147: 2017 - A14/W55)	W/W	3.1	3.4	3.4
Maximum electrical absorption with active electric heating element	W	663+1500	663+1500	663+1500
Heating time (EN 16147: 2017 - A7/W55)	h:min	08:59	10:15	10:15
Heating time in BOOST mode (A7 - W10-55)	h:min	03:47	04:21	04:21
Intake air temperature range	°C	-10 ÷ 43	-10 ÷ 43	-10 ÷ 43
Refrigerant gas (a)		R134a	R134a	R134a
Refrigerant loading	g	880	880	880
Nominal air flow rate (98 Pa)	m3/h	315	315	315
Storage tank maximum operating pressure	bar	8	8	8
Auxiliary electric heating element	W	1500	1500	1500
Solar exchange coil surface	m²	-	1.2	1.2
Protection class		IPX4	IPX4	IPX4
Transportation weight	Kg	105	128	128
Sound pressure (EN 12102:2013)	dB(A)	53	53	53
Load Profile (EN 16147: 2017)		L	XL	XL
Energy efficiency class (average climate conditions)		A+	A+	A+
ηWH (average climate conditions - EU Regulation 812/2013)	%	118	124	124

(a) hermetically sealed equipment containing fluorinated gas with GWP equivalent 1430.

Heat pump accessories



Download
Additional
information on
these accessories

B0931 Remote control display kit 10 m

Remote control display kit 10 m



Compatible with:

	suspended	tower		suspended	tower
SHERPA AQUADUE	<input type="radio"/>	<input type="radio"/>	SHERPA	<input type="radio"/>	<input type="radio"/>

B0916 Kit 3-way valve for DHW

Compact size and two-point control.



Compatible with:

	suspended	tower		suspended	tower
SHERPA AQUADUE	<input checked="" type="radio"/>	<input checked="" type="radio"/>	SHERPA MONOBLOC	<input type="radio"/>	<input type="radio"/>
SHERPA	<input type="radio"/>	<input checked="" type="radio"/>			

B0917 Solar thermal probe kit

Additional probe that detects the temperature of the solar thermal pipes, inhibits the heat pump from producing DHW only with solar thermal under certain conditions.



Compatible with:

	suspended	tower
SHERPA	<input type="radio"/>	<input type="radio"/>

B0623 Outdoor air temperature probe kit

Shielded probe to measure the outdoor air temperature. It is necessary to allow activation of the electric heating element and climatic curves.



Compatible with:

	suspended	tower
SHERPA AQUADUE	<input checked="" type="radio"/>	<input checked="" type="radio"/>
SHERPA	<input type="radio"/>	<input type="radio"/>

B0624 Kit DHW storage tank sensor

Probe to measure and directly control the water temperature in the domestic hot water storage tank.



Compatible with:

	suspended	tower
SHERPA AQUADUE	<input checked="" type="radio"/>	<input checked="" type="radio"/>
SHERPA	<input type="radio"/>	<input checked="" type="radio"/>

● Standard accessory | ○ Optional accessory | ▼ Required accessory | — Accessory not compatible

Please note that optional accessories are available for purchase with all models of the heat pump. When compatibility is only possible with certain sizes, the information is shown in the table. Standard accessories are already included in the heat pump code.

B0918
Kit Sherpa Flex Box AS

Technical cabinet that makes it possible to create a compact system in heat pump with high installation flexibility.

Compatible with:	suspended	tower	suspended	tower
SHERPA AQUADUE	≤10	—	SHERPA	≤10 —


B0961
Kit Sherpa Flex Box AS RAL 9016

Technical cabinet that makes it possible to create a compact system in a heat pump with high installation flexibility. Painted in white RAL 9016 (front/back for upper, lower side and front panels, no backs).

Compatible with:	suspended	tower	suspended	tower
SHERPA AQUADUE	≤10	—	SHERPA	≤10 —


B1120
Sherpa Flex Box adapter kit

Accessory necessary for combining the Sherpa Flex Box AS Kit with the Sherpa S2/S3 heat pump (not Aquadue).

Compatible with:	suspended	tower
SHERPA	≤10	—


B0900
Cable for Modbus connection touch panel 100m

Length 100 m. Required accessory supplied separately.

Compatible with:
SHERPA COLD


B0899
Metallic frame for touch panel external installation

Compatible with:
SHERPA COLD


B0906
Aesthetic fan cover front grille

Compatible with:
SHERPA COLD


B0907
Aesthetic fan cover front grille

Compatible with:
SHERPA COLD


B0915
Brass Y filter

With 1" 1/4 couplers and 2" body

Compatible with:
SHERPA COLD


B0971
Thermostatic mixing valve kit for DHW

Assembly in the machine must be carried out by the installer

Compatible with:	suspended	tower
SHERPA	—	○


B0972
Expansion tank kit for DHW

Assembly in the machine must be carried out by the installer

Compatible with:	suspended	tower
SHERPA	—	○



Storage tanks / puffer

01804 HE 200 L storage tank

Compatible with:

suspended tower

SHERPA AQUADUE	○	—
SHERPA	○	—

SHERPA COLD	10
SHERPA MONOBLOC	○

01805 HE 300 L storage tank

Compatible with:

suspended tower

SHERPA AQUADUE	○	—
SHERPA	○	—

SHERPA COLD	○
SHERPA MONOBLOC	○

01806 HES 300 L solar storage tank

Compatible with:

suspended tower

SHERPA AQUADUE	○	—
SHERPA	○	—


SHERPA COLD	≤ 15T
SHERPA MONOBLOC	○



Storage tank with 1 or 2 coils with high exchange surface in carbon steel, complete with anodic protection, internal vitrification treatment according to DIN 4753-3 and UNI 10025 standards. Rigid polyurethane insulation thickness 70 mm. Coating colour Sky Blue RAL 5010.


TECHNICAL DATA		01804	01805	01806
Inhoud boiler HWW Nom.	l	200	300	300
Inhoud boiler HWW Effective	l	190	263	260
Total heigh	mm	1215	1615	1615
Diameter with insulation	mm	640	640	640
Insulation	mm	70	70	70
Energy class		B	B	B
Dispersion total	W	51	63	63
Dispersion temperature probe	W°K	1,13	1,40	1,40
Coil exchangers N°		1 double coil	1 double coil	1 double coil + 1 solar unit
Coil exchangers Surface Heat pump	m²	3	4	3,7
Coil exchangers Secondary surface	m²	-	-	1,2
Empty weight	kg	90	124	131

Dimensions		01804	01805	01806
A	mm	500	500	500
B	mm	995	1390	1470
C	mm	735	945	1035
D	mm	320	340	590
E	mm	140	140	315
F	mm	220	220	140
G	mm	370	395	220
H	mm	835	1165	495
I	mm	990	1310	650
J	mm	-	-	865
K	mm	1070	1390	1390
L	mm	1215	1615	1470
M	mm	-	-	1615

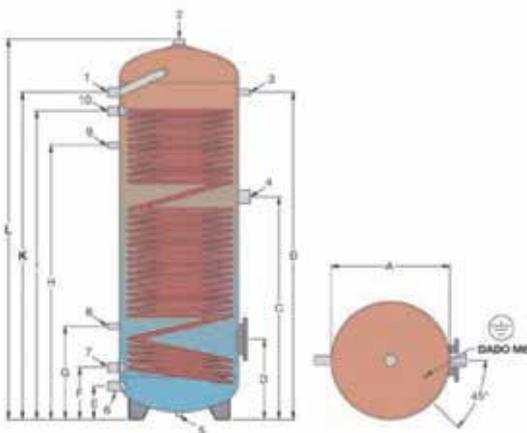

Storage tank 1 coil HE 200-300

- | | |
|---|------------------------|
| 1. Hot water flow 1" | 1/2" |
| 2. Anode 1" 1/4 | 6. Cold water inlet 1" |
| 3. Thermometer-Probe 1/2" | 7. Coil return 1" |
| 4. Electric heating element attachment 1" 1/2 | 8. Thermostat 1/2" |
| 5. Pallet attachment (blind) | 9. Recirculation 1/2" |
| | 10. Coil flow 1" |

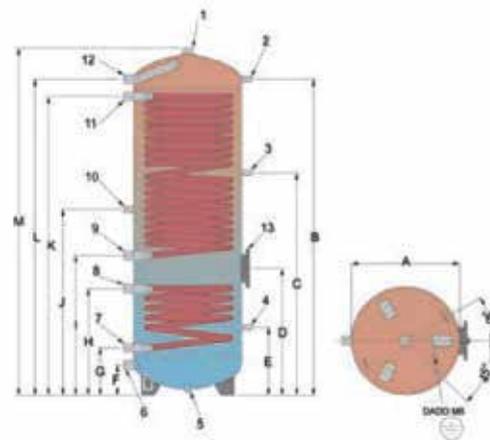

Storage tank 2 coils HES 300

- | | |
|-----------------------------------|--|
| 1. Anode 1" 1/4 | 8. Lower coil flow 1" |
| 2. Thermometer-Probe 1/2" | 9. Upper coil return 1" |
| 3. Thermostat 1/2" | 10. Recirculation 1/2" |
| 4. Thermostat 1/2" | 11. Upper coil flow 1" |
| 5. Pallet attachment (blind) 1/2" | 12. Hot water flow 1" |
| 6. Cold water inlet 1" | 13. Flange with electric heating element attachment 1" 1/2 |
| 7. Lower coil return 1" | |

○ Optional accessory | — Accessory not compatible

Please note that optional accessories are available for purchase with all models of the heat pump. When compatibility is only possible with certain sizes, the information is shown in the table. Standard accessories are already included in the heat pump code.

01807 Hybride boiler HY 300 L

Compatible with:

suspended tower

SHERPA AQUADUE	<input type="radio"/>	<input type="checkbox"/>
SHERPA	<input type="radio"/>	<input type="checkbox"/>

SHERPA MONOBLOC	<input type="radio"/>
-----------------	-----------------------



01808 HYS 300 L solar hybrid storage tank

Compatible with:

suspended tower


SHERPA AQUADUE	<input type="radio"/>	<input type="checkbox"/>
SHERPA	<input type="radio"/>	<input type="checkbox"/>

SHERPA MONOBLOC	<input type="radio"/>
-----------------	-----------------------

Combined heat storage tanks. Upper storage tank with 1 or 2 coils with high exchange surface in carbon steel, complete with anodic protection, internal vitrification treatment according to DIN 4753-3 and UNI 10025 standards. Lower storage tanks for heated or chilled water, internal untreated. Rigid polyurethane insulation thickness 70 mm. Coating colour Sky Blue RAL 5010.


TECHNICAL DATA		01807	01808
Inhoud boiler HWW Nom.	l	300	300
Inhoud boiler HWW Effective	l	270	270
Puffer Capacity	l	80	80
Total heigh	mm	1925	1925
Diameter with insulation	mm	690	690
Insulation	mm	70	70
Energy class		B	B
Dispersion total	W	73	73
Dispersion temperature probe	W/K	1,62	1,62
Coil exchangers N°		1	1 + 1 solar unit
Coil exchangers Surface Heat pump	m ²	3,3	2,8
Coil exchangers Secondary surface	m ²	-	0,9
Empty weight	kg	150	170

Dimensions		01807	01808
A	mm	550	550
B	mm	1755	1755
C	mm	1300	1420
D	mm	875	1035
E	mm	340	810
F	mm	160	340
G	mm	160	160
H	mm	340	160
I	mm	-	340
J	mm	675	-
K	mm	765	675
L	mm	940	755
M	mm	1425	945
N	mm	1675	1125
O	mm	1755	1280
P	mm	1925	1675
Q	mm	150	1755
R	mm	-	1925
S	mm	-	150

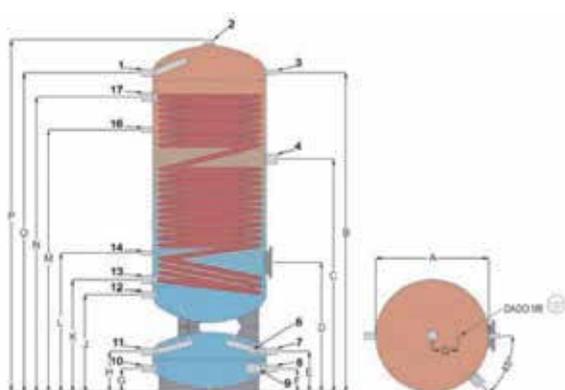

Storage tank 1 coil HY 300

- | | |
|---|----------------------------------|
| 1. Domestic hot water flow 1" | 12. Domestic cold water inlet 1" |
| 2. Anode 1" 1/4 | 13. Coil return 1" 1/4 |
| 3. Thermometer 1/2" | 14. Probe 1/2" |
| 4. Electric heating element attachment 1" 1/2 | 16. Recirculation 1/2" |
| 6. Probe 1/2" | 17. Upper coil flow 1" |
| 7. Boiler flow 1" | |
| 8. Boiler return 1" | |
| 9. Electric resistance 1" 1/2 | |
| 10. Heating system return 1" | |
| 11. System flow 1" | |

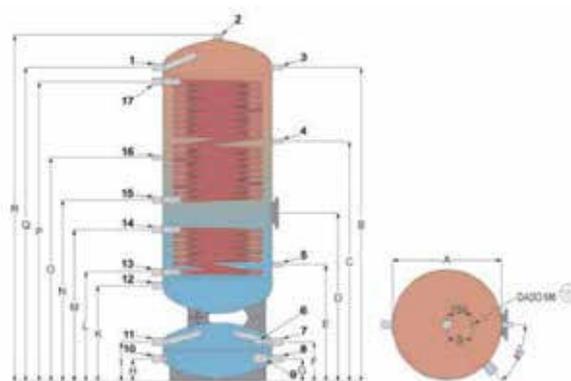

Storage tank 2 coils HYS 300

- | | |
|-------------------------------|----------------------------------|
| 1. Domestic hot water flow 1" | 11. System flow 1" |
| 2. Anode 1" 1/4 | 12. Domestic cold water inlet 1" |
| 3. Thermometer 1/2" | 13. Lower coil return 1" |
| 4. Probe 1/2" | 14. Lower coil flow 1" |
| 5. Probe 1/2" | 15. Upper coil return 1" |
| 6. Probe 1/2" | 16. Recirculation 1/2" |
| 7. Boiler flow 1" | 17. Upper coil flow 1" |
| 8. Boiler return 1" | |
| 9. Electric resistance 1" 1/2 | |
| 10. Heating system return 1" | |

01199 Thermal accumulation 50 L

Compatible with:

suspended tower

SHERPA	<input type="radio"/>	<input type="radio"/>
SHERPA AQUADUE	<input type="radio"/>	<input type="radio"/>

SHERPA MONOBLOC	<input type="radio"/>
-----------------	-----------------------



01200 Thermal accumulation 100 L

Compatible with:

suspended tower

SHERPA	<input type="radio"/>	<input type="radio"/>
SHERPA AQUADUE	<input type="radio"/>	<input type="radio"/>


SHERPA COLD	10
SHERPA MONOBLOC	<input type="radio"/>



Storage for chilled water, internal untreated. Can also be used for heating water. Polyurethane insulation 50 mm. Coating colour Sky Blue RAL 5010.

TECHNICAL DATA		01199	01200
Puffer Capacity	l	57	123
Total height	mm	935	1095
Diameter with insulation	mm	400	500
Insulation	mm	50	50
Energy class		B	B
Dispersion total	W	34	50
Dispersion temperature probe	W/°K	0,76	1,11
Empty weight	kg	25	35

Dimensions		01199	01200
A	mm	300	400
B	mm	100	100
C	mm	180	185
D	mm	485	560
E	mm	530	605
F	mm	785	935
G	mm	935	1095

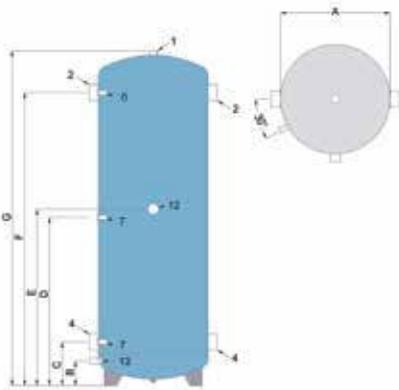

- 1. Vent 1"
- 2. Water connection 1" 1/4
- 4. Water connection 1" 1/4
- 6. Probe 1/2"
- 7. Probe 1/2"
- 12. Electric resistance 1" 1/2
- 13. Drain 1/2"

B0618 Resistance for boiler 2 kW

Compatible with:

suspended tower

SHERPA	<input type="radio"/>	—
--------	-----------------------	---

SHERPA COLD	<input type="radio"/>
SHERPA MONOBLOC	<input type="radio"/>



B0666 Resistance for boiler 3 kW

Compatible with:

suspended tower

SHERPA	<input type="radio"/>	—
--------	-----------------------	---

SHERPA COLD	<input type="radio"/>
SHERPA MONOBLOC	<input type="radio"/>



Immersion in copper, IP 65, with internal adjustable thermostat and temperature limiter.

TECHNICAL DATA		B0618	B0666
Absorbed power	W	2000	3000
Supply voltage	V	230	230
Weight	Kg	1,5	1,5
Length (L)	mm	390	390
Diameter of coupling	inch	1 1/2	1 1/2

Optional accessory | — Accessory not compatible

Please note that optional accessories are available for purchase with all models of the heat pump. When compatibility is only possible with certain sizes, the information is shown in the table. Standard accessories are already included in the heat pump code.

B0617

Resistance flange kit

Required accessory for correct positioning of the electric heating elements when used for anti-Legionnaires disease cycles.


Compatible with:

	suspended	tower		
SHERPA	<input checked="" type="radio"/>	<input type="radio"/>	SHERPA COLD	<input checked="" type="radio"/>
			SHERPA MONOBLOC	<input checked="" type="radio"/>


System diagrams

Sherpa Aquadue heat pumps

SHERPA AQUADUE S2/S3 heat pump (heating and air conditioning; production of high temperature DHW); Bi2 SLR radiant fan coil units; example of a two-zone configuration with a simple manifold and integrated inertial storage (used as a hydraulic separator) for the air conditioning system.

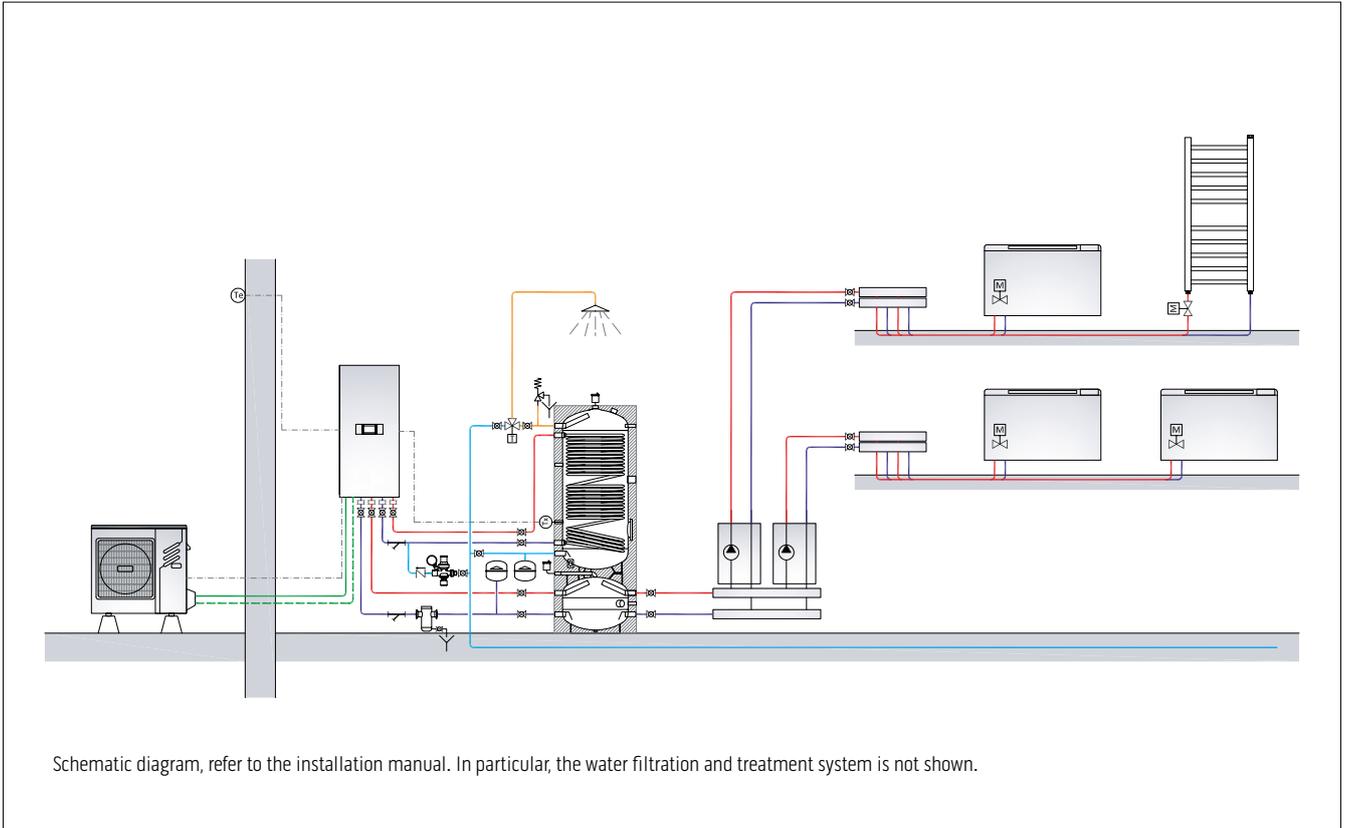


SHERPA AQUADUE TOWER S2/S3 heat pump (heating and air conditioning; production of high temperature DHW); Bi2 SLR radiant fan coil units; example of a two-zone configuration with a simple manifold and inertial storage (used as a hydraulic separator) for the air conditioning system.

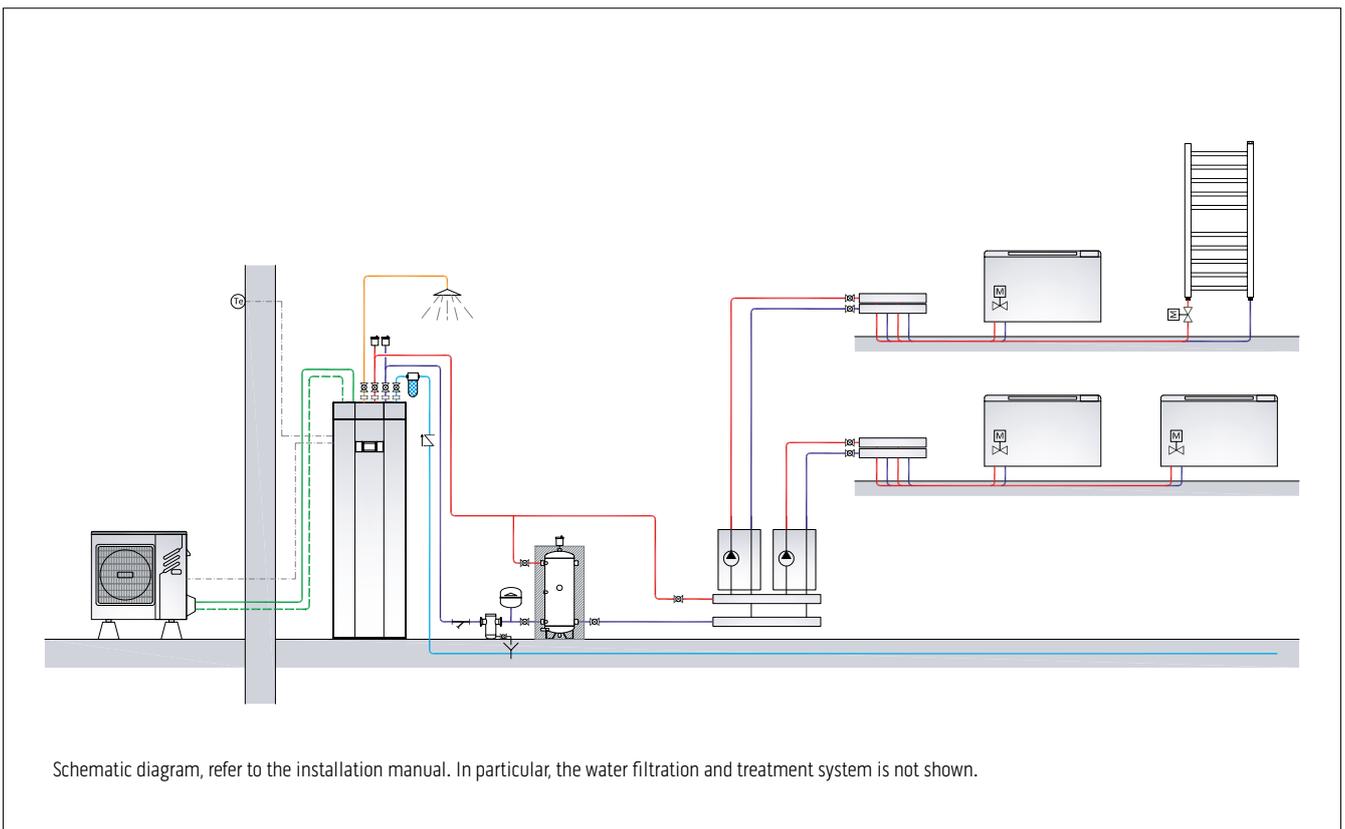


Sherpa heat pumps

SHERPA S2/S3 heat pump (heating and air conditioning; DHW production) Bi2 SLR radiant fan coil units; domestic water integration with solar thermal and integrated inertial storage (used as hydraulic separator) for the air conditioning system.

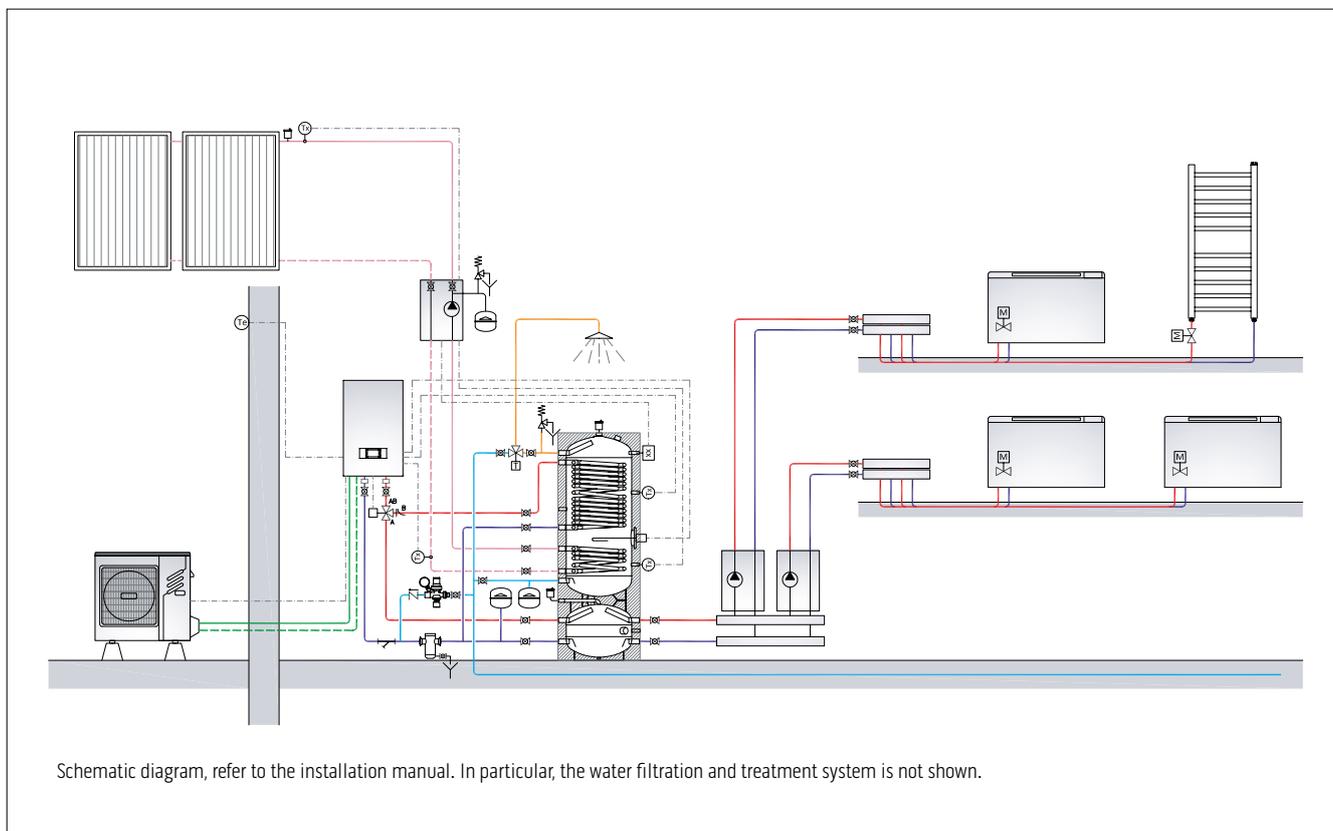


SHERPA TOWER S2/S3 heat pump (heating and air conditioning; DHW production) Bi2 SLR radiant fan coil units with 3-way valves and inertial storage in series on the return pipe of the air conditioning system.

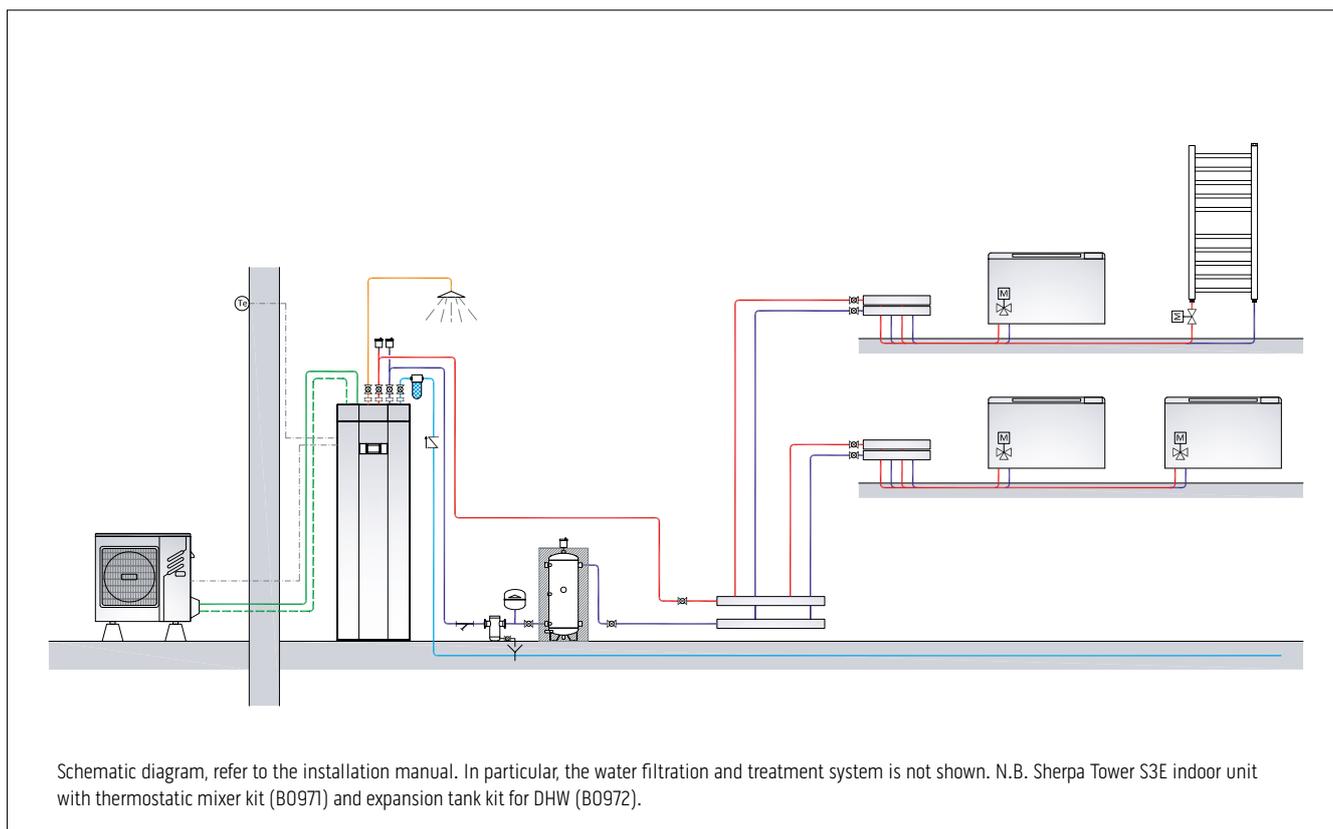


Kit Sherpa Flex Box

SHERPA AQUADUE S3 E heat pump or SHERPA S3 E with SHERPA FLEX BOX AS KIT (heating and air conditioning; production of high temperature DHW); Bi2 SLR radiant fan coil units with 3-way valves.

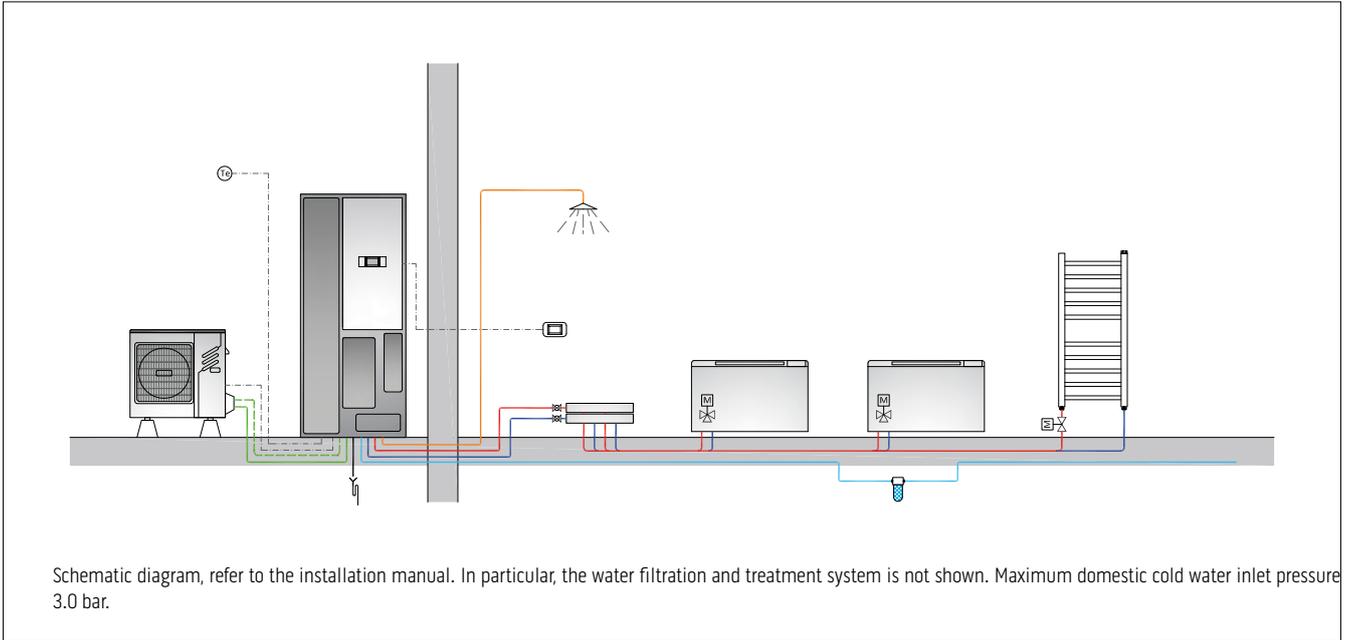


Sherpa Cold heat pumps

SHERPA COLD heat pump (heating and air conditioning; production of DHW) Bi2 SLR radiant fan coil units with 3-way valves and inertial storage tank (used as hydraulic separator). Storage of technical water with instant DHW production. It is mandatory to provide safety valves and appropriately sized expansion tanks outside the heat pump.

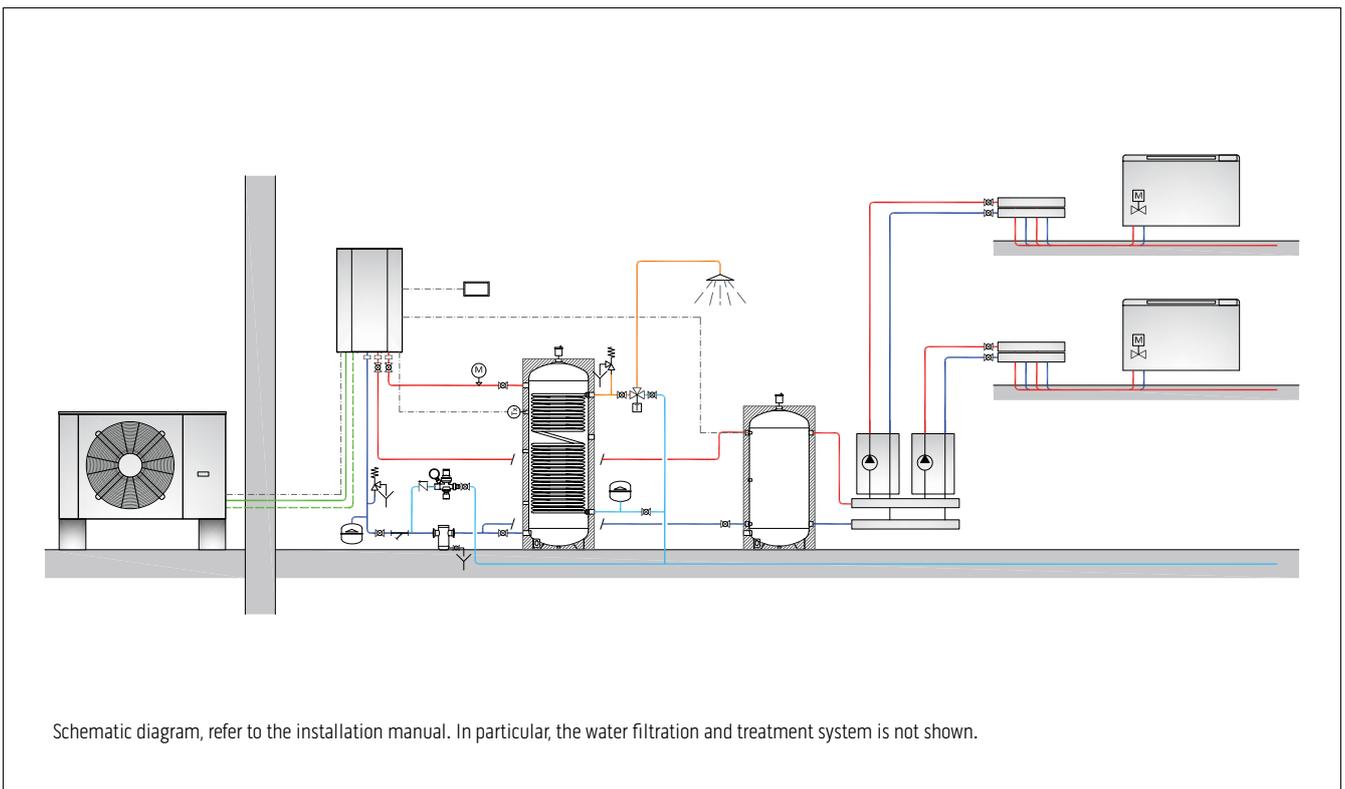


Sherpa Monobloc heat pumps

SHERPA MONOBLOC S2 E heat pump (heating and air conditioning) Bi2 SLR radiant fan coil units with 3-way valves and inertial storage in series on the return pipe of the air conditioning system.

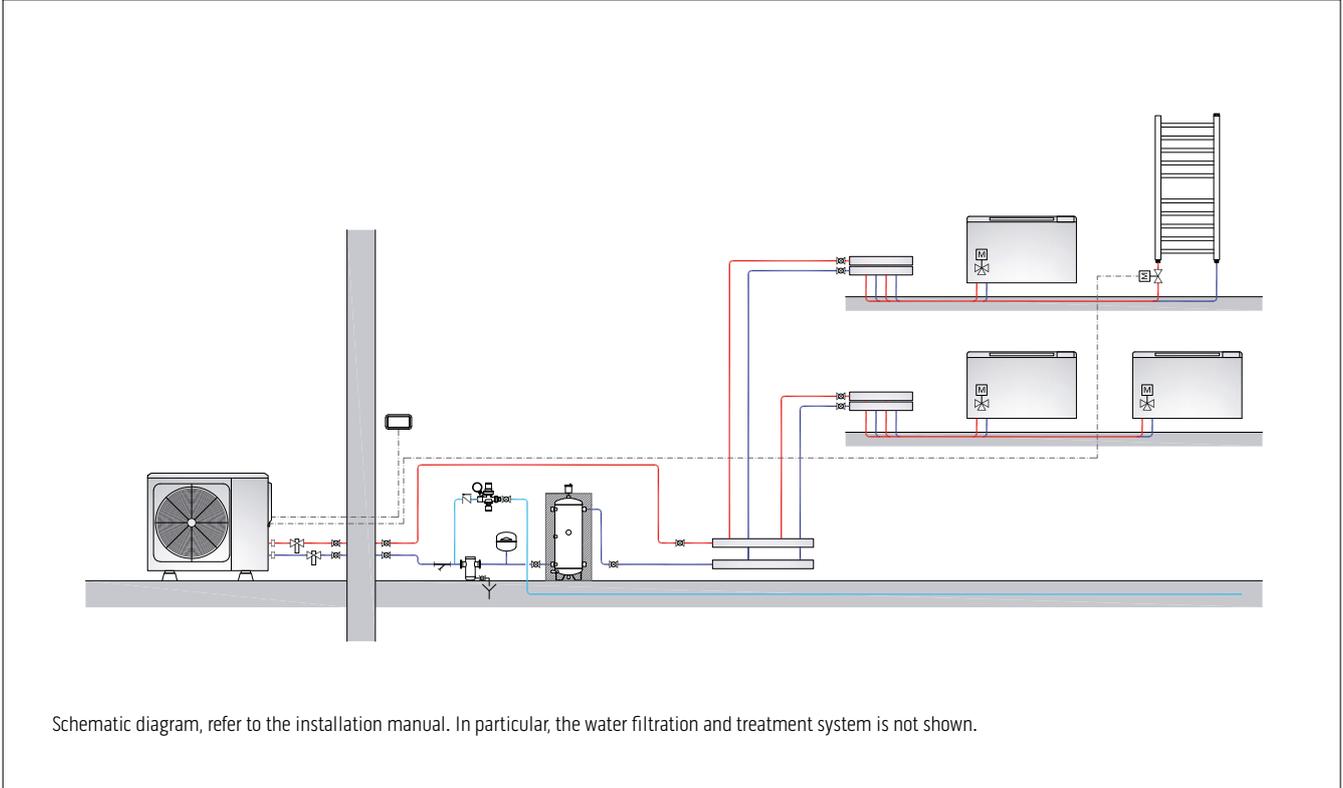

SHERPA MONOBLOC S2 E heat pump (heating and air conditioning; DHW production) Bi2 SLR radiant fan coil units, domestic water integration with solar thermal and integrated inertial storage (used as hydraulic separator) for the air conditioning system.

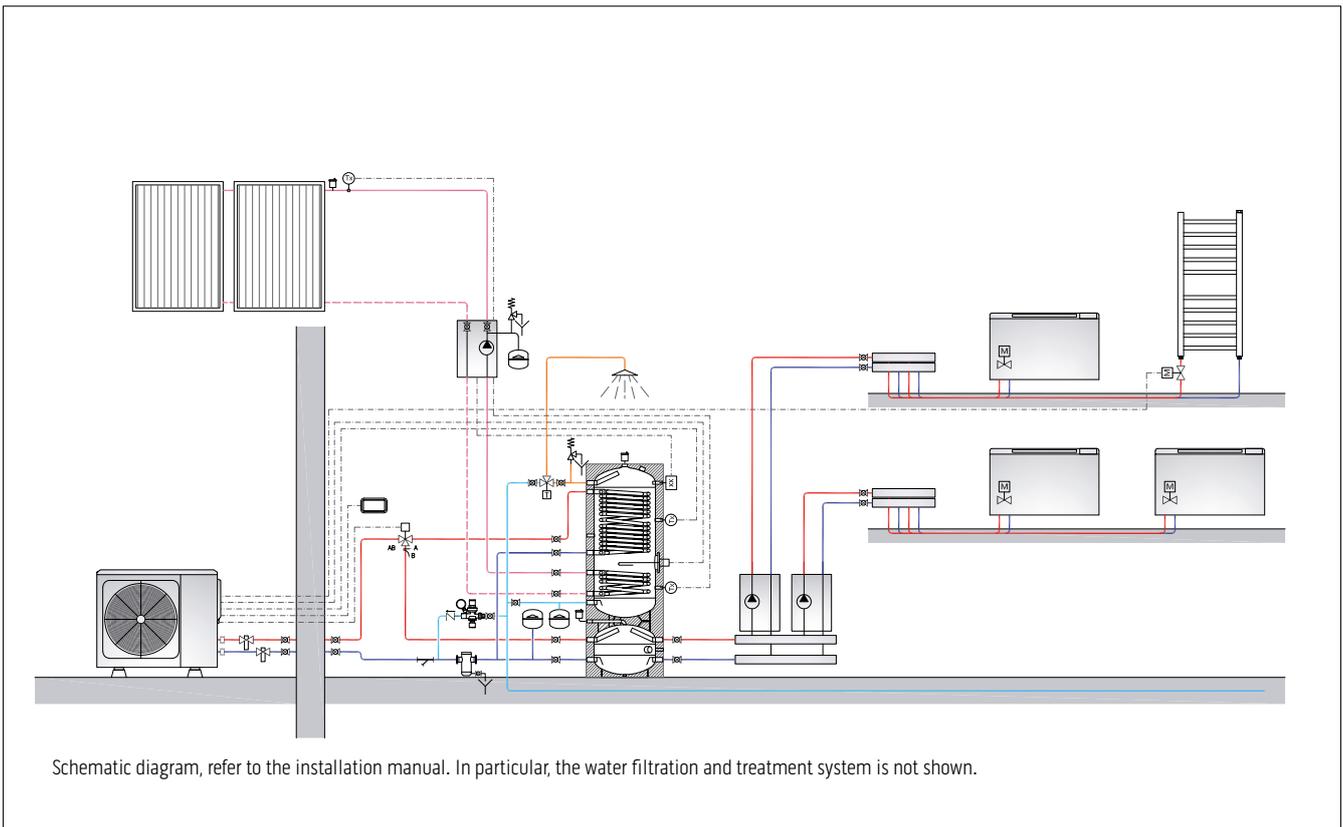



Olimpia Splendid participates in the ECP programme for FCU. Check ongoing validity of certificate: www.eurovent-certification.com



Bi2

Hydronic system terminal
units for annual cycle comfort



Italian design winner of numerous international awards

Ultraslim and slim innovation

Attention to design and harmonious integration into the architecture has led Olimpia Splendid to reinvent fan coil units, introducing ultraslim (up to 12.9 cm) and slim (up to 17.9 cm) fan coils with reduced thicknesses to the market.

Design signed by Italian studios

The Bi2 fan coil units boast prestigious names in the world of Italian industrial design. Each product is in fact designed with particular attention to architectural integration and ease of installation, management and maintenance. Olimpia Splendid has won 7 international awards for the aesthetics of its fan coil units, from 2013 to today.

Made in Italy quality

Olimpia Splendid production is within its headquarters in Cellatica (BS). The typically Italian attention to detail is a further guarantee of product quality.

ULTRASLIM
Spessore 12,9 cm





SLIM
Spessore 17,9 cm





Innovative solutions to rethink the fan coil units

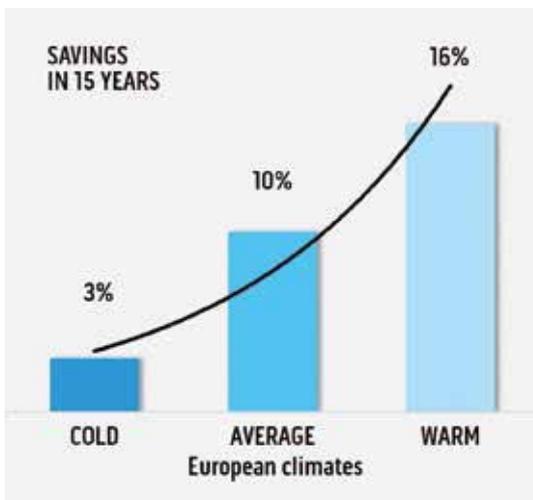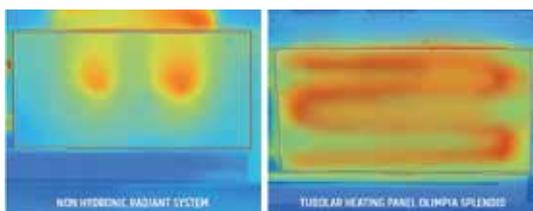

Olimpia Splendid radiant technology

The Bi2 fan coil units are also available in the radiant version, with a tubular heating panel, in addition to the coil, which stands out for its superior performance compared to other systems with radiant technology on the market: - higher radiated power, thanks to the higher average surface temperature; - amplification of natural convection; - possibility of static operation (fan off) for the complete absence of noise.


Comfort and optimised running costs

The slim and ultraslim radiant fan coil units offer comfort at least equal to that of floor heating, with greater flexibility, lower installation costs and more economical running, especially in warmer climates. The data shown in the graph refer to a comparative study commissioned by Olimpia Splendid to evaluate the different performances of a system, depending on whether the radiant fan coil units are used rather than the floor heating.

Installation

The choice of position

The Bi2 fan coil units are extremely versatile and can be installed both on the floor and on a low wall. The SL models, with traditional convection technology, are also suitable for ceiling installation, while the ultraslim SLW solutions are easily placed on high or low walls, with a considerably reduced footprint, thanks to the console format. Please note: for all models, if wall-mounted thermostats are not used, the installation of 2- or 3-way valves is recommended for optimal cooling operation.

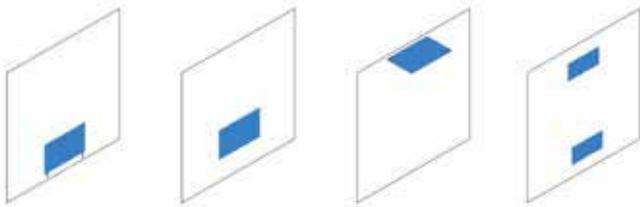

Operation

The modes for providing comfort

The structure of the fan of the Bi2 fan coil units and the electric motor that modulates its speed ensure even air distribution and homogeneity of temperature in the environment. The entire range has two operating modes: heating and cooling, with forced convection. In the SLR models, with Olimpia Splendid radiant technology, the heating mode also works in static mode (fan off), with natural convection and radiation from the front panel, for maximum acoustic comfort.



Maintenance

How to clean the fan coil unit

The easily removable air filters make cleaning and maintenance of the fan coil unit particularly easy, even in the built-in models.





PORTABLES

MONO AND MULTISPLIT

UNICO

HRV

FAN COIL UNITS

HEAT PUMPS

BMS

System terminal units

Console FCU - brushless DC motors		ULTRASLIM DESIGN		
		200	400	600
Bi2 AIR Integral design, motorised flap and integrated control.	SLR VERSION	SLR AIR 200 DC TR (01856)	SLR AIR 400 DC TR (01857)	SLR AIR 600 DC TR (01858)
		SLR AIR 200 DC AR (01772)	SLR AIR 400 DC AR (01773)	SLR AIR 600 DC AR (01774)
	SL VERSION	SL AIR 200 DC TR (01851)	SL AIR 400 DC TR (01852)	SL AIR 600 DC TR (01853)
		SL AIR 200 DC AR (01767)	SL AIR 400 DC AR (01768)	SL AIR 600 DC AR (01769)
		∟ 12,9 cm	∟ 12,9 cm	∟ 12,9 cm

Bi2 SMART Total flat design.	SLR VERSION	SLR SMART S1 200 B DC (02127)	SLR SMART S1 400 B DC (02128)	SLR SMART S1 600 B DC (02129)
	SL VERSION	SL SMART S1 200 B DC (02122)	SL SMART S1 400 B DC (02123)	SL SMART S1 600 B DC (02124)
		∟ 12,9 cm	∟ 12,9 cm	∟ 12,9 cm

Bi2 NAKED Built-in	SLIR VERSION	SLIR 200 DC (01639)	SLIR 400 DC (01640)	SLIR 600 DC (01641)
	SLI VERSION	SLI 200 DC (01513)	SLI 400 DC (01514)	SLI 600 DC (01515)
		∟ 14,2 cm	∟ 14,2 cm	∟ 14,2 cm

High-wall FCU - brushless DC motors		ULTRASLIM DESIGN REVERSIBLE	
		400	600
Bi2 WALL motorised flap and integrated control.	2-WAY VERSION	SLW 400 DC V2V TR (01784)	SLW 600 DC V2V TR (01785)
		SLW 400 DC V2V AR (01875)	SLW 600 DC V2V AR (01876)
	3-WAY VERSION	SLW 400 DC V3V TR (01787)	SLW 600 DC V3V TR (01788)
		SLW 400 DC V3V AR (01878)	SLW 600 DC V3V AR (01879)
		∟ 12,9 cm	∟ 12,9 cm

Ci2 WALL Motorised flap			
-----------------------------------	---	--	--

SLIM DESIGN

800	1000	1100	1400	1600
SLR AIR 800 DC TR (01859)	SLR AIR 1000 DC TR (01860)	SLR AIR 1100 DC TR (02360)	SLR AIR 1400 DC TR (02052)	SLR AIR 1600 DC TR (02054)
SLR AIR 800 DC AR (01775)	SLR AIR 1000 DC AR (01776)	SLR AIR 1100 DC AR (02359)	SLR AIR 1400 DC AR (02053)	SLR AIR 1600 DC AR (02055)
SL AIR 800 DC TR (01854)	SL AIR 1000 DC TR (01855)	SL AIR 1100 DC TR (02362)	SL AIR 1400 DC TR (02048)	SL AIR 1600 DC TR (02050)
SL AIR 800 DC AR (01770)	SL AIR 1000 DC AR (01771)	SL AIR 1100 DC AR (02361)	SL AIR 1400 DC AR (02049)	SL AIR 1600 DC AR (02051)
∟ 12,9 cm	∟ 12,9 cm	∟ 17,9 cm	∟ 17,9 cm	∟ 17,9 cm

SLR SMART S1 800 B DC (02130)				
SL SMART S1 800 B DC (02125)	SL SMART S1 1000 B DC (02126)			
∟ 12,9 cm	∟ 12,9 cm			

SLIR 800 DC (01642)		SLIR 1100 DC (02364)	SLIR 1400 DC (02071)	SLIR 1600 DC (02072)
SLI 800 DC (01516)		SLI 1100 DC (02363)	SLI 1400 DC (02056)	SLI 1600 DC (02057)
∟ 14,2 cm		∟ 21,7 cm	∟ 21,7 cm	∟ 21,7 cm

SLIM DESIGN

800	1000	1200	1400
SLW 800 DC V2V TR (01786)	SLW 1000 DC V2V TR (02467)	SLW 1200 DC V2V TR (02459)	SLW 1400 DC V2V TR (02463)
SLW 800 DC V2V AR (01877)	SLW 1000 DC V2V AR (02468)	SLW 1200 DC V2V AR (02460)	SLW 1400 DC V2V AR (02464)
SLW 800 DC V3V TR (01789)	SLW 1000 DC V3V TR (02465)	SLW 1200 DC V3V TR (02457)	SLW 1400 DC V3V TR (02461)
SLW 800 DC V3V AR (01880)	SLW 1000 DC V3V AR (02466)	SLW 1200 DC V3V AR (02458)	SLW 1400 DC V3V AR (02462)
∟ 12,9 cm	∟ 22,6 cm	∟ 22,6 cm	∟ 22,6 cm

		LGW WALL S1 1200 DC (99283)	LGW WALL S1 1400 DC (99284)
		∟ 23,0 cm	∟ 23,0 cm

Bi2 AIR

SL

SLR



Compatible with:
SIOS CONTROL

Ultraslim fan coil units, SL and SLR versions



INTEGRAL DESIGN

Front and side panels are joined for easy installation and maintenance.



MULTISET CONTROL

Integrated electronics allows touch operation, remote control and home automation connection.



FEATURES

- Heats, Cools, Dehumidifies and Filters.
- Integral aesthetics with intake from the lower side.
- Front in metal, sides in ABS.
- Compact: Min thickness 12,9 cm max 15 cm.
- Range consisting of 5 power modules.
- DC brushless motor.
- Monobloc body for work in comfort.
- Motorised steel air delivery flap.
- Anti-intrusion grilles on the air intake and outlet.
- Removable filters placed on the air intake.
- Remote control supplied (only for TR control).
- Available in the colours: White RAL 9003

INTEGRATED CONTROLS AS STANDARD

TR (Touch Remote) CONTROL:

includes on-board touch control and remote control (supplied). Additionally, through a combination of keys, it is possible to remotely* control with a B0736 wall remote control or a home automation control (SIOS Control by Olimpia Splendid or MyHome by Bticino), via the Modbus RS485 ASCII serial protocol.

AR (Analog Remote) CONTROL:


allows remote control by interfacing with wall controls or home automation control systems via 0-10V analog input or contacts (for fan coil radiators, use the contact mode). It has a 230Vac output for control of a solenoid valve and a water probe inlet with the function of a minimum probe (for both modes of remote control). **AR models on request.**

LAYOUT, DIMENSIONS, WEIGHT

- Heat exchanger battery
- High efficiency radiant heating panel (SLR version)
- Tangential fan
- Brushless DC electric motor
- Air delivery flap and anti-intrusion delivery grille
- Condensation trap
- Front body in electrogalvanised sheet metal
- Anti-intrusion intake grille
- Sides in ABS
- On-board touch control (TR version)



		200	400	600	800	1000
A	mm	695	895	1095	1295	1495
B	mm	599	599	599	599	599
C	mm	679	679	679	679	679
D	mm	129	129	129	129	129
E	mm	150	150	150	150	150
Weight SL	kg	11.5	13.0	15.5	18.5	21.5
Weight SLR	kg	13.5	15.5	19.5	22.5	25.5

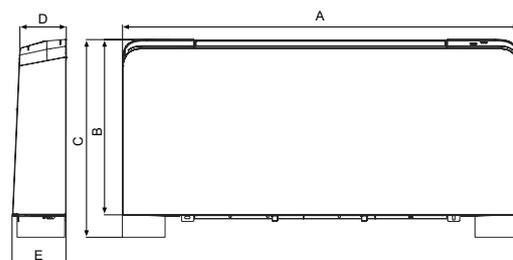

INSTALLATION

Floor mounted, wall mounted or (only for SL versions) ceiling mounted.**



* With the exception of the combination with SIOS Control, in all other cases: Touch control on the machine, air probe on the machine and remote control disabled
**Ceiling installation: kits required for ceiling installation and foot kit. The foot kit is optimised for floor installation.

TECHNICAL DATA				200			400			600			800			1000						
SL Air inverter (with TR command)				01851			01852			01853			01854			01855						
SL Air inverter (with AR command)				01767			01768			01769			01770			01771						
SLR Air inverter (with TR command)				01856			01857			01858			01859			01860						
SLR Air omvormer (with AR command)				01772			01773			01774			01775			01776						
Fan speed				Lower	Middle	High	Lower	Middle	High	Lower	Middle	High	Lower	Middle	High	Lower	Middle	High				
Total power output in cooling mode				a27/19 - w7/12	(a)	(E)	kW	0.38	0.71	0.82	0.91	1.34	1.74	1.50	2.10	2.54	1.98	2.69	3.29	2.17	3.25	3.78
Sensitive power output in cooling mode				a27/19 - w7/12	(a)	(E)	kW	0.26	0.50	0.64	0.65	1.02	1.25	1.10	1.56	1.94	1.54	2.09	2.54	1.71	2.42	2.98
Fluid flow rate				a27/19 - w7/12	(a)		l/h	66.2	123.3	142.9	157.6	232.0	302.5	259.2	363.1	440.3	341.9	464.7	570.0	374.8	561.4	654.8
Water side head loss				a27/19 - w7/12	(a)	(E)	kPa	3.8	10.6	13.1	2.4	5.5	8.2	7.5	14.2	19	7.3	13.8	18.7	5.7	13.1	18.2
Total power output in heating mode				a20/15 - w50/-	(b)	(E)	kW	0.64	0.84	1.05	1.25	1.65	2.31	1.75	2.56	3.12	2.21	3.10	4.10	3.05	3.77	4.67
Fluid flow rate				a20/15 - w50/-	(b)		l/h	66.2	123.3	142.9	157.6	232.0	302.5	259.2	363.1	440.3	341.9	464.7	570.0	374.8	561.4	654.8
Water side head loss				a20/15 - w50/-	(b)	(E)	kPa	3.2	8.8	10.9	2.0	4.6	6.8	6.2	11.8	15.8	6.1	11.5	15.5	4.7	10.9	15.1
Total power output in heating mode				a20/15 - w45/40	(c)	(E)	kW	0.54	0.70	0.88	1.06	1.39	1.94	1.46	2.14	2.60	1.85	2.60	3.44	2.56	3.16	3.91
Fluid flow rate				a20/15 - w45/40	(c)		l/h	91.9	119.9	150.0	181.9	238.1	330.3	250.6	365.7	444.6	316.6	444.8	587.9	438.1	541.0	668.5
Water side head loss				a20/15 - w45/40	(c)	(E)	kPa	5.7	8.8	12.2	2.9	4.8	7.9	5.8	11.8	16.0	4.1	8.9	14.2	6.4	9.8	13.9
Absorbed power						(E)	W	5	7	11	6	9	19	7	11	20	8	12	24	9	14	27
Sound Power Lw (A)						(E)	dB(A)	38	45	52	39	46	53	41	47	53	42	48	54	42	48	54
Sound pressure Lp (A)						(d)	dB(A)	29	36	43	30	37	44	32	38	44	33	39	45	33	39	45
Air flow rate						(f)	m3/h	100	130	160	190	250	320	280	360	460	350	450	575	400	510	650
Battery water content							l		0.47			0.8			1.13			1.46			1.8	
Maximum operating pressure							bar		10			10			10			10			10	
Hydraulic fittings							inch		Eurocone 3/4			Eurocone 3/4										
Electrical power supply							V/ph/Hz		230/1/50			230/1/50			230/1/50			230/1/50			230/1/50	
SLR ONLY	Max static heating efficiency (50°C)						kW		0.37			0.42			0.5			0.62			0.77	
	Max static heating efficiency (70°C)						kW		0.59			0.71			0.84			1.04			1.28	
	Water content of the radiant panel						l		0.19			0.27			0.35			0.43			0.50	

The above services refer to the following operating conditions:

- (a) Cooling mode at standard conditions: air temperature 27°C b.s., 19°C b.u., water inlet temperature 7°C, water outlet temperature 12°C
- (b) Heating mode conditions of use 1: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 50°C, water flow equal to the cooling water standard condition
- (c) Heating mode standard conditions: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 45°C, water outlet temperature 40°C

- (d) Sound pressure level valid for closed rooms with a volume of 100 m3 with a reverberation time of 0.5 s and installation on the floor/ceiling, sound emission on 1/4 sphere at 3 m distance
- (E) Eurovent certified data
- (f) Air flow rate measured with clean filters

ACCESSORIES

			SL	SLR
CONTROLS	B0736	Wall-mounted Modbus chrono-thermostat kit	TR	TR
	B0921	Contact touch wall-mounted thermostat kit	AR	—
	INDRZ	Addressing of the Modbus control kit	TR	TR
HYDRAULICS KIT	B0839	LH-RH connection rotation extension kit	○	○
	B0832	2-way valve group kit with 4-wire actuator	○	○
	B0834	3-way valve group kit with 4-wire actuator	○	○
	B0205	Manual 2-way valve group kit	○	○
	B0204	Manual 2-way valve insulation kit	○	○
	B0200	Adapter connection kit for 1/2" gas thread	○	○
	B0201	Adapter connection kit for 3/4" gas thread	○	○
B0203	Eurokonus 90° bending connection kit	○	○	

○ Optional accessory | — Accessory not compatible

ACCESSORIES

		SL	SLR
AESTHETIC KITS	B0852	Floor mounting bracket kit	≤ 1000 ≤ 1000
	B0853	Aesthetic kit feet for covering	≤ 1000 ≤ 1000
	B0847	Back panel	200 200
	B0848	Back panel	400 400
	B0849	Back panel	600 600
	B0850	Back panel	800 800
	B0851	Back panel	1000 1000
	B0520	Ceiling-mount kit (condensation trap)	200 —
	B0521	Ceiling-mount kit (condensation trap)	400 —
	B0522	Ceiling-mount kit (condensation trap)	600 —
B0523	Ceiling-mount kit (condensation trap)	800 —	
B0524	Ceiling-mount kit (condensation trap)	1000 —	

Accessory description on page 92

Please note that optional accessories are available for purchase in conjunction with all models of the terminal. When compatibility is only possible with certain sizes or models, the information is shown in the table.

Bi2 AIR



Slim fan coil units, SL and SLR versions



PRO-POWER

Up to 4.85 kW of power, for larger spaces and colder climates.



INTEGRAL DESIGN

Front and side panels are joined for easy installation and maintenance.



MULTISET CONTROL

Integrated electronics allows touch operation, remote control and home automation connection.



FEATURES

- Heats, Cools, Dehumidifies and Filters.
- Integral aesthetics with intake from the lower side.
- Front in metal, sides in ABS.
- Compact: Min thickness 17,9 cm max 20 cm.
- Range consisting of 3 power modules.
- DC brushless motor.
- Monobloc body for work in comfort.
- Double motorised steel air delivery flap.
- Anti-intrusion grilles on the air intake and outlet.
- Removable filters placed on the air intake.
- Remote control supplied (only for TR control).
- Available in the colours: White RAL 9003

INTEGRATED CONTROLS AS STANDARD

TR (Touch Remote) CONTROL:

includes on-board touch control and remote control (supplied). Additionally, through a combination of keys, it is possible to remotely* control with a B0736 wall remote control or a home automation control (SiOS Control by Olimpia Splendid or MyHome by Bticino), via the Modbus RS485 serial protocol (ASCII or RTU). In addition, a correction of the room temperature read can be added via the user interface.

AR (Analog Remote) CONTROL:


Allows remote control by interfacing with wall controls or home automation control systems via 0-10V analog input or contacts (for radiant fan coil units, use the contact mode). It has a 230Vac output for control of a solenoid valve and a water probe inlet with the function of a minimum probe (for both modes of remote control). **AR models on request.**

LAYOUT, DIMENSIONS, WEIGHT

1. Heat exchanger battery
2. High efficiency radiant heating panel (SLR version)
3. Tangential fan
4. Brushless DC electric motor
5. Air delivery flap and anti-intrusion delivery grille
6. Condensation trap
7. Front body in electrogalvanised sheet metal
8. Anti-intrusion intake grille
9. Sides in ABS
10. On-board touch control (TR version)



		1100	1400	1600
A	mm	1345	1345	1415
B	mm	599	599	599
C	mm	719	719	719
D	mm	179	179	179
E	mm	200	200	200
Weight SL	kg	22,0	22,5	24
Weight SLR	kg	24,0	24,5	26

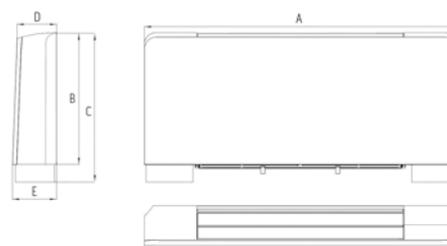

INSTALLATION

Floor mounted, wall mounted or (only for SL versions) ceiling mounted.**



* With the exception of the combination with SiOS Control, in all other cases: Touch control on the machine, air probe on the machine and remote control disabled
 **Ceiling installation: kits required for ceiling installation and foot kit. The foot kit is optimised for floor installation.

TECHNICAL DATA				1100			1400			1600			
SL Air inverter (with TR command)				02362			02048			02050			
SL Air inverter (with AR command)				02361			02049			02051			
SLR Air inverter (with TR command)				02360			02052			02054			
SLR Air omvormer (with AR command)				02359			02053			02055			
Fan speed				Lower	Middle	High	Lower	Middle	High	Lower	Middle	High	
Total power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW	2.43	3.24	3.85	3.05	3.78	4.45	3.28	4.09	4.85
Sensitive power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW	1.78	2.41	2.93	2.14	2.69	3.20	2.30	2.90	3.50
Fluid flow rate	a27/19 - w7/12	(a)		l/h	417.4	557.3	664.2	525.6	652.4	769.9	565.2	706	839.2
Water side head loss	a27/19 - w7/12	(a)	(E)	kPa	13.9	23.7	32.6	19	27.8	37.2	20.9	30.8	41
Total power output in heating mode	a20/15 - w50/-	(b)	(E)	kW	2.88	4.06	4.8	3.61	4.53	5.50	3.85	4.87	5.90
Fluid flow rate	a20/15 - w50/-	(b)		l/h	417.4	557.3	664.2	525.6	652.4	769.9	565.2	706	839.2
Water side head loss	a20/15 - w50/-	(b)	(E)	kPa	12.3	21.1	29.1	16.2	23.7	31.7	19.4	28.6	35.7
Total power output in heating mode	a20/15 - w45/40	(c)	(E)	kW	2.6	3.4	4.11	3.07	3.87	4.70	3.28	4.16	5.05
Fluid flow rate	a20/15 - w45/40	(c)		l/h	449	590	712	527.1	663.4	803.9	563.1	713	863.6
Water side head loss	a20/15 - w45/40	(c)	(E)	kPa	14.3	23.5	33.3	17.1	25.8	35.5	20.2	30.8	38.8
Absorbed power			(E)	W	6	13	26	6	13	26	6	15	29
Sound Power Lw (A)			(E)	dB(A)	39	46	50	38	49	54	39	50	55
Sound pressure Lp (A)			(d)	dB(A)	30	41	46	30	41	46	31	42	47
Air flow rate			(f)	m ³ /h	460	610	765	460	610	765	490	655	820
Battery water content				l		1.94			2.33			2.5	
Maximum operating pressure				bar		10			10			10	
Hydraulic fittings				inch		Eurocone 3/4			Eurocone 3/4			Eurocone 3/4	
Electrical power supply				V/ph/Hz		230/1/50			230/1/50			230/1/50	
Max static heating efficiency (50°C)				kW		0.45			0.45			0.5	
Max static heating efficiency (70°C)				kW		0.8			0.8			0.9	
Water content of the radiant panel				l		0.43			0.43			0.43	

The above services refer to the following operating conditions:

(a) Cooling mode at standard conditions: air temperature 27°C b.s., 19°C b.u., water inlet temperature 7°C, water outlet temperature 12°C

(b) Heating mode conditions of use 1: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 50°C, water flow equal to the cooling water standard condition

(c) Heating mode standard conditions: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 45°C, water outlet temperature 40°C

(d) Sound pressure level valid for closed rooms with a volume of 100 m³ with a reverberation time of 0.5 s and installation on the floor/ceiling, sound emission on 1/4 sphere at 3 m distance

(E) Eurovent certified data

(f) Air flow rate measured with clean filters

ACCESSORIES

			SL	SLR
CONTROLS	B0736	Wall-mounted Modbus chrono-thermostat kit	TR	TR
	B0921	Contact touch wall-mounted thermostat kit	AR	—
	INDRZ	Addressing of the Modbus control kit	TR	TR
HYDRAULICS KIT	B0839	LH-RH connection rotation extension kit	○	○
	B0832	2-way valve group kit with 4-wire actuator	○	○
	B0834	3-way valve group kit with 4-wire actuator	○	○
	B0205	Manual 2-way valve group kit	○	○
	B0204	Manual 2-way valve insulation kit	○	○
	B0200	Adapter connection kit for 1/2" gas thread	○	○
	B0201	Adapter connection kit for 3/4" gas thread	○	○
B0203	Eurokonus 90° bending connection kit	○	○	

○ Optional accessory | — Accessory not compatible

		SL	SLR	
AESTHETIC KITS	B0875	Floor mounting bracket kit	≥ 1100	≥ 1100
	B0874	Aesthetic kit feet for covering	≥ 1100	≥ 1100
	B0876	Back panel	1100	1100
	B0876	Back panel	1400	1400
	B0877	Back panel	1600	1600
	B0878	Ceiling-mount kit (condensation trap)	1100	—
	B0878	Ceiling-mount kit (condensation trap)	1400	—
	B0879	Ceiling-mount kit (condensation trap)	1600	—

Accessory description on page 92

Please note that optional accessories are available for purchase in conjunction with all models of the terminal. When compatibility is only possible with certain sizes or models, the information is shown in the table.

Bi2 WALL

Ultra-slim high-wall terminal units



Compatible with:
SIOS
CONTROL



REVERSIBILITY

By rotating the display, Bi2 Wall can be installed as a split unit or a console machine.



FAMILY FEELING

Similar design as the Bi2 Air terminal to allow aesthetically coordinated installations in the same environment.



MULTISET CONTROL


Integrated electronics allows touch operation, remote control and home automation connection.



FEATURES

- Heats, Cools, Dehumidifies and Filters
- Brushless DC motor
- Equipped with large motorised flap
- Total flat aesthetics
- Compact: Thickness min. 12.9 cm max 15 cm.
- Range consisting of 3 models of different power.
- Fan coil unit supplied with 2 or 3-way valve integrated with 4 wire electrothermic actuators.
- Monobloc body for comfortable working.
- Motorised steel air delivery flap.
- Extractable filters placed on the air intake.
- Remote control supplied (only for TR control)
- Robust metal body
- Available in the colours: White RAL 9003

LAYOUT, DIMENSIONS, WEIGHT

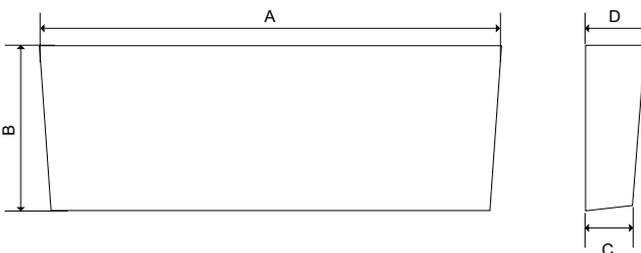

INTEGRATED CONTROLS AS STANDARD

TR (Touch Remote) CONTROL:

includes on-board touch control and a remote control (supplied). Additionally, through a combination of keys, it is possible to remotely* control with a B0736 wall remote control or a home automation control (SiOS Control by Olimpia Splendid or MyHome by Bticino), via the Modbus RS485 (ASCII or RTU) serial protocol. In addition through the user interface it is possible to add a correction on the read ambient temperature.

AR (Analog Remote) CONTROL:

allows remote control by interfacing with wall controls or home automation control systems via 0-10V analog input or contacts (for radiant fan coil units, use the contact mode). It has a 230Vac output for control of a solenoid valve and a water probe inlet with the function of a minimum probe (only for use in contact mode). **AR models on request.**

		400	600	800
A	mm	906	1106	1306
B	mm	380	380	380
C	mm	129	129	129
D	mm	150	150	150
Weight	kg	13	14.5	16

INSTALLATION

Console and high-wall.



* With the exception of the combination with SiOS Control, in all other cases: Touch control on the machine, air probe on the machine and remote control disabled

TECHNICAL DATA				400			600			800			
SLW inverter (with 2-way valve and TR command)				01784			01785			01786			
SLW inverter (with 2-way valve and AR command)				01875			01876			01877			
SLW inverter (with 3-way valve and TR command)				01787			01788			01789			
SLW inverter (with 3-way valve and AR command)				01878			01879			01880			
Fan speed				Lower	Middle	High	Lower	Middle	High	Lower	Middle	High	
Total power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW	0.52	0.71	1.01	0.69	0.89	1.23	0.77	1.09	1.82
Sensitive power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW	0.42	0.59	0.91	0.58	0.80	1.15	0.65	0.95	1.47
Fluid flow rate	a27/19 - w7/12	(a)		l/h	90.6	124.0	177.0	120.1	155.1	215.5	134.0	189.7	317.7
Water side head loss	a27/19 - w7/12	(a)	(E)	kPa	2.8	5.2	8.9	4.9	6	7.9	2.1	4.8	11
Total power output in heating mode	a20/15 - w50/-	(b)	(E)	kW	0.67	0.99	1.55	0.98	1.37	2.16	1.14	1.68	2.85
Fluid flow rate	a20/15 - w50/-	(b)		l/h	90.6	124.0	177.0	120.1	155.1	215.5	134.0	189.7	317.7
Water side head loss	a20/15 - w50/-	(b)	(E)	kPa	2.4	4.5	7.1	1.9	2.9	2.5	2.0	4.6	8.8
Total power output in heating mode	a20/15 - w45/40	(c)	(E)	kW	0.58	0.86	1.40	0.86	1.20	1.90	0.99	1.45	2.50
Fluid flow rate	a20/15 - w45/40	(c)		l/h	99.1	146.3	237.5	146.5	204.6	322.8	168.1	247.8	425.4
Water side head loss	a20/15 - w45/40	(c)	(E)	kPa	3.4	6.7	11.6	6.7	11.9	5.4	8.5	16.4	15.3
Absorbed power			(E)	W	7	11	19	8	12	23	9	13	27
Sound Power Lw (A)			(E)	dB(A)	43	49	57	43	50	58	43	50	58
Sound pressure Lp (A)		(d)		dB(A)	34	40	48	34	41	49	34	41	49
Air flow rate		(f)		m ³ /h	140	190	290	190	260	400	200	280	430
Battery water content				l		0.3			0.4			0.5	
Maximum operating pressure				bar		8			8			8	
Hydraulic fittings				inch		Eurocone 3/4			Eurocone 3/4			Eurocone 3/4	
Electrical power supply				V/ph/Hz		230/1/50			230/1/50			230/1/50	
Max static heating efficiency (50°C)				kW		-			-			-	
Max static heating efficiency (70°C)				kW		-			-			-	
Water content of the radiant panel				l		-			-			-	

The above services refer to the following operating conditions:

(a) Cooling mode at standard conditions: air temperature 27°C b.s. 19°C b.u., water inlet temperature 7°C, water outlet temperature 12°C

(b) Heating mode conditions of use 1: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 50°C, water flow equal to the cooling water standard condition

(c) Heating mode standard conditions: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 45°C, water outlet temperature 40°C

(d) Sound pressure level valid for closed rooms with a volume of 100 m³ with a reverberation time of 0.5 s and installation on the floor/ceiling, sound emission on 1/4 sphere at 3 m distance

(E) Eurovent certified data

(f) Air flow rate measured with clean filters

ACCESSORIES

SLW

CONTROLS	Code	Description	TR
	B0736	Wall-mounted Modbus chrono-thermostat kit	TR
	B0921	Contact touch wall-mounted thermostat kit	AR
	INDRZ	Addressing of the Modbus control kit	TR


Accessory description on page 92

Maximum installation versatility

Bi2 Wall is the first ultraslim hydronic fan coil that can be installed as a high wall "split" (High Wall configuration) or as a low wall console machine (Console configuration). Depending on the installation configuration, with a combination of keys on the control on the machine, the display digits are rotated.

In the High Wall configuration the water connections are positioned on the right and the display is positioned on the left.

In the Console configuration the water connections are positioned on the left and the display is positioned on the right.

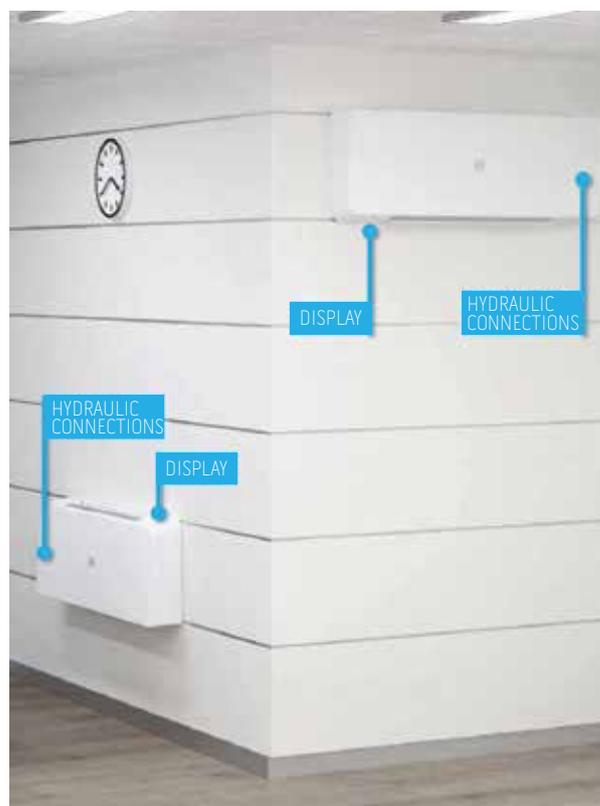

Please note that optional accessories are available for purchase in conjunction with all models of the terminal. When compatibility is only possible with certain sizes or models, the information is shown in the table.

NEW

Bi2 WALL

Slim high-wall terminal units



Compatible with:
SiOS CONTROL



COMPACT DESIGN

Specifically designed to minimise volume and expand the possibilities for over-door installation. With equal power, it is among the most compact on the market.



FAMILY FEELING

Similar design as the Bi2 Air terminal to allow aesthetically coordinated installations in the same environment.



MULTISET CONTROL

Integrated electronics allows touch operation, remote control and home automation connection.



FEATURES

- Heats, cools, dehumidifies and filters.
- DC brushless motor
- Total flat aesthetics.
- Range composed of 3 power models.
- Terminal unit supplied with 2 or 3-way valve integrated with 4-wire electro-thermal actuator.
- Single-piece body for working comfortably.
- Steel air delivery flap, motorised.
- Extractable filters located on the air intake.
- Remote control supplied (only for TR control).
- Optional condensation drain pump.
- Available in the colours: White RAL 9003

INTEGRATED CONTROLS AS STANDARD


TR (Touch Remote) CONTROL:

includes on-board touch control and remote control (supplied). Additionally, through a combination of keys, it is possible to obtain remote* control with a B0736 wall remote control or a home automation control (SiOS Control by Olimpia Splendid or MyHome by Bticino), via the Modbus RS485 serial protocol (ASCII or RTU). In addition, a correction of the room temperature read can be added via the user interface.

AR (Analogic Remote) CONTROL:

Allows remote control by interfacing with wall controls or home automation control systems via 0-10V analogue input or contacts (for fan coil radiators, use the contact mode). It has a 230Vac output for control of a solenoid valve and a water probe inlet with the function of a minimum probe (for both modes of remote control). **AR models on request.**

LAYOUT, DIMENSIONS, WEIGHT

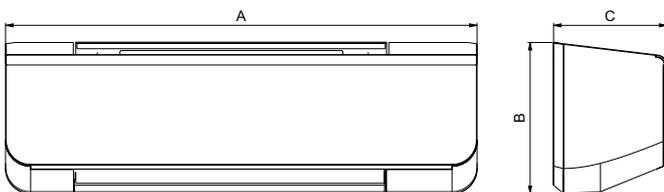

		1000	1200	1400
A	mm	940	940	940
B	mm	303	303	303
C	mm	226	226	226
Weight	kg	11	12	12

INSTALLATION

High-wall



* With the exception of the combination with SiOS Control, in all other cases: Touch control on the machine, air probe on the machine and remote control disabled

TECHNICAL DATA					1000			1200			1400		
SLW inverter (with 2-way valve and TR command)					02467			02459			02463		
SLW inverter (with 2-way valve and AR command)					02468			02460			02464		
SLW inverter (with 3-way valve and TR command)					02465			02457			02461		
SLW inverter (with 3-way valve and AR command)					02466			02458			02462		
Fan speed					Lower	Middle	High	Lower	Middle	High	Lower	Middle	High
Total power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW	1.10	1.90	2.40	1.90	2.50	3.10	2.20	3.20	3.90
Sensitive power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW	0.91	1.55	1.98	1.62	2.10	2.59	1.86	2.68	3.33
Fluid flow rate	a27/19 - w7/12	(a)		l/h	195.9	326.4	411.2	325.7	428.9	532.3	378.3	549.2	665.9
Water side head loss	a27/19 - w7/12	(a)	(E)	kPa	7.2	19.4	32.4	14.8	24.2	36.8	19.1	39.1	58.2
Total power output in heating mode	a20/15 - w50/-	(b)	(E)	kW	1.59	2.62	3.31	2.67	3.40	4.17	3.02	4.30	5.05
Fluid flow rate	a20/15 - w50/-	(b)		l/h	195.9	326.4	411.2	325.7	428.9	532.3	378.3	549.2	665.9
Water side head loss	a20/15 - w50/-	(b)	(E)	kPa	6.8	18.6	31.6	14.1	23.2	34.9	18.5	38.3	56.6
Total power output in heating mode	a20/15 - w45/40	(c)	(E)	kW	1.43	2.37	2.91	2.30	2.94	3.61	2.62	3.72	4.59
Fluid flow rate	a20/15 - w45/40	(c)		l/h	237.8	399.3	500.2	395.1	506.3	620.4	450.1	640.2	789.8
Water side head loss	a20/15 - w45/40	(c)	(E)	kPa	10.0	28.1	42.9	21.0	33.9	50.1	27.2	52.9	80.1
Absorbed power			(E)	W	8	15	22	9	14	21	11	23	38
Sound Power Lw (A)			(E)	dB(A)	37	45	51	38	43	48	40	50	56
Sound pressure Lp (A)		(d)		dB(A)	23	32	39	24	30	36	27	37	44
Air flow rate		(f)		m ³ /h	227	393	517	389	510	640	450	661	856
Battery water content				l		0.75			0.97			0.97	
Maximum operating pressure				bar		8			8			8	
Hydraulic fittings				inch		Piana 1/2			Piana 1/2			Piana 1/2	
Electrical power supply				V/ph/Hz		230/1/50			230/1/50			230/1/50	
Max static heating efficiency (50°C)				kW		-			-			-	
Max static heating efficiency (70°C)				kW		-			-			-	
Water content of the radiant panel				l		-			-			-	

The above services refer to the following operating conditions:

(a) Cooling mode at standard conditions: air temperature 27°C b.s., 19°C b.u., water inlet temperature 7°C, water outlet temperature 12°C

(b) Heating mode conditions of use 1: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 50°C, water flow equal to the cooling water standard condition

(c) Heating mode standard conditions: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 45°C, water outlet temperature 40°C

(d) Sound pressure level valid for closed rooms with a volume of 100 m³ with a reverberation time of 0.5 s and installation on the floor/ceiling, sound emission on 1/4 sphere at 3 m distance

(E) Eurovent certified data

(f) Air flow rate measured with clean filters

ACCESSORIES

SLW

CONTROLS	Code	Description	Model
	B0736	Wall-mounted Modbus chrono-thermostat kit	TR
	B0921	Contact touch wall-mounted thermostat kit	AR
	INDRZ	Addressing of the Modbus control kit	TR
	B0983	Condensation pump kit	NEW ≥ 1000

Accessory description on page 92

A concentration of power and design above the door

With one of the lowest sound pressure levels in the category, Bi2 Wall slim has been carefully designed to achieve one of the highest power/volume ratios on the market. This compactness allows for easy installation above the door in most situations.

The space above the door is in fact almost always unused and is therefore perfect for installing the terminal unit used for the comfort of the room.

The optional kit for condensation pump allows solving even the most complex drainage situations, where the slopes do not allow a natural discharge of the water.

Its features therefore make it the perfect terminal not only for new buildings with limited space, but also for more complex renovations with high performance demands.



Please note that optional accessories are available for purchase in conjunction with all models of the terminal. When compatibility is only possible with certain sizes or models, the information is shown in the table.

Bi2 SMART S1



Compatible with:
SIOS
CONTROL

Ultraslim fan coil units, SL and SLR versions



TOTAL FLAT DESIGN

Linear aesthetics (with bottom suction system) for maximum integration with the surrounding architecture.




FEATURES


- Air Conditions, Dehumidifies, Heats and Filters.
- Fan coil unit with integrated radiant panel (SLR version).
- Compact: Thickness min 12.9 cm - max 15 cm
- Range consisting of 5 power models (4 for the SLR version)
- Brushless DC motor
- Metal front, Smart sides in ABS
- Total Flat aesthetic with air extraction system from the bottom side
- Standard configuration with short delivery grille, symmetrical, for installation of the touch controls possible on site
- Available in the colours: White RAL 9003

LAYOUT, DIMENSIONS, WEIGHT

1. Valve with thermoelectric actuator (accessory kit)
2. Tubular radiant heating panel (SLR version)
3. High-efficiency battery
4. Water temperature probe
5. High-efficiency tangential fan
6. Condensation trap
7. Brushless DC motor inverter
8. Electronic control (accessory kit)

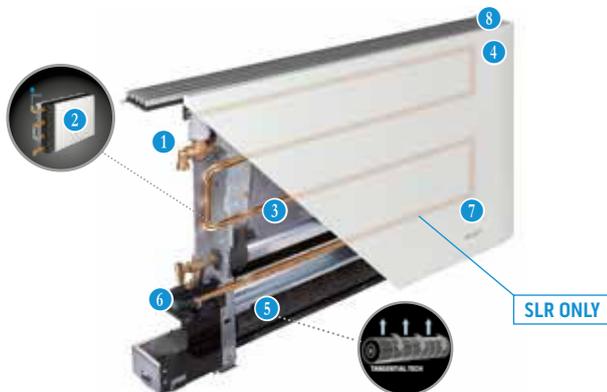

		200	400	600	800	1000
A	mm	759	959	1159	1359	1559
B	mm	579	579	579	579	579
C	mm	659	659	659	659	659
D	mm	129	129	129	129	129
E	mm	150	150	150	150	150
Weight SL	kg	11,5	13	15,5	18,5	21,5
Weight SLR	kg	13,5	15,5	19,5	22,5	-

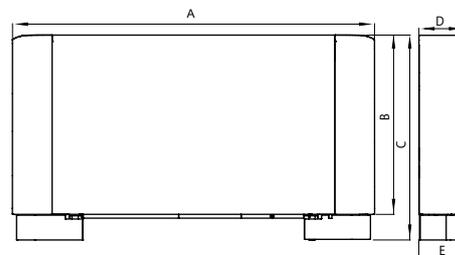

INSTALLATION

Installation floor mounted, wall mounted or (only for SL versions) ceiling-mounted.*



* Ceiling installation: kits required for ceiling installation and foot kit. Present version of foot kit specifically for ceiling installation.

TECHNICAL DATA						200			400			600			800			1000		
SL Smart S1 inverter						02122			02123			02124			02125			02126		
SLR Smart S1 inverter						02127			02128			02129			02130			-		
Fan speed						Lower	Middle	High												
Total power output in cooling mode		a27/19 - w7/12	(a)	(E)	kW	0.38	0.71	0.82	0.91	1.34	1.74	1.50	2.10	2.54	1.98	2.69	3.29	2.17	3.25	3.78
Sensitive power output in cooling mode		a27/19 - w7/12	(a)	(E)	kW	0.26	0.50	0.64	0.65	1.02	1.25	1.10	1.56	1.94	1.54	2.09	2.54	1.71	2.42	2.98
Fluid flow rate		a27/19 - w7/12	(a)		l/h	66.2	123.3	142.9	157.6	232.0	302.5	259.2	363.1	440.3	341.9	464.7	570.0	374.8	561.4	654.8
Water side head loss		a27/19 - w7/12	(a)	(E)	kPa	3.8	10.6	13.1	2.4	5.5	8.2	7.5	14.2	19	7.3	13.8	18.7	5.7	13.1	18.2
Total power output in heating mode		a20/15 - w50/-	(b)	(E)	kW	0.64	0.84	1.05	1.25	1.65	2.31	1.75	2.56	3.12	2.21	3.10	4.10	3.05	3.77	4.67
Fluid flow rate		a20/15 - w50/-	(b)		l/h	66.2	123.3	142.9	157.6	232.0	302.5	259.2	363.1	440.3	341.9	464.7	570.0	374.8	561.4	654.8
Water side head loss		a20/15 - w50/-	(b)	(E)	kPa	3.2	8.8	10.9	2.0	4.6	6.8	6.2	11.8	15.8	6.1	11.5	15.5	4.7	10.9	15.1
Total power output in heating mode		a20/15 - w45/40	(c)	(E)	kW	0.54	0.70	0.88	1.06	1.39	1.94	1.46	2.14	2.60	1.85	2.60	3.44	2.56	3.16	3.91
Fluid flow rate		a20/15 - w45/40	(c)		l/h	91.9	119.9	150.0	181.9	238.1	330.3	250.6	365.7	444.6	316.6	444.8	587.9	438.1	541.0	668.5
Water side head loss		a20/15 - w45/40	(c)	(E)	kPa	5.7	8.8	12.2	2.9	4.8	7.9	5.8	11.8	16.0	4.1	8.9	14.2	6.4	9.8	13.9
Absorbed power				(E)	W	5	7	11	6	9	19	7	11	20	8	12	24	9	14	27
Sound Power Lw (A)				(E)	dB(A)	38	45	52	39	46	53	41	47	53	42	48	54	42	48	54
Sound pressure Lp (A)			(d)		dB(A)	29	36	43	30	37	44	32	38	44	33	39	45	33	39	45
Air flow rate			(f)		m3/h	100	130	160	190	250	320	280	360	460	350	450	575	400	510	650
Battery water content					l		0.47			0.8			1.13			1.46			1.8	
Maximum operating pressure					bar		10			10			10			10			10	
Hydraulic fittings					inch		Eurocone 3/4													
Electrical power supply					V/ph/Hz		230/1/50			230/1/50			230/1/50			230/1/50			230/1/50	
SLR ONLY	Max static heating efficiency (50°C)				kW		0.37			0.42			0.5			0.62			-	
	Max static heating efficiency (70°C)				kW		0.59			0.71			0.84			1.04			-	
	Water content of the radiant panel				l		0.19			0.27			0.35			0.43			-	

The above services refer to the following operating conditions:
 (a) Cooling mode at standard conditions: air temperature 27°C b.s., 19°C b.u., water inlet temperature 7°C, water outlet temperature 12°C
 (b) Heating mode conditions of use 1: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 50°C, water flow equal to the cooling water standard condition
 (c) Heating mode standard conditions: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 45°C, water outlet temperature 40°C

(d) Sound pressure level valid for closed rooms with a volume of 100 m3 with a reverberation time of 0.5 s and installation on the floor/ceiling, sound emission on 1/4 sphere at 3 m distance
 (E) Eurovent certified data
 (f) Air flow rate measured with clean filters

ACCESSORIES

		SL	SLR
CONTROLS	B0872	On-board autonomous flat touch control kit	○ ○
	B0873	Electronic contacts/0-10V remote control kit	○ ○
	B0736	Wall-mounted Modbus chrono-thermostat kit	○ ○
	B0921	Contact touch wall-mounted thermostat kit	○ -
HYDRAULICS KIT	B0633	LH-RH connection rotation extension kit	○ ○
	B0832	2-way valve group kit with 4-wire actuator	○ ○
	B0834	3-way valve group kit with 4-wire actuator	○ ○
	B0205	Manual 2-way valve group kit	○ ○
	B0204	Manual 2-way valve insulation kit	○ ○
	B0200	Adapter connection kit for 1/2" gas thread	○ ○
	B0201	Adapter connection kit for 3/4" gas thread	○ ○
B0203	Eurokonus 90° bending connection kit	○ ○	

		SL	SLR
AESTHETIC KITS	B0938	Floor mounting bracket kit	○ ○
	B0937	Aesthetic kit feet for covering	○ ○
	B0982	Aesthetic ceiling feet kit	○ -
	B0520	Ceiling-mount kit (condensation trap)	200 -
	B0521	Ceiling-mount kit (condensation trap)	400 -
	B0522	Ceiling-mount kit (condensation trap)	600 -
	B0523	Ceiling-mount kit (condensation trap)	800 -
B0524	Ceiling-mount kit (condensation trap)	1000 -	

○ Optional accessory | - Accessory not compatible


Accessory description on page 92

Bi2 NAKED




Compatible with:
SIOS
CONTROL

Ultraslim fan coil units, SLI and SLIR versions

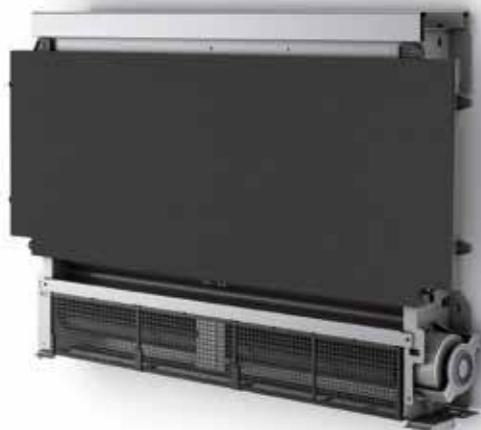

SPACE SAVING

Formwork measuring only 14.2 cm deep.



SMALL FOOTPRINT

Closing panel in metal for wall installation.



FEATURES


- Air Conditions, Dehumidifies, Heats and Filter
- Recessed version (with integrated radiant panel for the SLIR version)
- Compact: Recessed wall-mounted thickness of only 142 mm
- Range consisting of 5 models of different power
- Brushless DC motor
- SLIR version available only with hydraulic connections on the left.
- Metal closing panel available in the colours: white RAL 9003

LAYOUT, DIMENSIONS, WEIGHT



Fan coil unit

		200	400	600	800
A	mm	525	725	925	1125
B	mm	576	576	576	576
C	mm	126	126	126	126
Weight SLI	kg	7	9.5	11	14
Weight SLIR	kg	9	12	15	18

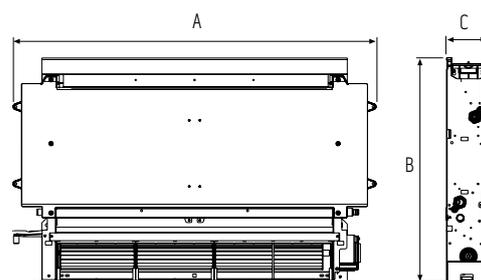

INSTALLATION

Wall with panel

Required accessories: recessed formwork and closing panel.



Wall with grilles

Required accessories: air extraction kit and insulated 90° delivery plenum (grilles and panel not supplied).



SLI ONLY



False ceiling

Required accessories: air extraction kit, telescopic top or insulated 90° delivery plenum, delivery grilles and air intake grilles with an airfoil profile.




SLI ONLY




Recessed formwork

		200	400	600	800
A	mm	713	913	1113	1313
B	mm	725	725	725	725
C	mm	142	142	142	142

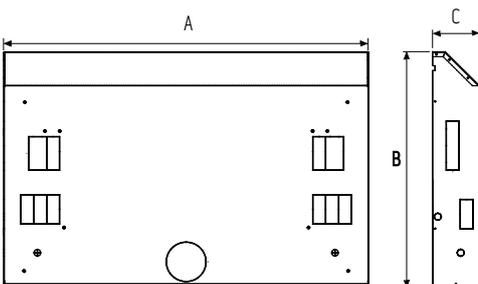

Closing panel

		200	400	600	800
A	mm	772	972	1172	1372
B	mm	754	754	754	754

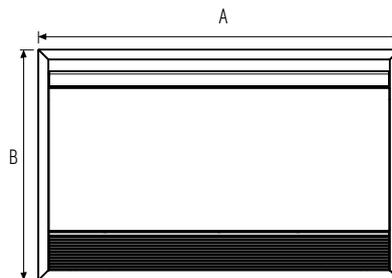

TECHNICAL DATA						200			400			600			800		
SLI inverter						01513			01514			01515			01516		
SLIR inverter						01639			01640			01641			01642		
Fan speed						Lower	Middle	High									
Total power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW		0.38	0.71	0.82	0.91	1.34	1.74	1.50	2.10	2.54	1.98	2.69	3.29
Sensitive power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW		0.26	0.50	0.64	0.65	1.02	1.25	1.10	1.56	1.94	1.54	2.09	2.54
Fluid flow rate	a27/19 - w7/12	(a)		l/h		66.2	123.3	142.9	157.6	232.0	302.5	259.2	363.1	440.3	341.9	464.7	570.0
Water side head loss	a27/19 - w7/12	(a)	(E)	kPa		3.8	10.6	13.1	2.4	5.5	8.2	7.5	14.2	19	7.3	13.8	18.7
Total power output in heating mode	a20/15 - w50/-	(b)	(E)	kW		0.64	0.84	1.05	1.25	1.65	2.31	1.75	2.56	3.12	2.21	3.10	4.10
Fluid flow rate	a20/15 - w50/-	(b)		l/h		66.2	123.3	142.9	157.6	232.0	302.5	259.2	363.1	440.3	341.9	464.7	570.0
Water side head loss	a20/15 - w50/-	(b)	(E)	kPa		3.2	8.8	10.9	2.0	4.6	6.8	6.2	11.8	15.8	6.1	11.5	15.5
Total power output in heating mode	a20/15 - w45/40	(c)	(E)	kW		0.54	0.70	0.88	1.06	1.39	1.94	1.46	2.14	2.60	1.85	2.60	3.44
Fluid flow rate	a20/15 - w45/40	(c)		l/h		91.9	119.9	150.0	181.9	238.1	330.3	250.6	365.7	444.6	316.6	444.8	587.9
Water side head loss	a20/15 - w45/40	(c)	(E)	kPa		5.7	8.8	12.2	2.9	4.8	7.9	5.8	11.8	16.0	4.1	8.9	14.2
Absorbed power			(E)	W		5	7	11	6	9	19	7	11	20	8	12	24
Sound Power Lw (A)			(E)	dB(A)		38	45	52	39	46	53	41	47	53	42	48	54
Sound pressure Lp (A)			(d)	dB(A)		29	36	43	30	37	44	32	38	44	33	39	45
Air flow rate			(f)	m ³ /h		100	130	160	190	250	320	280	360	460	350	450	575
Battery water content				l			0.47			0.8			1.13			1.46	
Maximum operating pressure				bar			10			10			10			10	
Hydraulic fittings				inch			Eurocone 3/4			Eurocone 3/4			Eurocone 3/4			Eurocone 3/4	
Electrical power supply				V/ph/Hz			230/1/50			230/1/50			230/1/50			230/1/50	
SLIR ONLY	Max static heating efficiency (50°C)			kW			0.37			0.42			0.50			0.62	
	Max static heating efficiency (70°C)			kW			0.59			0.71			0.84			1.04	
	Water content of the radiant panel			l			0.27			0.35			0.43			0.50	

The above services refer to the following operating conditions:

(a) Cooling mode at standard conditions: air temperature 27°C b.s., 19°C b.u., water inlet temperature 7°C, water outlet temperature 12°C

(b) Heating mode conditions of use 1: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 50°C, water flow equal to the cooling water standard condition

(c) Heating mode standard conditions: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 45°C,

water outlet temperature 40°C

(d) Sound pressure level valid for closed rooms with a volume of 100 m³ with a reverberation time of 0.5 s and installation on the floor/ceiling, sound emission on 1/4 sphere at 3 m distance

(e) Eurovent certified data

(f) Air flow rate measured with clean filters

ACCESSORIES

		SLI	SLIR
CONTROLS	B0872 On-board autonomous flat touch control kit	○	○
	B0873 Electronic contacts/0-10V remote control kit	○	○
	B0736 Wall-mounted Modbus chrono-thermostat kit	○	○
	B0921 Contact touch wall-mounted thermostat kit	○	—
HYDRAULICS KIT	B0633 LH-RH connection rotation extension kit	○	—
	B0832 2-way valve group kit with 4-wire actuator	○	○
	B0834 3-way valve group kit with 4-wire actuator	○	○
	B0205 Manual 2-way valve group kit	○	○
	B0204 Manual 2-way valve insulation kit	○	○
	B0200 Adapter connection kit for 1/2" gas thread	○	○
	B0201 Adapter connection kit for 3/4" gas thread	○	○
B0203 Eurokonus 90° bending connection kit	○	○	
KIT FOR RECESS WITH FORMWORK	B0568 Formwork for recessed installation	200	200
	B0569 Formwork for recessed installation	400	400
	B0570 Formwork for recessed installation	600	600
	B0571 Formwork for recessed installation	800	800
	B0950 Radiant closing panel RAL 9003	—	200
	B0951 Radiant closing panel RAL 9003	—	400
	B0952 Radiant closing panel RAL 9003	—	600
	B0953 Radiant closing panel RAL 9003	—	800
	B0955 Closing panel RAL 9003	200	—
	B0956 Closing panel RAL 9003	400	—
B0957 Closing panel RAL 9003	600	—	
B0958 Closing panel RAL 9003	800	—	

		SLI	SLIR
KIT FOR RECESS WITHOUT FORMWORK	B0550 Air delivery grille with airfoil profile	200	—
	B0551 Air delivery grille with airfoil profile	400	—
	B0552 Air delivery grille with airfoil profile	600	—
	B0553 Air delivery grille with airfoil profile	800	—
	B0559 Air intake grille with airfoil profile	200	—
	B0560 Air intake grille with airfoil profile	400	—
KIT FOR RECESS WITHOUT FORMWORK	B0561 Air intake grille with airfoil profile	600	—
	B0562 Air intake grille with airfoil profile	800	—
	B0194 Intake kit	200	—
	B0195 Intake kit	400	—
	B0196 Intake kit	600	—
	B0197 Intake kit	800	—
	B0160 Telescopic top delivery plenum	200	—
	B0161 Telescopic top delivery plenum	400	—
	B0162 Telescopic top delivery plenum	600	—
	B0163 Telescopic top delivery plenum	800	—
	B0165 Insulated 90° delivery plenum	200	—
	B0166 Insulated 90° delivery plenum	400	—
B0167 Insulated 90° delivery plenum	600	—	
B0168 Insulated 90° delivery plenum	800	—	

○ Optional accessory | — Accessory not compatible

Accessory description on page 92

Please note that optional accessories are available for purchase in conjunction with all models of the terminal. When compatibility is only possible with certain sizes or models, the information is shown in the table.



PORTABLES

MONO AND MULTISPLIT

UNICO

HRV

FAN COIL UNITS

HEAT PUMPS

BMS

Bi2 NAKED



Slim fan coil units, SLI and SLIR versions




PRO-POWER

Up to 4.85 kW of power, for larger spaces and colder climates.




SPACE SAVING

Formwork measuring only 21.7 cm deep.



SMALL FOOTPRINT

Closing panel in metal for wall installation.



FEATURES


- Air Conditions, Dehumidifies, Heats and Filter
- Recessed version (with integrated radiant panel for the SLIR version)
- Compact: Recessed wall-mounted thickness of only 217 mm
- Range consisting of 3 models of different power
- Brushless DC motor
- SLIR version available only with hydraulic connections on the left.
- Metal closing panel available in the colours: white RAL 9003

LAYOUT, DIMENSIONS, WEIGHT



Fan coil unit

		1100	1400	1600
A	mm	1110	1110	1180
B	mm	599	599	599
C	mm	198	198	198
Weight SLI	kg	17.5	18	19.5
Weight SLIR	kg	19.5	20	21

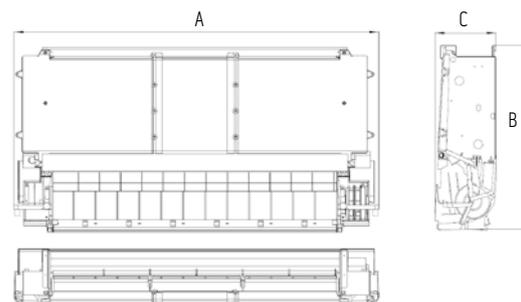

INSTALLATION


Wall with panel

Required accessories: recessed formwork and closing panel.



Wall with grilles

Required accessories: air extraction kit and insulated 90° delivery plenum (grilles and panel not supplied).



SLI ONLY



False ceiling

Required accessories: air extraction kit, telescopic top or insulated 90° delivery plenum, delivery grilles and air intake grilles with an airfoil profile.




SLI ONLY




Recessed formwork

		1100	1400	1600
A	mm	1513	1513	1513
B	mm	725	725	725
C	mm	217	217	217

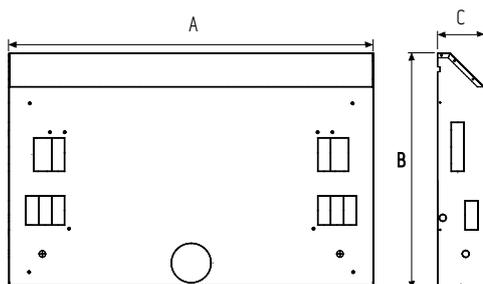

Closing panel

		1100	1400	1600
A	mm	1572	1572	1572
B	mm	754	754	754

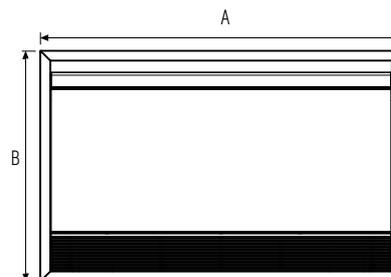

TECHNICAL DATA					1100			1400			1600		
SLI inverter					02363			02056			02057		
SLIR inverter					02364			02071			02072		
Fan speed					Lower	Middle	High	Lower	Middle	High	Lower	Middle	High
Total power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW	2.43	3.24	3.85	3.05	3.78	4.45	3.28	4.09	4.85
Sensitive power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW	1.78	2.41	2.93	2.14	2.69	3.20	2.30	2.90	3.50
Fluid flow rate	a27/19 - w7/12	(a)		l/h	417.4	557.3	664.2	525.6	652.4	769.9	565.2	706	839.2
Water side head loss	a27/19 - w7/12	(a)	(E)	kPa	13.9	23.7	32.6	19	27.8	37.2	20.9	30.8	41
Total power output in heating mode	a20/15 - w50/-	(b)	(E)	kW	2.88	4.06	4.8	3.61	4.53	5.50	3.85	4.87	5.90
Fluid flow rate	a20/15 - w50/-	(b)		l/h	417.4	557.3	664.2	525.6	652.4	769.9	565.2	706	839.2
Water side head loss	a20/15 - w50/-	(b)	(E)	kPa	12.3	21.1	29.1	16.2	23.7	31.7	19.4	28.6	35.7
Total power output in heating mode	a20/15 - w45/40	(c)	(E)	kW	2.6	3.4	4.11	3.07	3.87	4.70	3.28	4.16	5.05
Fluid flow rate	a20/15 - w45/40	(c)		l/h	449	590	712	527.1	663.4	803.9	563.1	713	863.6
Water side head loss	a20/15 - w45/40	(c)	(E)	kPa	14.3	23.5	33.3	17.1	25.8	35.5	20.2	30.8	38.8
Absorbed power			(E)	W	6	13	26	6	13	26	6	15	29
Sound Power Lw(A)			(E)	dB(A)	39	46	50	38	49	54	39	50	55
Sound pressure Lp (A)			(d)	dB(A)	30	41	46	30	41	46	31	42	47
Air flow rate			(f)	m ³ /h	460	610	765	460	610	765	490	655	820
Battery water content				l		1.94			2.33			2.5	
Maximum operating pressure				bar		10			10			10	
Hydraulic fittings				inch		Eurocone 3/4			Eurocone 3/4			Eurocone 3/4	
Electrical power supply				V/ph/Hz		230/1/50			230/1/50			230/1/50	
SLIR ONLY	Max static heating efficiency (50°C)			kW		0.45			0.45			0.5	
	Max static heating efficiency (70°C)			kW		0.8			0.8			0.9	
	Water content of the radiant panel			l		0.57			0.57			0.57	

The above services refer to the following operating conditions:

- (a) Cooling mode at standard conditions: air temperature 27°C b.s., 19°C b.u., water inlet temperature 7°C, water outlet temperature 12°C
 (b) Heating mode conditions of use 1: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 50°C, water flow equal to the cooling water standard condition
 (c) Heating mode standard conditions: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 45°C, water outlet temperature 40°C

(d) Sound pressure level valid for closed rooms with a volume of 100 m³ with a reverberation time of 0.5 s and installation on the floor/ceiling, sound emission on 1/4 sphere at 3 m distance

- (E) Eurovent certified data
 (f) Air flow rate measured with clean filters

ACCESSORIES

			SLI	SLIR
CONTROLS	B0872	On-board autonomous flat touch control kit	○	○
	B0873	Electronic contacts/0-10V remote control kit	○	○
	B0736	Wall-mounted Modbus chrono-thermostat kit	○	○
	B0921	Contact touch wall-mounted thermostat kit	○	—
HYDRAULICS KIT	B0633	LH-RH connection rotation extension kit	○	—
	B0832	2-way valve group kit with 4-wire actuator	○	○
	B0834	3-way valve group kit with 4-wire actuator	○	○
	B0205	Manual 2-way valve group kit	○	○
	B0204	Manual 2-way valve insulation kit	○	○
	B0200	Adapter connection kit for 1/2" gas thread	○	○
	B0201	Adapter connection kit for 3/4" gas thread	○	○
KIT FOR RECESS WITH FORMWORK	B0203	Eurokonus 90° bending connection kit	○	○
	B0894	Formwork for recessed installation	≥ 1100	≥ 1100
	B0954	Radiant closing panel RAL 9003	—	≥ 1100
	B0959	Closing panel RAL 9003	≥ 1100	—

		SLI	SLIR	
KIT FOR RECESS WITHOUT FORMWORK	B0880	Air delivery grille with airfoil profile	1100	—
	B0880	Air delivery grille with airfoil profile	1400	—
	B0881	Air delivery grille with airfoil profile	1600	—
	B0882	Air intake grille with airfoil profile	1100	—
	B0882	Air intake grille with airfoil profile	1400	—
	B0883	Air intake grille with airfoil profile	1600	—
	B0888	Intake kit	1100	—
	B0888	Intake kit	1400	—
	B0889	Intake kit	1600	—
	B0890	Telescopic top delivery plenum	1100	—
	B0890	Telescopic top delivery plenum	1400	—
	B0891	Telescopic top delivery plenum	1600	—
	B0892	Insulated 90° delivery plenum	1100	—
	B0892	Insulated 90° delivery plenum	1400	—
	B0893	Insulated 90° delivery plenum	1600	—

○ Optional accessory | — Accessory not compatible

Accessory description on page 92

Please note that optional accessories are available for purchase in conjunction with all models of the terminal. When compatibility is only possible with certain sizes or models, the information is shown in the table.



PORTABLES

MONO AND MULTISPLIT

UNICO

HRV

FAN COIL UNITS

HEAT PUMPS

BMS

Ci2 WALL

High-wall fan coil units



Compatible with:
SIOS
CONTROL



PRO-POWER

Maximum power 3.81 kW in cooling and 5.08 kW in heating mode.



3-WAY VALVE INCLUDED


The terminal is equipped with an integrated 3-way valve for easy installation.



FEATURES

- Air Conditioning, Dehumidifying, Heating and Filtering
- Available in two sizes
- DC brushless motor
- Equipped with a large motorised flap
- Simple installation thanks to the flexible tubes supplied
- Three-way valve
- Remote control and wall-mounting brackets
- Plastic shell
- Removable front panel for easy maintenance
- Contact for external On-Off (presence contact)
- Contact for switching on/off of the external generator with 4-wire valve actuator
- Minimum sound power only 39dB (A)

LAYOUT, DIMENSIONS, WEIGHT

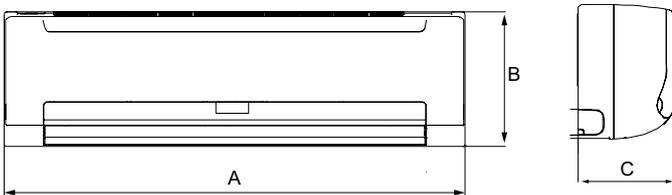

		1200	1400
A	mm	915	915
B	mm	290	290
C	mm	230	230
Weight	kg	12.7	12.7

INSTALLATION

High-wall



TECHNICAL DATA						1200			1400		
LGW Wall ST inverter						99283			99284		
Fan speed						Lower	Middle	High	Lower	Middle	High
Total power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW		2.39	2.59	2.70	2.88	3.30	3.81
Sensitive power output in cooling mode	a27/19 - w7/12	(a)	(E)	kW		1.85	2.03	2.15	2.31	2.71	3.18
Fluid flow rate	a27/19 - w7/12	(a)		l/h		412.6	447.4	466.5	497.9	571.2	661.0
Water side head loss	a27/19 - w7/12	(a)	(E)	kPa		25.4	28.6	31.6	33.0	41.2	56.8
Total power output in heating mode	a20/15 - w50/-	(b)	(E)	kW		2.63	3.03	3.29	3.77	4.33	5.08
Fluid flow rate	a20/15 - w50/-	(b)		l/h		412.6	447.4	466.5	497.9	571.2	661.0
Water side head loss	a20/15 - w50/-	(b)	(E)	kPa		26.5	30.3	32.7	30.3	37.9	51.9
Total power output in heating mode	a20/15 - w45/40	(c)	(E)	kW		1.86	2.02	2.12	3.09	3.65	4.30
Fluid flow rate	a20/15 - w45/40	(c)		l/h		442.2	479.7	503.6	528.9	624.2	733.9
Water side head loss	a20/15 - w45/40	(c)	(E)	kPa		30.2	34.9	37.5	35.7	47.5	61.9
Absorbed power			(E)	W		10	11	13	15	22	34
Sound Power Lw (A)			(E)	dB(A)		39	42	44	47	51	57
Sound pressure Lp (A)		(d)		dB(A)		30	33	35	38	42	48
Air flow rate		(f)		m ³ /h		400	454	492	590	689	825
Battery water content				l			0.5			0.5	
Maximum operating pressure				bar			16			16	
Hydraulic fittings				inch			Eurocone 3/4 F			Eurocone 3/4 F	
Electrical power supply				V/ph/Hz			220-240/1/50			220-240/1/50	
Max static heating efficiency (50°C)				kW			-			-	
Max static heating efficiency (70°C)				kW			-			-	
Water content of the radiant panel				l			-			-	

The above services refer to the following operating conditions:

(a) Cooling mode at standard conditions: air temperature 27°C b.s. 19°C b.u., water inlet temperature 7°C, water outlet temperature 12°C

(b) Heating mode conditions of use 1: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 50°C, water flow equal to the cooling water standard condition

(c) Heating mode standard conditions: air temperature 20°C b.s., 15°C b.u. max, water inlet temperature 45°C, water outlet temperature 40°C

(d) Sound pressure level valid for closed rooms with a volume of 100 m³ with a reverberation time of 0.5 s and installation on the floor/ceiling, sound emission on 1/4 sphere at 3 m distance

(E) Eurovent certified data

(f) Air flow rate measured with clean filters

ACCESSORIES

LGW

CONTROLS	Accessories	Optional
B0856	Electronic wall-mounted control kit	<input type="radio"/>

Optional accessory

Accessory description on page 92



Controls

INDRZ

Addressing of the Modbus control kit

Factory mandatory addressing of the remote control kits (TR), in case of management via Modbus connection with SiOS Control, Bticino MyHome and any other home automation/BMS system communicating in Modbus.



B0872

On-board autonomous flat touch control kit

Backlit display with desired temperature display, real-touch buttons, selection of the operating mode and ventilation speed. Command with adjustable room thermostat, operating modes (ventilation, summer, winter, automatic) and ventilation programme (silent, auto, maximum, night), minimum water probe function. It has one input for the contact presence sensor connection and two 230VAC outputs for the control of 2 solenoid valves. Through the user interface it is possible to add a correction on the read room temperature. Remote control included. Can be remotely controlled by combination of keys for connection with Modbus RS485 ASCII or RTU protocol.

Combination with B0736 command, MyHome by Bticino and SiOS Control is always possible (mandatory pairing for use with Bi2 SLI and SLIR, in this case, remote control not working). Colour RAL 9003.



Compatible with:	SL	SLR	SLI	SLIR
Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 NAKED	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

B0873

Electronic contacts/0-10V remote control kit

Electronic interface card for management and control via 0-10V analog input or contacts (for radiant fan coil units use the contact mode and check that the management system interfaced to the B0756 card supports the control logic of Olimpia Splendid radiant technology). It has a 230VAC output for control of a solenoid valve and a water probe inlet with the function of a minimum probe (for both modes of remote control). **Can be combined with B0921 contact touch wall-mounted thermostat kit (not for radiant fan coil units) or with third party home automation/BMS systems that can be interfaced to contacts or via 0-10V signal.** Colour RAL 9003.



Compatible with:	SL	SLR	SLI	SLIR
Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 NAKED	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

B0736

Wall-mounted Modbus chrono-thermostat kit

For MODBUS, RS485 connection. Up to 30 units can be controlled. Selection of the desired temperature selection, operating mode, ventilation speed, manual/chrono-thermostat mode. Ambient probe inserted in the control. Backlit LCD display. Presence sensor contact. The control is equipped with a dual insulated 230V/12 VAC power supply transformer and a backup battery. Wall mounting with hole interaxis compatible with standard 503 formwork box. **Can be combined with the controls TR, B0872 and SiOS Control.**



Compatible with:	SL	SLR	SLI	SLIR	SLW
Bi2 AIR	<input type="radio"/>				
Bi2 SMART S1	<input type="radio"/>				
Bi2 WALL	<input type="radio"/>				
Bi2 NAKED	<input type="radio"/>				

B0921

Contact touch wall-mounted thermostat kit

Digital thermostat with room probe, backlit display and touch buttons. Semi-recessed installation (15 mm out of the wall) in boxes with 60 mm round or square interaxis screws. Room temperature display, adjustment of the desired room temperature from 5°C to 35°C, setting of the "cooling" or "heating" mode, setting of the fan speed (Min/Med/Max). 230V AC power supply, it has a solenoid valve output and a water temperature probe input. **Can be paired with AR and B0873 remote control cards.**



Compatible with:	SL	SLR	SLI	SLIR	SLW
Bi2 AIR	<input type="radio"/>				
Bi2 SMART S1	<input type="radio"/>				
Bi2 WALL	<input type="radio"/>				
Bi2 NAKED	<input type="radio"/>				

B0856

Electronic wall-mounted control kit

Equipped with LCD screen, mode control, control of the fan speed and room temperature.



Compatible with:

LGW

CI2 WALL	<input type="radio"/>
----------	-----------------------

COMPATIBILITY WITH CONTROLS FROM OTHER MANUFACTURERS

To expand the control possibilities, the Olimpia Splendid terminal units are compatible with a selection of thermostats and advanced control systems, featuring wireless connections and applications for tablets and smartphones. You can consult the compatibility sheets in the download area of the Olimpiaspending.it website.

Electrical kits

B0633

LH-RH connection rotation extension kit

Electrical connection cable of the power supply and motor sensor for the installation of fan coil units in which the position of the hydraulic connection is rotated from left to right.



Compatible with:

SL SLR

SLI SLIR

Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	Bi2 NAKED	<input type="radio"/>	<input type="checkbox"/>
--------------	-----------------------	-----------------------	-----------	-----------------------	--------------------------

B0839

LH-RH connection rotation extension kit

Electrical connection cable of the power supply and motor sensor for the installations in which the position of the hydraulic connection is rotated from left to right.



Compatible with:

SL SLR

Bi2 AIR	<input type="radio"/>	<input type="radio"/>
---------	-----------------------	-----------------------

Condensation drain kit

B0983 NEW

Condensation pump kit

The optional kit for condensation pump allows solving the drain problem even where the slopes do not allow a natural discharge of the water (see details in the installation manual).



Compatible con:

SLW

Bi2 WALL	<input type="checkbox"/>	≥ 1000
----------	--------------------------	--------

Hydraulics kit

B0832 2-way valve group kit with 4-wire actuator

It consists of a valve (with thermoelectric actuator and limit switch) and a lockshield. The former allows the control of the thermal emission of the fan coil unit by intercepting the passage of the water; the lockshield allows the balancing of the load losses of the system. This kit becomes mandatory in the SLR version except in the case where a 3-way valve kit is used or if there is a manifold with thermoelectric heads. Please note: for all terminal models, if wall-mounted thermostats are not used, the installation of 2- or 3-way valves is recommended for optimal cooling operation and for the on/off of a secondary circulator or heat generator.



Compatible with:	SL	SLR	SLI	SLIR
Bi2 AIR	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 NAKED	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

B0834 3-way valve group kit with 4-wire actuator

It consists of a three-way valve switch (with thermoelectric actuator and limit switch) and a lockshield. The former allows the control of the thermal emission of the fan coil unit by intercepting the passage of the water; the lockshield allows the balancing of the load losses of the system; the by-pass maintains the circulation of the water in the system. This kit is an alternative to the 2-way solenoid valve kit (mandatory in the SLR version). Please note: for all terminal models, if wall-mounted thermostats are not used, the installation of 2- or 3-way valves is recommended for optimum cooling operation and for the on/off of a secondary circulator or heat generator.



Compatible with:	SL	SLR	SLI	SLIR
Bi2 AIR	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 NAKED	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

B0205 Manual 2-way valve group kit

It consists of a valve and a lockshield, the former allows the fan coil to be excluded from the system manually, while the lockshield allows the balancing of the system load losses. Permitted if solenoid valves on the manifold are managed by the Bi2 control kit.



Compatible with:	SL	SLR	SLI	SLIR
Bi2 AIR	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 NAKED	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

B0204 Manual 2-way valve insulation kit

Prevents condensation during the cooling operation (already included in the thermoelectric hydraulic kits).



Compatible with:	SL	SLR	SLI	SLIR
Bi2 AIR	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 NAKED	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

B0200 Adapter connection kit for 1/2" gas thread

It allows the conversion of the 3/4" Eurokonus connection of the Bi2 into a standard 1/2" gas thread connection.



Compatible with:	SL	SLR	SLI	SLIR
Bi2 AIR	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 NAKED	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

B0201 Adapter connection kit for 3/4" gas thread

It allows the conversion of the 3/4" Eurokonus connection of the Bi2 into a standard 3/4" gas thread connection.



Compatible with:	SL	SLR	SLI	SLIR
Bi2 AIR	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 NAKED	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

B0203 Eurokonus 90° bending connection kit

Facilitates connection in case of hydraulic connections with wall-mounted pipes.



Compatible with:	SL	SLR	SLI	SLIR
Bi2 AIR	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 SMART S1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Bi2 NAKED	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Optional accessory | Accessory not compatible

Please note that optional accessories are available for purchase in conjunction with all models of the terminal. When compatibility is only possible with certain sizes or models, the information is shown in the table.

Floor mounting bracket kit

Kit for support brackets and floor mounting of the fan coil unit (glass front applications or on non-load-bearing walls). It also has the function of aesthetic kit for covering (white colour RAL 9003) and is therefore not compatible with the aesthetic kit of feet for covering.



Compatible with:

		SL	SLR
B0852	Bi2 AIR	≤ 1000	≤ 1000
B0938	Bi2 SMART S1	○	○

Floor mounting bracket kit

Kit for support brackets and floor mounting of the fan coil unit (glass front applications or on non-load-bearing walls). To be used in conjunction with the B0874 kit. Increases the fan coil unit depth by 17 mm (18 mm if with back panel)



Compatible with:

		SL	SLR
B0875	Bi2 AIR	≥ 1100	≥ 1100

Aesthetic kit feet for covering

Aesthetic kit containing two feet for covering any pipes coming from the floor. Available in the colour white RAL 9003.



Compatible with:

		SL	SLR
B0853	Bi2 AIR	≤ 1000	≤ 1000
B0874	Bi2 AIR	≥ 1100	≥ 1100

		SL	SLR
B0937	Bi2 SMART S1	○	○

Aesthetic ceiling feet kit

Aesthetic kit containing two feet for covering any pipes coming from the wall. Specially designed to maximise the space available for the pipes in the case of ceiling installation. Available in white RAL 9003.



Compatible con:

		SL	SLR
B0982	Bi2 SMART S1	○	—

Back panel

In white painted sheet metal (RAL 9003), for glass front applications.



Compatible with:

		SL	SLR
B0847	Bi2 AIR	200	200
B0848	Bi2 AIR	400	400
B0849	Bi2 AIR	600	600
B0850	Bi2 AIR	800	800
B0851	Bi2 AIR	1000	1000
B0876	Bi2 AIR	1100	1100
B0876	Bi2 AIR	1400	1400
B0877	Bi2 AIR	1600	1600

Ceiling-mount kit (condensation trap)

Trap kit for the collection of the condensation in case of horizontal installation.



Compatible with:

		SL	SLR
B0520	Bi2 AIR - Bi2 SMART S1	200	—
B0521	Bi2 AIR - Bi2 SMART S1	400	—
B0522	Bi2 AIR - Bi2 SMART S1	600	—
B0523	Bi2 AIR - Bi2 SMART S1	800	—
B0524	Bi2 AIR - Bi2 SMART S1	1000	—
B0878	Bi2 AIR	1100	—
B0878	Bi2 AIR	1400	—
B0879	Bi2 AIR	1600	—

Kit for recess

Formwork for recessed installation

Frame for vertical recessed installation (to be combined with the closing panel).



Compatible with:

		SLI	SLIR
B0568	Bi2 NAKED	200	200
B0569	Bi2 NAKED	400	400
B0570	Bi2 NAKED	600	600

		SLI	SLIR
B0571	Bi2 NAKED	800	800
B0894	Bi2 NAKED	≥ 1100	≥ 1100

Radiant closing panel RAL 9003

Aesthetic panel for recessed radiant closing for vertical installation (mandatory kit, to be combined with the recessed formwork). Colour white RAL 9003.



Compatible with:

		SLI	SLIR
B0950	Bi2 NAKED	—	200
B0951	Bi2 NAKED	—	400
B0952	Bi2 NAKED	—	600

		SLI	SLIR
B0953	Bi2 NAKED	—	800
B0954	Bi2 NAKED	—	≥ 1100

Closing panel RAL 9003

Aesthetic panel for recessed closing for vertical installation (to be combined with the recessed formwork). Colour white RAL 9003.



Compatible with:

		SLI	SLIR
B0955	Bi2 NAKED	200	—
B0956	Bi2 NAKED	400	—
B0957	Bi2 NAKED	600	—

		SLI	SLIR
B0958	Bi2 NAKED	800	—
B0959	Bi2 NAKED	≥ 1100	—

Air delivery grille with airfoil profile

Kit for recessed false ceiling mounting.



Compatible with:

		SLI	SLIR
B0550	Bi2 NAKED	200	—
B0551	Bi2 NAKED	400	—
B0552	Bi2 NAKED	600	—
B0553	Bi2 NAKED	800	—

		SLI	SLIR
B0880	Bi2 NAKED	1100	—
B0880	Bi2 NAKED	1400	—
B0881	Bi2 NAKED	1600	—

Air intake grille with airfoil profile

Kit for recessed false ceiling mounting.



Compatible with:

		SLI	SLIR
B0559	Bi2 NAKED	200	—
B0560	Bi2 NAKED	400	—
B0561	Bi2 NAKED	600	—
B0562	Bi2 NAKED	800	—

		SLI	SLIR
B0882	Bi2 NAKED	1100	—
B0882	Bi2 NAKED	1400	—
B0883	Bi2 NAKED	1600	—

○ Optional accessory | — Accessory not compatible

Please note that optional accessories are available for purchase in conjunction with all models of the terminal. When compatibility is only possible with certain sizes or models, the information is shown in the table.

Intake kit

Kit for false ceiling or roof hatch mounting. Not compatible with recessed frame. Channels the intake air from the intake grille to the fan coil.




Compatible with:

		SLI	SLIR
B0194	Bi2 NAKED	200	—
B0195	Bi2 NAKED	400	—
B0196	Bi2 NAKED	600	—
B0197	Bi2 NAKED	800	—

		SLI	SLIR
B0888	Bi2 NAKED	1100	—
B0888	Bi2 NAKED	1400	—
B0889	Bi2 NAKED	1600	—

Telescopic top delivery plenum

Not compatible with recessed frame. Channels the air from the fan coil to the delivery grille.



Compatible with:

		SLI	SLIR
B0160	Bi2 NAKED	200	—
B0161	Bi2 NAKED	400	—
B0162	Bi2 NAKED	600	—
B0163	Bi2 NAKED	800	—

		SLI	SLIR
B0890	Bi2 NAKED	1100	—
B0890	Bi2 NAKED	1400	—
B0891	Bi2 NAKED	1600	—

Insulated 90° delivery plenum

Not compatible with recessed frame. Channels the air from the fan coil to the delivery grille.



Compatible with:

		SLI	SLIR
B0165	Bi2 NAKED	200	—
B0166	Bi2 NAKED	400	—
B0167	Bi2 NAKED	600	—
B0168	Bi2 NAKED	800	—

		SLI	SLIR
B0892	Bi2 NAKED	1100	—
B0892	Bi2 NAKED	1400	—
B0893	Bi2 NAKED	1600	—





SITALI

Decentralised and ducted heat recovery ventilation units



Indoor air quality. The importance of the introduction of outdoor air

Heat Recovery Ventilation: many advantages for indoor comfort

The most authoritative exponents of the scientific community agree on the importance of the introduction of outdoor air indoors, to increase the quality of indoor air. The greater the quantity of external air introduced into closed environments, the lower the concentration of pollutants and pathogens.

A change of air carried out through the opening of the windows may not always be possible (for example in summer and winter) or sufficient: the quantity of air introduced is in fact not controllable or its uniform distribution. If there are HRV systems, the experts therefore recommend activating their continuous operation (7/7 days and H24) and increasing the exchange flow rate as much as possible.





High-efficiency and comfort decentralised and centralised systems

Diversified solutions for each project

To meet the needs of every room, Olimpia Splendid's Sitali range includes both decentralised and centralised units. Recommended for existing buildings, ad hoc solutions do not require any air distribution system or invasive installation work. For buildings where it is possible to design and implement a distribution system complete with ducts and terminals, however, the installation of centralised units is recommended.

All the solutions for centralised systems include a PPE structure with sheet metal finish and plastic fittings. They are fitted with high-performance, energy-saving EC brushless motors. The centralised machines are fitted with G4 filters (ISO Coarse 60%) to protect the exchanger and for some sizes, it is possible to use F7 filters (ISO ePM1 60%) for improved air filtering on input.

Thanks to the heat recovery unit, it is possible to transfer the heat of the air extracted from inside the rooms to the fresh air supplied from the outside, limiting the activation of the heating system and improving the building's energy performance.



heat recovery ventilation

Decentralised systems

	100	150
--	-----	-----

SITALI SFE 100 S1

Continual single flow HRV



Sitali SFE 100 S1 (99231)	NEW	
---------------------------	------------	--

SITALI SF 150 S1

Alternating single-flow HRV



	Sitali SF 150 S1 (99299)
--	--------------------------

Centralised systems

	120	180	280	400	550
--	-----	-----	-----	-----	-----

SITALI CX 120

Double flow HRV with vertical ore reversible installation



	120	180	280	400	550
AUTOMATIC CONTROLS	Sitali CXRA 120 (99250)				
	Sitali CXVA 120 (99249)				

SITALI CX 180

Double flow HRV with horizontal installation



	120	180	280	400	550
AUTOMATIC CONTROLS		Sitali CXOA 180 (99248)			
MANUAL CONTROLS		Sitali CXOM 180 (99247)			

SITALI CX 280

Double flow HRV with vertical installation



	120	180	280	400	550
AUTOMATIC CONTROLS			Sitali CXVA 280 (99246)		
MANUAL CONTROLS			Sitali CXVM 280 (99245)		

SITALI CX 400

Double flow HRV with vertical installation



	120	180	280	400	550
AUTOMATIC CONTROLS				Sitali CXVA 400 (99244)	

SITALI CX 550

Double flow HRV with vertical installation



	120	180	280	400	550
AUTOMATIC CONTROLS					Sitali CXVA 550 (99243)

SITALI SFE 100 S1

1 2 3 4 5

Decentralised nomenclature

Valid for decentralised systems

- Position 1: Line name Sitali
- Position 2: Flow (SF=Single flow)
- Position 3: Type (E=Extractor)
- Position 4: Hole diameter (mm)
- Position 5: Series (S1, S2, S3 etc.)

SITALI CXRA 120

1 2 3 4 5 6

Centralised nomenclature

Valid for ducted systems

- Position 1: Line name Sitali
- Position 2: Type (C=Centralised)
- Position 3: Flow (X=Crossed)
- Position 4: Installation (R=Reversible, V=Vertical, O=Horizontal)
- Position 5: Controls (A=Automatic, M=Manual)
- Position 6: Air flow rate



BMS

HEAT PUMPS

FAN COIL UNITS

HRV

UNICO

MONO AND MULTISPLIT

PORTABLES

SITALI SF 150 S1

Compatible with:
SIOS
CONTROL

Decentralized Heat Recovery Ventilation with alternate single flow



SILENT FUNCTION

The most silent: only **10-dB (A)** Optimized for continuous 24/24h operation.



INTELLIGENT FUNCTION

Thanks to the presence of the temperature detection probe, the air flow inversion time is self-adjusted to allow the best comfort indoors.



MAGNETIC FUNCTION


Quick release via magnets for easy maintenance without the need for specialized staff.



FEATURES

- Temperature probe that adjusts the air flow inversion times to maintain the indoor comfort level
- Energy class: **A**
- EC brushless motor
- Integrated humidity sensor
- Easy maintenance, indoor magnetic release
- Infra-red remote control with LCD
- Double filter on the inner/outer side of the exchanger
- Multicolor LED indicator
- 5 ventilation speeds available
- Magnetic wall support for remote control
- ON/OFF contact
- Synchronization possible for up to 10 units (via cable connection)

DIMENSIONS AND TECHNICAL SPECIFICATIONS

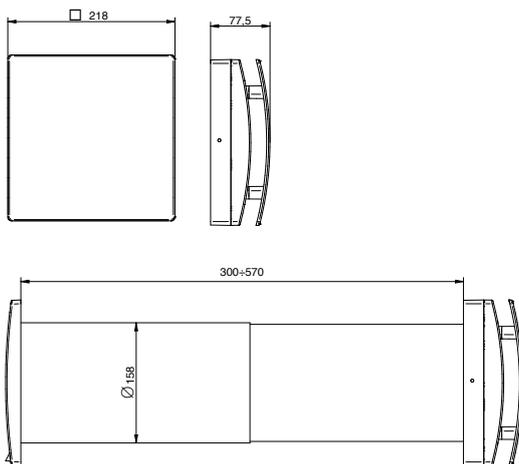


TECHNICAL DATA	SF 150 S1
PRODUCT CODE	
Hole diameter mm	160
Energy class	A
Air flow rate m ³ /h	60/50/40/30/20
Sound level* dB(A)	29/24/20/14/10
Absorption W	6/4,5/3,5/2,5/2
Max thermal efficiency	82%
Max room temperature °C	-20°C +50°C
Weight kg	5,5
Degree of protection IP	IPX4
M ² treated** m ²	20 m ²

220-240 V ~ 50-60Hz aeraulic performance measured according to ISO 5801 at 230V 50Hz, air density 1.2 Kg/m³ - data measured in TÜV Rheinland accredited laboratory

* sound pressure level at 3m in free field

**Maximum treated area for civil dwellings (regulatory reference UNI 10339:1995) considering 30 m³/h as the maximum flow rate, being of alternate flow.

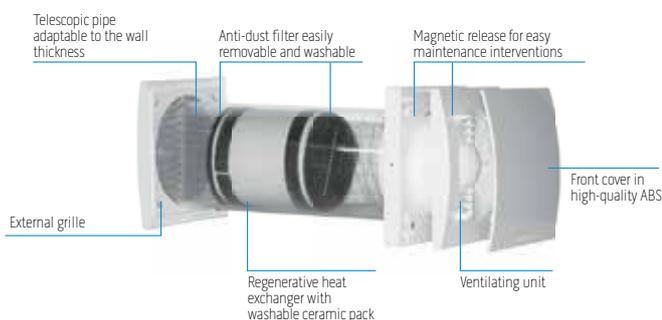

SITALI SFE 100 S1

Compatible with:
SIOS
CONTROL

Decentralized Heat Recovery Ventilation with continuous single flow.



SILENT FUNCTION

The most silent: only <math>< 9\text{dB(A)}</math>. Optimized for continuous 24/24h operation.



AIR EXCHANGE

Decentralized HRV unit with continuous single flow, $\varnothing 100$ mm, with very low energy consumption, for replacing stale air in the humid environments with maximum acoustic comfort. Ideal for preventing problems of condensation and mould, which inevitably damage the structure and compromise the health of the occupants.



HUMIDITY DETECTION


The unit is equipped with a humidity detection probe which works in automatic mode. If there is a sudden increase in the humidity rate and the relative humidity value exceeds 65% the unit works at intermediate speed and after the humidity level stabilises, it continues to work at intermediate speed for a fixed time of 5 minutes. The humidistat function can be activated via dip switch.



FEATURES

- Top quality ABS structure
- High-efficiency aerodynamic fan
- EC brushless motor with thermal protection
- Integrated humidity sensor (see manual for operation)
- Automatic timer with shutdown delay (see manual for operation).
- Elegant design with minimalist lines
- Front cover; easy to remove for cleaning, without the use of tools
- Aerodynamic deflectors
- Very low energy consumption
- 3 ventilation speeds available

DIMENSIONS AND TECHNICAL SPECIFICATIONS

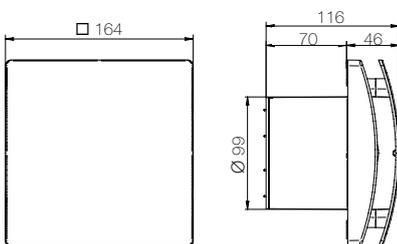

TECHNICAL DATA

PRODUCT CODE	99231
Hole diameter mm	100 (110 with telescopic tube)
Air flow rate m ³ /h	max 102 - min 17
Absorption W	max 4,5 - min 0,9
Sound level* dB(A)	max 37 - min 9
Max room temperature °C	40
Degree of protection IP (wall installation)	IPX4
Weight kg	0,6
M ² treated**	8 m ²

220-240 V ~ 50-60Hz aerulic performance measured according to ISO 5801 at 230V 50Hz, air density 1.2 Kg/m³ - data measured in TÜV Rheinland accredited laboratory
* sound pressure level at 3m in free field
**Maximum treated area for civil dwellings (regulatory reference UNI 10339:1995) considering 90 m³/h as max flow rate, 10 Pa prevalence and a room height of 2.7 m.

SITALI CX 120

Compatible with:
SIOS
CONTROL

Double flow centralised compact HRV



COMPACT DIMENSIONS

The compact size makes the units each to install in any room.



FLEXIBLE INSTALLATION

The reversible CXRA version can be installed on the wall in a vertical position, and horizontal position on the ceiling or false ceiling (the CXVA version can only be installed in the vertical position).



AUTOMATIC CONTROLS

Multi-function control panel.



FEATURES


- External panels made of pre-coated RAL 9010 and made of galvanized steel.
- Main structure made of expanded polypropylene to reduce thermal bridges, noise emission and to ensure maximum seal.
- Energy-efficient external rotor EC motors. Featuring thermal protection and mounted on ball bearings for long service life.
- Ultra-quiet and high-performance centrifugal fan with backward-curved blades coupled directly and dynamically balanced to the motor.
- Cross-flow, counterflow heat exchanger with high efficiency.
- The pre-wired unit makes electrical connection easy.
- ISO Coarse 60% (G4) filters easily removable from the outside: no need to remove the access panel to perform maintenance operations. ISO ePM1 60% (F7) filter on request.
- Integrated condensation drain.
- Automatic frost protection prevents the formation of ice on the inlet side of the heat exchanger.

OPERATION


- The unit is supplied with a multi-function control panel, with the following control and connection options:
 - 3-speed setting option (to be set during installation)
 - BOOST activation
 - Reset filter
 - On/off
 - Keypad lock
 - Anti-frost activation indicator
 - Fault indicator
 - Filter replacement indicator
 - Connection to remote room sensors (humidity, CO2, etc.)
 - Modbus interface.

LAYOUT, DIMENSIONS, WEIGHT

Sitali CXRA 120

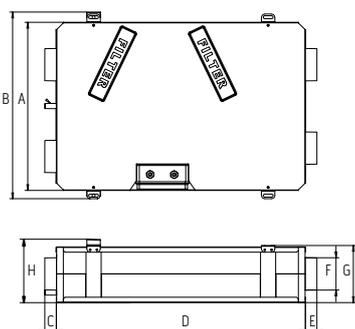

Sitali CXVA 120

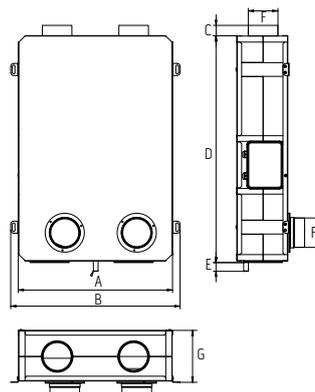


		SITALI CXRA 120	SITALI CXVA 120
A	mm	504	504
B	mm	559	553
C	mm	34	34
D	mm	741	746
E	mm	34	29
F	mm	97	97
G	mm	171	171
H	mm	190	-
Weight	kg	11,5 kg	11,5 kg


TECHNICAL DATA

		SITALI CXRA 120	SITALI CXVA 120
PRODUCT CODE		99250	99249
EAN CODE		8021183992502	8021183992496
Maximum flow rate @100 Pa	m ³ /h	91	102
Electrical power consumption (at the maximum flow rate)	W	58	58
SEC class (local demand control)		A	A
SEC class (central demand control)		A	A
SEC class (manual control - No demand control ventilation)		B	B
Thermal efficiency	%	82	82
Reference flow rate	m ³ /h	64	71
Reference pressure difference	Pa	50	50
Specific power consumption (SPI)	W/m ³ /h	0.391	0.352
Sound power level (LWA)	dB(A)	50	50
Electrical power supply		220-240V~/50-60Hz	220-240V~/50-60Hz
IP protection rating		IPX4	IPX4
Sound pressure @3m(1)	dB(A)	18	18
Max room temperature	°C	+40	+40

(1) Sound pressure level at 3m in free field, of the casing, speed 40%, indicated only for comparison purposes.

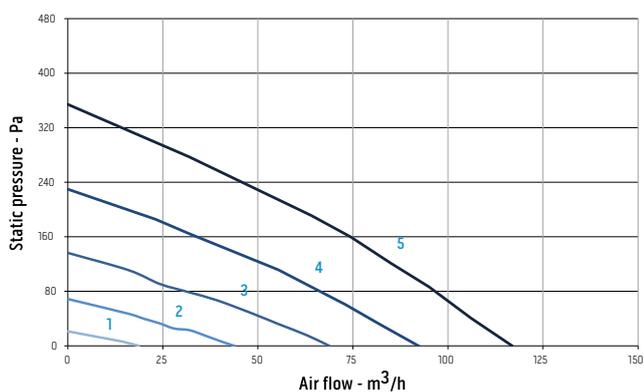SITALI CXRA 120


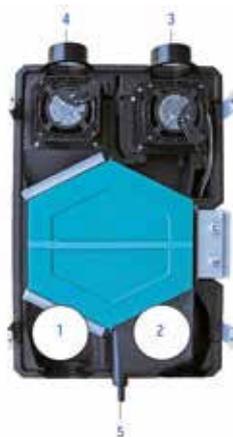
	Speed %	W max	m ³ /h max
1	20	9	22
2	40	13	48
3	60	20	71
4	80	32	96
5	100	56	114

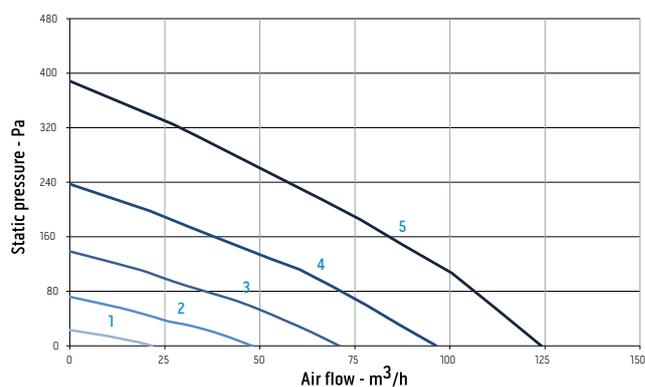SITALI CXVA 120


	Speed %	W max	m ³ /h max
1	20	9	22
2	40	13	48
3	60	20	71
4	80	32	96
5	100	58	124

Inlet curves in accordance with European regulation 1253/2014 (Er P)

Sitali CXRA 120

Sitali CXVA 120


1. Air inlet from exterior
2. Air expulsion to exterior
3. Air supplied to interior
4. Air extracted from interior
5. Condensation drain

SITALI CX 180

Double flow centralised HRV

Compatible with:
SIOS
CONTROL



INTEGRATED PHYSICAL BYPASS

Ideal for "free cooling" operation during the summer



HORIZONTAL INSTALLATION

Ideal for installation the ceiling or false ceilings, in a horizontal position.



MANUAL OR AUTOMATIC CONTROLS

Sitali COAX 180 features a multi-function control panel with LCD display (see image on the side). Sitali COVID 180 does not have controls and must be combined with an S-type control (simplified, one of codes B1061, B1062, B1063).



FEATURES

- External frame made of pre-coated RAL 9010 galvanized steel.
- Internal structure made of expanded polypropylene to reduce thermal bridges, noise emission and to ensure maximum seal.
- Energy-efficient external rotor EC motors. Featuring thermal protection and mounted on ball bearings for long service life.
- Ultra-quiet and high-performance, balanced centrifugal fan with backward-curved blades coupled directly and dynamically balanced to the motor.
- Cross-flow, counterflow heat exchanger with high efficiency.
- Simplified electrical connection: the unit is supplied pre-wired.
- ISO Coarse 60% (G4) filters easily removable from the outside: no need to remove the access panel to perform maintenance operations. ISO ePM1 60% filter (F7) on request.
- Automatic frost protection preventing ice formation on the inlet side of the heat exchanger.
- Double condensation drain that can be used based on climatic requirements.

OPERATION




Version with CX0A 180 automatic control

- 3-speed setting and selection.
- Boost function.
- Holiday and Night Mode function.
- Weekly programming.
- By-pass control
- Air flow balancing.
- Filter maintenance and fault indicator.
- Hour count indicator
- Settings savings and uploading.
- Connection to remote room sensors (humidity, CO2, etc.)
- ModBus interface.
- Connection to electric heating element before and after the ventilation unit.
- Connection to water heating coil

Version with COVID 180 manual control

- Three-speed operation with simplified external S-type control, which also allows manual activation of the bypass.

LAYOUT, DIMENSIONS, WEIGHT

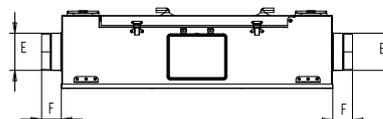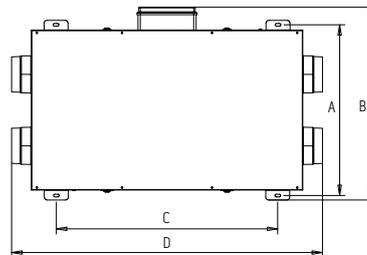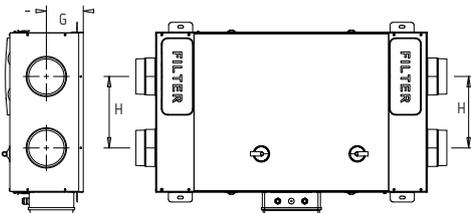


		SITALI CX0A 180	SITALI CX0M 180
A	mm	574	574
B	mm	648	648
C	mm	738	738
D	mm	1037	1037
E	mm	125	125
F	mm	66	66
G	mm	123	123
H	mm	240	240
I	mm	270	270
Weight	kg	20 kg	20 kg

TECHNICAL DATA

		SITALI CXOA 180	SITALI CXOM 180
PRODUCT CODE		99248	99247
EAN CODE		8021183992489	8021183992472
Maximum flow rate @100 Pa	m3/h	177	177
Electrical power consumption (at the maximum flow rate)	W	105	105
SEC class (local demand control)		A	A
SEC class (central demand control)		A	A
SEC class (manual control - No demand control ventilation)		B	B
Thermal efficiency	%	82	82
Reference flow rate	m3/h	124	124
Reference pressure difference	Pa	50	50
Specific power consumption (SPI)	W/m3/h	0.412	0.412
Sound power level (LWA)	dB(A)	50	50
Electrical power supply		220-240V~/50-60Hz	220-240V~/50-60Hz
IP protection rating		IPX4	IPX4
Sound pressure @3m(1)	dB(A)	21	21
Max room temperature	°C	+40	+40


(1) Sound pressure level at 3m in free field, of the casing, speed 40%, indicated only for comparison purposes.

SITALI CXOA 180

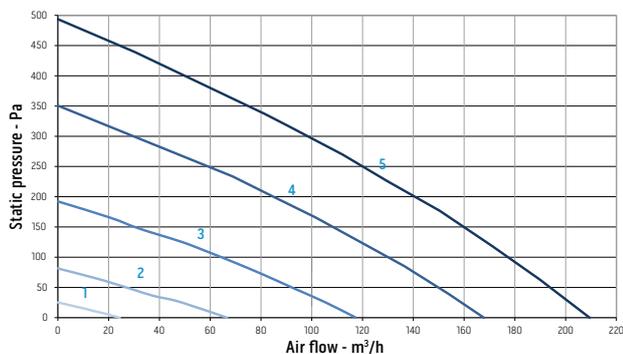


	Speed %	W max	m³/h max
1	20	10	24
2	40	18	67
3	60	36	117
4	80	77	178
5	100	105	209


SITALI CXOM 180

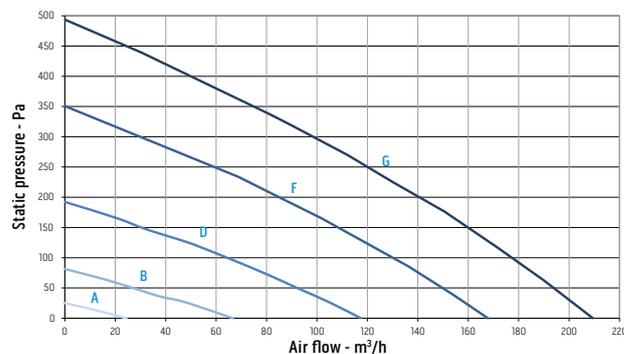

Trimmer Position	Speed %	W max	m³/h max
A	20	10	24
B	40	18	67
C	53	28	100
D	60	36	117
E	70	47	139
F	80	68	168
G	100	105	209



Inlet curves in accordance with European regulation 1253/2014 (Er P)

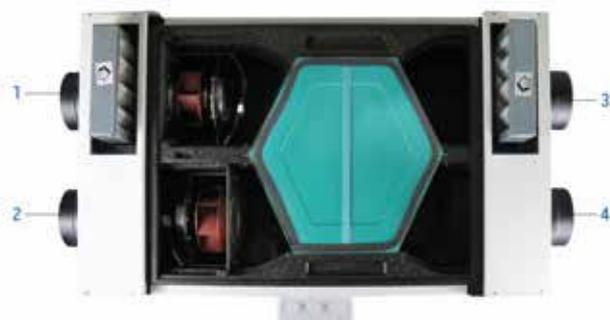

1. Air inlet from exterior
2. Air expulsion to exterior
3. Air supplied to interior
4. Air extracted from interior (Winter condensation drain) (Summer condensation drain)

SITALI CX 280

Double flow centralised HRV

Compatible with:
SiOS
CONTROL



INTEGRATED PHYSICAL BYPASS

Ideal for "free cooling" operation during the summer



VERTICAL INSTALLATION

Suitable for wall installation in a vertical position.



MANUAL OR AUTOMATIC CONTROLS

Sitali CXVA 280 features a multi-function control panel with LCD display (see image on the side). Sitali CXVM 280 does not have controls and must be combined with an S-type control (simplified, one of codes B1061, B1062, B1063).



FEATURES

- External frame made of pre-coated RAL 9010 galvanized steel.
- Internal structure made of expanded polypropylene to reduce thermal bridges, noise emission and to ensure maximum seal.
- Energy-efficient external rotor EC motors. Featuring thermal protection and mounted on long-lasting ball bearings.
- Ultra-quiet and high-performance, balanced centrifugal fan with backward-curved blades coupled directly and dynamically balanced to the motor.
- Cross-flow, counterflow heat exchanger with high efficiency.
- Simplified electrical connection: the unit is supplied pre-wired.
- Removable front panel for access to the filters and exchanger.
- Supplied with easily removable ISO Coarse 60% (G4) filters. ISO ePM1 55% filter (F7) on request.
- Automatic frost protection preventing ice formation on the inlet side of the heat exchanger.
- Double condensation drain that can be used based on climatic requirements.
- Left or right configuration for flexible installation

OPERATION


Version with CXVA 280 automatic control

- 3-speed setting and selection.
- Boost function.
- Holiday and Night Mode function.
- Weekly programming.
- By-pass control
- Air flow balancing.
- Filter maintenance and fault indicator.
- Hour count indicator
- Settings savings and uploading.
- Connection to remote room sensors (humidity, CO2, etc.)
- ModBus interface.
- Connection to electric heating element before and after the ventilation unit.
- Connection to water heating coil

Version with CXVM 280 manual control

- Three-speed operation with simplified external S-type control, which also allows manual activation of the bypass.

LAYOUT, DIMENSIONS, WEIGHT

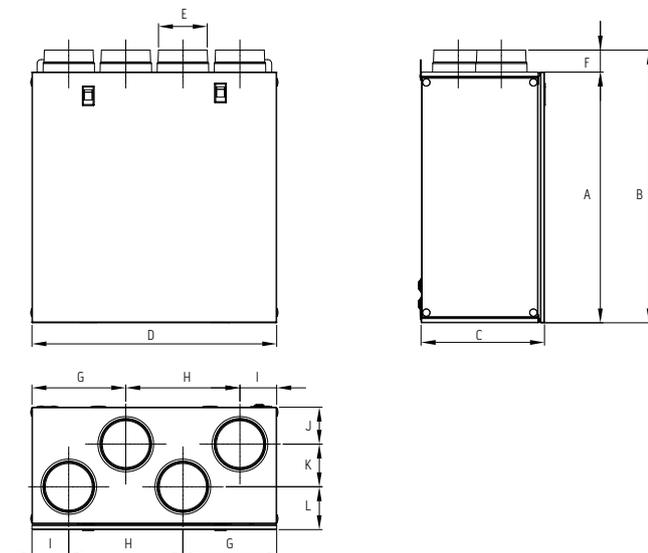


		SITALI CXVA 280	SITALI CXVM 280
A	mm	610	610
B	mm	665	665
C	mm	298	298
D	mm	592	592
E	mm	125	125
F	mm	55	55
G	mm	227	227
H	mm	276	276
I	mm	89	89
J	mm	90	90
K	mm	104	104
L	mm	104	104
Weight	kg	21,4 kg	23 kg


TECHNICAL DATA

		SITALI CXVA 280	SITALI CXVM 280
PRODUCT CODE		99246	99245
EAN CODE		8021183992465	8021183992458
Maximum flow rate @100 Pa	m ³ /h	256	256
Electrical power consumption (at the maximum flow rate)	W	160	160
SEC class (local demand control)		A	A
SEC class (central demand control)		A	A
SEC class (manual control - No demand control ventilation)		B	B
Thermal efficiency	%	83	83
Reference flow rate	m ³ /h	179	179
Reference pressure difference	Pa	50	50
Specific power consumption (SPI)	W/m ³ /h	0.385	0.385
Sound power level (LWA)	dB(A)	56	56
Electrical power supply		220-240V~/50-60Hz	220-240V~/50-60Hz
IP protection rating		IPX2	IPX2
Sound pressure @3m(1)	dB(A)	27	27
Max room temperature	°C	+40	+40


(1) Sound pressure level at 3m in free field, of the casing, speed 40%, indicated only for comparison purposes.

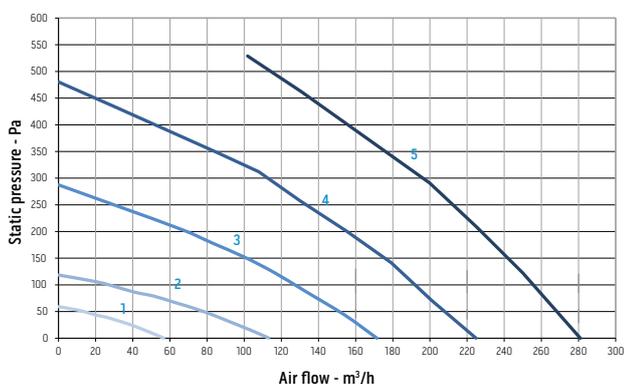SITALI CXVA 280


	Speed %	W max	m ³ /h max
1	20	13	57
2	40	25	113
3	60	51	172
4	80	98	225
5	100	167	281

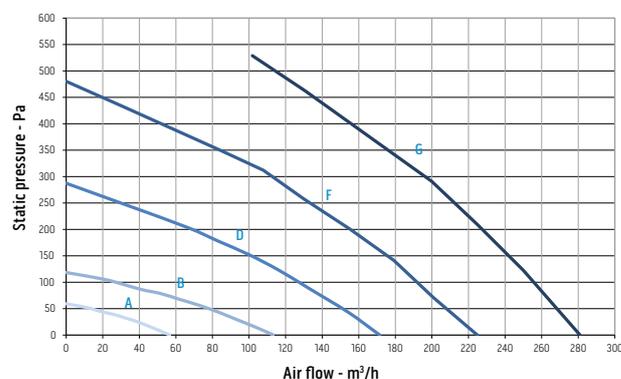SITALI CXVM 280


Trimmer Position	Speed %	W max	m ³ /h max
A	20	13	57
B	40	17	88
C	53	25	113
D	60	41	153
E	70	51	172
F	80	100	225
G	100	167	281



Inlet curves in accordance with European regulation 1253/2014 (Er P)



1. Air expulsion to exterior
 2. Air inlet from exterior
 3. Air extracted from interior
 4. Air supplied to interior
(Winter condensation drain)
(Summer condensation drain)
- LH flow direction

SITALI CX 400

Double flow centralised HRV

Compatible with:
SIOS
CONTROL



INTEGRATED PHYSICAL BYPASS

Ideal for "free cooling" operation during the summer



VERTICAL INSTALLATION

Suitable for wall installation in a vertical position.



AUTOMATIC CONTROL

The unit is supplied with a multi-function control panel and LCD display.




FEATURES

- External frame made of pre-coated RAL 9010 galvanized steel.
- Internal structure made of expanded polypropylene to reduce thermal bridges, noise emission and to ensure maximum seal.
- Energy-efficient external rotor EC motors. Featuring thermal protection and mounted on ball bearings for long service life.
- Ultra-quiet and high-performance, balanced centrifugal fan with backward-curved blades coupled directly and dynamically balanced to the motor.
- Cross-flow, counterflow heat exchanger with high efficiency.
- Simplified electrical connection: the unit is supplied pre-wired.
- ISO Coarse 60% (G4) filters easily removable from the outside. The unit is also fitted with an ISO ePM1 60% filter (F7) on the air inlet.
- Automatic frost protection preventing ice formation on the inlet side of the heat exchanger.
- Double condensation drain that can be used based on climatic requirements.
- Left or right configuration for flexible installation

OPERATION

- 3-speed setting.
- Boost function.
- Holiday and Night Mode function.
- Weekly programming.
- Bypass control.
- Air flow balancing.
- Filter maintenance and fault indicator.
- Operating hours counter.
- Settings saving and upload.
- Connection of remote room sensors (humidity, CO2, etc.)
- ModBus interface.
- Connection to electric heating element before and after the ventilation unit.
- Water coil connection for heating.

LAYOUT, DIMENSIONS, WEIGHT

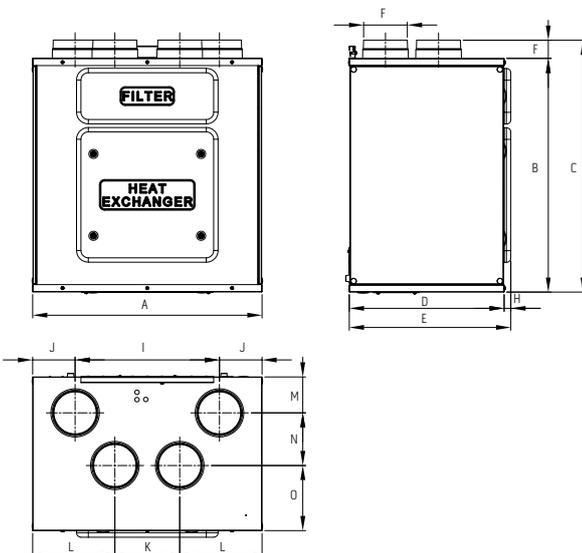


		SITALI CXVA 400
A	mm	778
B	mm	799
C	mm	860
D	mm	525
E	mm	549
F	mm	148
G	mm	62
H	mm	23
I	mm	490
J	mm	144
K	mm	220
L	mm	279
M	mm	1225
N	mm	180
O	mm	222.5
Weight	kg	34,5 kg

TECHNICAL DATA
SITALI CXVA 400

PRODUCT CODE	99244	
EAN CODE	8021183992441	
Maximum flow rate @100 Pa	m ³ /h	363
Electrical power consumption (at the maximum flow rate)	W	160
SEC class (local demand control)		A+
SEC class (central demand control)		A
SEC class (manual control - No demand control ventilation)		A
Thermal efficiency	%	86
Reference flow rate	m ³ /h	254
Reference pressure difference	Pa	50
Specific power consumption (SPI)	W/m ³ /h	0.268
Sound power level (LWA)	dB(A)	52
Electrical power supply		220-240V~/50-60Hz
IP protection rating		IPX4
Sound pressure @3m(1)	dB(A)	26
Max room temperature	°C	+40

(1) Sound pressure level at 3m in free field, of the casing, speed 40%, indicated only for comparison purposes.

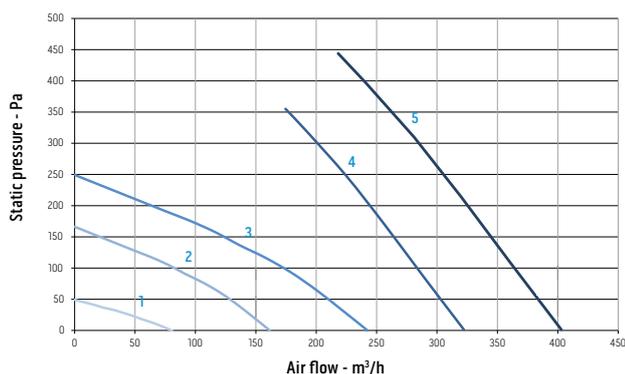SITALI CXVA 400


	Speed %	W max	m ³ /h max
1	20	10	84
2	40	22	162
3	60	48	243
4	80	90	322
5	100	160	403

Inlet curves in accordance with European regulation 1253/2014 (Er P)



1. Air expulsion to exterior
 2. Air inlet from exterior
 3. Air supplied to interior
 4. Air extracted from interior
(Winter condensation drain)
(Summer condensation drain)
- LH flow direction

SITALI CX 550

Double flow centralised HRV

Compatible with:
SiOS
CONTROL



INTEGRATED PHYSICAL BYPASS

Ideal for "free cooling" operation during the summer



VERTICAL INSTALLATION

Suitable for wall installation in a vertical position.



AUTOMATIC CONTROL

The unit is supplied with a multi-function control panel and LCD display.




FEATURES

- External frame made of pre-coated RAL 9010 galvanized steel.
- Internal structure made of expanded polypropylene to reduce thermal bridges, noise emission and to ensure maximum seal.
- Energy-efficient external rotor EC motors. Featuring thermal protection and mounted on long-lasting ball bearings.
- Ultra-quiet and high-performance, balanced centrifugal fan with backward-curved blades coupled directly and dynamically balanced to the motor.
- Cross-flow, counterflow heat exchanger with high efficiency.
- Simplified electrical connection: the unit is supplied pre-wired.
- Removable front panel for access to the filters and exchanger.
- Supplied with ISO Coarse 60% (G4) filters that can be easily removed from the outside. The unit is also fitted with an ISO ePM1 60% filter (F7) on the air inlet.
- Automatic frost protection preventing ice formation on the inlet side of the heat exchanger.
- Double condensation drain that can be used based on climatic requirements.
- Left or right configuration for flexible installation

OPERATION

- 3-speed setting.
- Boost function.
- Holiday and Night Mode function.
- Weekly programming.
- Bypass control.
- Air flow balancing.
- Filter maintenance and fault indicator.
- Operating hours counter.
- Settings saving and upload.
- Connection of remote room sensors (humidity, CO2, etc.)
- ModBus interface.
- Connection to electric heating element before and after the ventilation unit.
- Water coil connection for heating.

LAYOUT, DIMENSIONS, WEIGHT

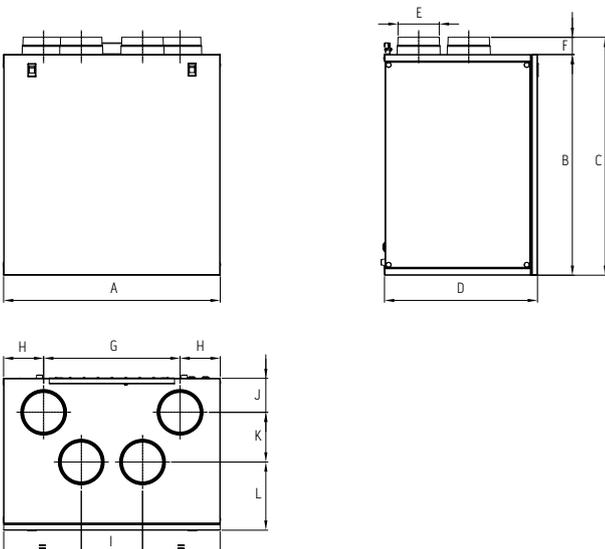


		SITALI CXVA 550
A	mm	778
B	mm	799
C	mm	860
D	mm	549
E	mm	148
F	mm	62
G	mm	490
H	mm	144
I	mm	220
J	mm	122.5
K	mm	180
L	mm	246.5
Weight	kg	44 kg

TECHNICAL DATA
SITALI CXVA 550

PRODUCT CODE		99243
EAN CODE		8021183992434
Maximum flow rate @100 Pa	m ³ /h	520
Electrical power consumption (at the maximum flow rate)	W	333
SEC class (local demand control)		A
SEC class (central demand control)		A
SEC class (manual control - No demand control ventilation)		B
Thermal efficiency	%	82
Reference flow rate	m ³ /h	364
Reference pressure difference	Pa	50
Specific power consumption (SPI)	W/m ³ /h	0.412
Sound power level (LWA)	dB(A)	58
Electrical power supply		220-240V~ /50-60Hz
IP protection rating		IPX4
Sound pressure @3m(1)	dB(A)	34
Max room temperature	°C	+40

(1) Sound pressure level at 3m in free field, of the casing, speed 40%, indicated only for comparison purposes.

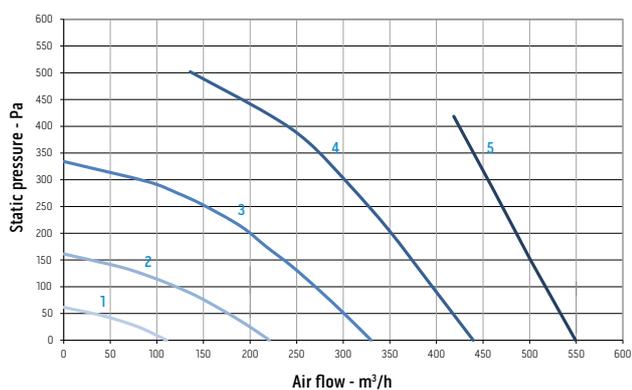SITALI CXVA 550


	Speed %	W max	m ³ /h max
1	20	17	110
2	40	44	221
3	60	110	330
4	80	264	440
5	100	333	550

Inlet curves in accordance with European regulation 1253/2014 (Er P)



1. Air expulsion to exterior
 2. Air inlet from exterior
 3. Air supplied to interior
 4. Air extracted from interior (Winter condensation drain) (Summer condensation drain)
- LH flow direction

Decentralized HRV accessories



Download
Additional
information on
these accessories

B0838

External grille

High-quality ABS fixed external grille, resistant to impacts and UV rays. Colour RAL 9010. Diameter 100mm. Compatible with Sitali SFE 100.



B0837

Telescopic pipe

PVC telescopic pipe which adapts to the thickness of the wall. Diameter 100mm. Compatible with Sitali SFE 100.



B1119

Terminal unit 150 Silent

"Dnew 45dB), designed to reduce noise coming from outside. Suitable for particularly windy outdoor conditions. Made of RAL9010 pre-painted aluminium sheet, equipped with fireproof sound-absorbing mat, front inspection panel, drip trap and anti-insect net. Possibility of semi-recessed installation as well. Compatible with Sitali SF 150 S1.



Centralised HRV accessories

External air distribution

ABS ext grille

High-quality ABS fixed external grille, resistant to impacts and UV rays. Colour RAL 9010.



B1065	Diameter 100mm
B1066	Diameter 125mm
B1067	Diameter 150mm

Flex ALU ISO

Flexible pipe, 10m in length, made with aluminium/polyester/micro-perforated aluminium walls for air passage noise reduction and steel concertina wire. Polyester fibre thermal insulation coating (thickness 25mm/16kg/m³) and aluminium-coated polyolefin film outer protection.



B1068	Diameter 127mm
B1069	Diameter 160mm

Wall passage

Wall penetration kit with external terminal in galvanised sheet metal coated in RAL 9010 and fitted with sound-absorbing mat.



B1074	Diameter 125mm
B1075	Diameter 150mm

Telescopic pipe

PVC telescopic pipes which adapt to the thickness of the wall. (L=300-570 mm).



B1103	Diameter 100mm
B1104	Diameter 125mm
B1105	Diameter 150mm

EPE pipe

Insulated and soundproofed EPE pipe, with smooth interior and exterior; length 2m.



B1110	DN125 L=2m
B1114	DN150 L=2m

EPE 90 bend

Insulated and soundproofed EPE bend, with smooth interior and exterior.

B1111	DN125
B1115	DN150



EPE coupling

Coupling for connecting EPE pipe/EPE pipe, EPE pipe/EPE 90 bend.

B1112	DN125
B1116	DN150



EPE collar

Bracket collar and for connection of the EPE/ventilation unit pipe and EPE pipe/distribution plenum.

B1113	DN125
B1117	DN150



Internal air distribution

E-I designer vent

Extraction/inlet vent with flow rate adjustment module; front cover made of high-quality ABS; white RAL 9010. The adjustment module consists of removable concentric circles to define the desired volume of air.

B1058	Diameter 80mm
B1055	Diameter 100mm
B1056	Diameter 125mm
B1057	Diameter 150mm



FT-WHITE grille

Rectangular steel grille pre-coated in RAL 9010 white, with round perforated screen and magnetic attachment system.

B1070	Dimension 200x100mm
B1072	Dimension 300x100mm



FT-METAL grille

Rectangular steel grille with metallic finish, round perforated screen and magnetic attachment system.

B1071	Dimension 200x100mm
B1073	Dimension 300x100mm



B1059 Flex HDPE 75/63

Flexible 75/63 pipe with antimicrobial, antibacterial and antistatic treatment, made with high-density double polyethylene wall; corrugated on the outside and smooth on the inside; supplied with end caps; used to channel the air from the distribution plenum to the air inlet and extraction vents. Suitable for installation in concrete slab, false ceilings or on walls. Length 50 m.



B1054 FLEX HDPE 75/63 90° adaptor

90° angle adaptor, Ø125mm with 2 attachments Ø80mm (for Flex HDPE 75/63 duct), including 2 protection/end caps, length 250mm. Suitable for designer vents with 125mm diameter and extraction/inlet valves.



FLEX HDPE 75/63 hooks

Connection kit for Flex HDPE 75/63 pipe to make worksite installation easier. Available in packs of 12 in red or blue to identify the air flow direction.



B1076	Blue
B1077	Red

B1078 FLEX HDPE 75/63 90° bend

90° bend kit for Flex HDPE 75/63 pipe with sealing rings included.

**B1087 FLEX HDPE 75/63 coupling**

Coupling kit for Flex HDPE 75/63 pipe with sealing rings included.

**B1088 O-Ring FLEX HDPE 75/63**

O-ring kit for Flex HDPE 75/63 pipe (pack of 10).

**B1095 Plenum P Ø125mm - 4 outlets (for Flex HDPE)**

Distribution plenum, 1 inlet Ø125mm, 4 outlets Ø80mm (for Flex HDPE 75/63 duct) and 5 protection/end caps supplied.

**B1096 Plenum P Ø125mm - 6 outlets (for Flex HDPE)**

Distribution plenum, 1 inlet Ø125mm, 6 outlets Ø80mm (for Flex HDPE 75/63 duct) and 7 protection/end caps supplied.

**B1094 Plenum P Ø125mm - 10 outlets (for Flex HDPE)**

Distribution plenum, 1 inlet Ø125mm, 10 outlets Ø80mm (for Flex HDPE 75/63 duct) and 11 protection/end caps supplied.

**B1098 Plenum P Ø150mm - 10 outlets (for Flex HDPE)**

Distribution plenum, 1 inlet Ø150mm, 10 outlets Ø80mm (for Flex HDPE 75/63 duct) and 11 protection/end caps supplied.

**B1099 Plenum P Ø150mm - 15 outlets (for Flex HDPE)**

Distribution plenum, 1 inlet Ø150mm, 15 outlets Ø80mm (for Flex HDPE 75/63 duct) and 16 protection/end caps supplied.

**B1092 Plenum L 200x100mm - 1 coupling (for Flex HDPE)**

Inlet/extraction plenum, 1 fitting on the long side Ø80mm, complete with anti-mortar closure and 1 cap (for Flex HDPE 75/63 duct). Air flow adjustment via the CAL80 damper (on request).

**B1093 Plenum L 300x100mm - 2 couplings (for Flex HDPE)**

Inlet/extraction plenum, 2 fittings on the long side Ø80mm, complete with anti-mortar closure and 2 caps (for Flex HDPE 75/63 duct). Air flow adjustment via the CAL80 damper (on request).



B1101**Plenum P 200x100mm - 1 coupling (for Flex HDPE)**

Inlet/extraction plenum, 1 rear fitting Ø80mm, complete with anti-mortar closure and 1 cap (for Flex HDPE 75/63 duct). Air flow adjustment via the CAL80 damper (on request).

**B1102****Plenum P 300x100mm - 2 couplings (for Flex HDPE)**

Inlet/extraction plenum, 2 fittings on the rear Ø80mm, complete with anti-mortar closure and 2 caps (for Flex HDPE 75/63 duct). Air flow adjustment via the CAL80 damper (on request).

**B1091****Plenum LCS 200x100mm - 1 coupling (for Flex HDPE)**

Inlet/extraction plenum, 1 fitting on the short side Ø80mm, complete with anti-mortar closure and 1 cap (for Flex HDPE 75/63 duct).

**B1089****Plenum L 140x140mm - 1 coupling (for Flex HDPE)**

Inlet/extraction plenum with 1 side coupling Ø80mm (for HDPE 75/63). Including anti-mortar closure and 1 protection/end cap. Dimension 140x140mm. Suitable for designer vents measuring 80 and 100mm in diameter.

**B1090****Plenum L 200x200mm - 2 couplings (for Flex HDPE)**

Inlet/extraction plenum with 2 side couplings Ø80mm (for HDPE 75/63). Including anti-mortar closure and 2 protection/end caps. Dimension 200x200mm. Suitable for designer vents measuring 125 and 150mm in diameter.

**B1097****Plenum P 140x140mm - 1 coupling (for Flex HDPE)**

Inlet/extraction plenum with 1 rear coupling Ø80mm (for HDPE 75/63). Including anti-mortar closure and 1 protection/end cap. Suitable for designer vents measuring 80 and 100mm in diameter.

**B1100****Plenum P 200x200mm - 2 couplings (for Flex HDPE)**

Inlet/extraction plenum with 2 rear couplings Ø80mm (for HDPE 75/63). Including anti-mortar closure and 2 protection/end caps. Suitable for designer vents measuring 125 and 150mm in diameter.

**B1106****CAL80 damper**

Flow rate regulator damper, designed to be attached to the vents Ø80mm of the inlet/extraction plenum or distribution plenum, made of polypropylene, with quick-fit system, including wing-shaped fins to ensure maximum acoustic comfort. Pack of three.

**B1107****METAL EST 125 valve**

Valid for extraction in RAL 9010 coated steel, Ø125mm, manually and progressively adjustable.

**B1108****PP EST-MM 125 valve**

Valid for extraction/inlet in white PP, Ø125mm, manually and progressively adjustable.

**B1109****METAL IMM 125 valve**

Valid for inlet in RAL 9010 coated steel, Ø125mm, manually and progressively adjustable.



Remote controls

B1061

Control-S 2 recessed modules

Remote control for HRV unit with heat recovery, including 3 switches. Option to select 3 speeds and enable free-cooling mode. 230V~ 50/60Hz.



B1062

Control-S 3 recessed modules

Remote control for HRV unit with heat recovery, including 3 switches. Option to select 3 speeds and enable free-cooling mode. 230V~ 50/60Hz. Version for recessed installation with 3 modules suitable for box 503.



B1063

Control-S wall installation

Remote control for HRV unit with heat recovery, including 3 switches. Option to select 3 speeds and enable free-cooling mode. 230V~ 50/60Hz.



Other accessories

B1060

F7 filter box

External cassette including F7 filter with galvanised metal sheet pre-coated with RAL 9010 and attachment with 125mm attachment. Suitable for CX 120, CX180 and CX28



F7 filters

Class F7 filtration elements (pack of 1 item).



B1079	For Sitali CX 120
B1081	For Sitali CX 180
B1083	For Sitali CX 280
B1085	For Sitali CX 400-550

G4 filters

Class G4 filtration elements (pack of 2 items).



B1080	For Sitali CX 120
B1082	For Sitali CX 180
B1084	For Sitali CX 280
B1086	For Sitali CX 400 - 550



PORTABLES

MONO AND MULTISPLIT

UNICO

HRV

FAN COIL UNITS

HEAT PUMPS

BMS



AIR CONDITIONING





UNICO

Air conditioners and air-to-air
heat pumps without outdoor unit



A unique product. Also for production technology

Patented in 1998 by Olimpia Splendid and produced, still today, in Italy, with the use of new natural, low-GWP and reclaimed refrigerants

A cutting-edge production pavilion

Since 1998 Unico has been produced in Italy, in the Olimpia Splendid factory, located in Brescia. A long story that details the important technological know-how acquired by the company in the production of air conditioners without outdoor units. An experience that has now been further enhanced, giving life to a cutting-edge production pavilion in the world of residential air conditioning, powered by 100 percent electricity from renewable sources and equipped with automated multi-gas lines-designed to safely handle low-GWP refrigerants.

Natural, low GWP and regenerated coolant gases

First residential air conditioner with 100% reclaimed gas, today Unico is also the first air conditioner without outdoor unit produced in Italy with R290 and R32 gas. The conversion to new refrigerants is for Olimpia Splendid a concrete commitment, taken personally, to be an active part in the creation of more sustainable home comfort solutions.





BMS

HEAT PUMPS

FAN COIL UNITS

HRV

UNICO

MONO AND MULTISPLIT

PORTABLES

The widest and most diversified range

Up to 3.5 kW of power. With different aesthetics, to meet every air conditioning need with a unique product



Behind the range, a project

2 types of motors, 4 different refrigerant gases and multiple power sizes. The Unico range is the widest and most diversified on the market today, designed to meet the different installation needs - residential and commercial - with a specific solution: unique.

Behind every design, an Italian signature

The collaboration between Olimpia Splendid and Italian designers - emerging or world-famous - has deep roots. The first design of Unico by King & Miranda was in 1998: an iconic product that inspired, in the following years, the projects of other important Italian brands: Sara Ferrari, Matteo Thun and Antonio Rodriguez, Ercoli+Garlandini and Newtone. An internationally awarded design recognised by the most prestigious competitions in the sector.

Air conditioners and heat pumps without an outdoor unit

		<2.0 kW	2.1÷2.5 kW
UNICO EVO The quietest 	INVERTER VERSION	Unico Evo 20 HP PVAN (02453)* A+	Unico Evo 25 HP PVAN (02455)* A
UNICO AIR The slimmest 	ON/OFF VERSION	Unico Air 8 SF (01503)	
		Unico Air 8 HP (01504)	
		A	
	INVERTER VERSION	Unico Air 20 SF EVA (02112)*	
	Unico Air 20 HP EVA (02111)*	Unico Air 25 HP EVA (02095)*	
	A	A	
UNICO EDGE The most versatile 	ON/OFF VERSION		
	INVERTER VERSION		
UNICO PRO The most powerful 	INVERTER VERSION		

Energy efficiency classes in cooling, outdoor ambient temperature DB 35°C / WB 24°C; indoor room temperature DB 27°C / WB 19°C.



2.6÷3.0 kW	3.1÷3.5 kW

Unico Edge 30 SF RFA (02132)*	
Unico Edge 30 HP RFA (02133)*	

A

Unico Edge 30 SF EVA (02116)*	
Unico Edge 30 HP EVA (02115)*	

A



Unico Pro 30HP EVAN (02238)*	NEW	Unico Pro 35HP EVAN (02239)*	NEW
A+		A	



UNICO EVO 20 HP PVAN

1 2 3 4 5 6 7 8

New nomenclature

Valid for products marked with *

Position 1: Unique line name

Position 2: Range Name (EVO, AIR, EDGE, PRO, TOWER)

Position 3: Size (20, 25, 30, 35)

20=Class up to 2.0 kW of rated power in cooling

25=Class from 2.1 kW up to 2.5 kW of rated power in cooling

30=Class from 2.6 kW up to 3.0 kW of rated power in cooling

35=Class from 3.1 kW up to 3.5 kW of rated power in cooling

Position 4: Operation specification (SF=cooling only, HP=heat pump)

Position 5: Refrigerant (P=R290, E=R32, R=R410A)

Position 6: Compressor technology (F=on/off, V=inverter)

Position 7: Country specific legislation (A=Europe)

Position 8: Connectivity (N=Integrated Wifi)




Air conditioner with 100% reclaimed refrigerant R410A



Air conditioner with low-GWP R32 gas



Air conditioner with R290 natural gas

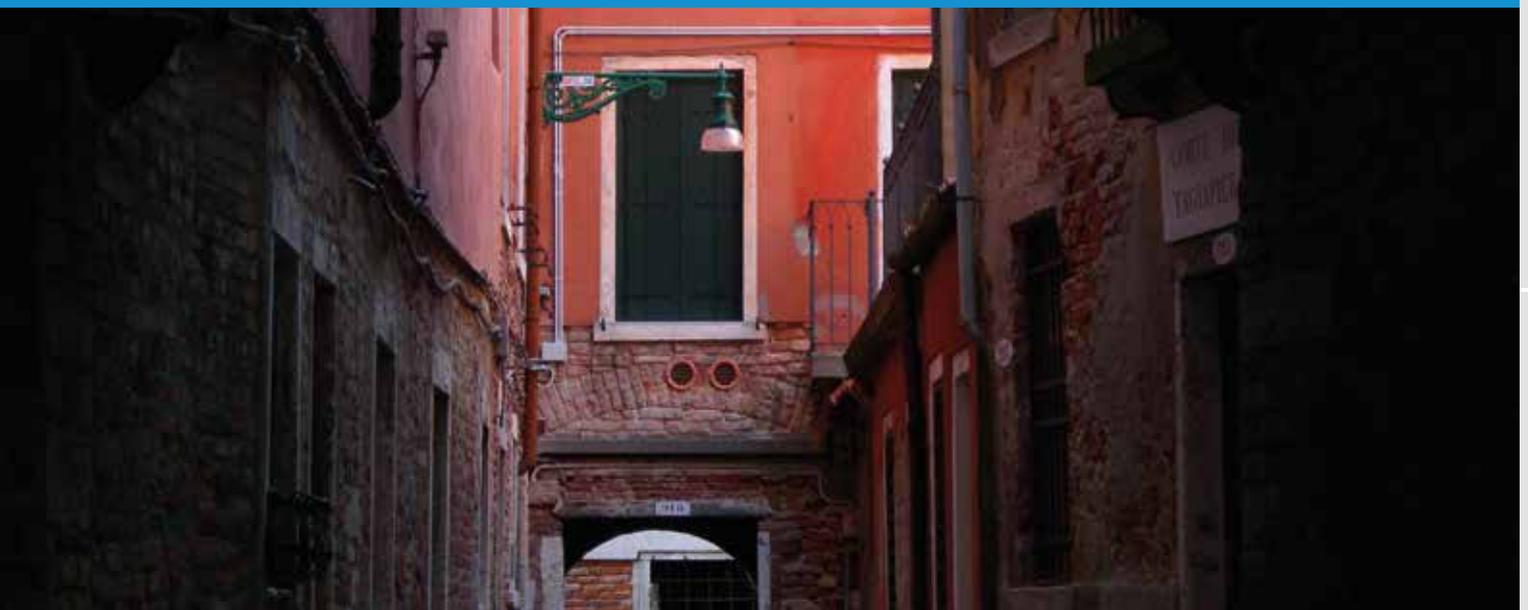

Air conditioners and heat pumps without an outdoor unit

		<2.0 kW	2.1÷2.5 kW
UNICO TOWER Vertical format 	INVERTER VERSION		Unico Tower 25 HP RVA (02153)* 
	ON/OFF VERSION		
UNICO TWIN For two rooms 	ON/OFF VERSION		
	ON/OFF VERSION		
UNICO EASY Console format 	ON/OFF VERSION	Unico Easy S1 SF (02037)	
	ON/OFF VERSION	Unico Easy S1 HP (02036)	
			
UNICO R 2 kW auxiliary backup 	ON/OFF VERSION		Unico R 10 HP (01495)  
	ON/OFF VERSION		

Energy efficiency class in cooling, external ambient temperature DB 35°C / WB 24°C; internal ambient temperature 27°C / WB 19°C. Unlike all other models in the range (which can be installed at the top or bottom of the wall), Unico Tower and Unico Easy can only be installed on the floor.



2.6÷3.0 kW	3.1÷3.5 kW
------------	------------

--	--

Unico Twin Master 30 HP RFA (02138)*	
Unico Twin Wall S1 (01996)	



Unico R 12 HP (01496)	
--------------------------	--



UNICO TOWER 25 HP RVA

1 2 3 4 5 6 7 8

New nomenclature

Valid for products marked with *

- Position 1: Unique line name
- Position 2: Range Name (EVO, AIR, EDGE, PRO, TOWER)
- Position 3: Size (20, 25, 30, 35)
20=Class up to 2.0 kW of rated power in cooling
25=Class from 2.1 kW up to 2.5 kW of rated power in cooling
30=Class from 2.6 kW up to 3.0 kW of rated power in cooling
35=Class from 3.1 kW up to 3.5 kW of rated power in cooling
- Position 4: Operation specification (SF=cooling only, HP=heat pump)
- Position 5: Refrigerant (P=R290, E=R32, R=R410A)
- Position 6: Compressor technology (F=on/off, V=inverter)
- Position 7: Country specific legislation (A=Europe)
- Position 8: Connectivity (N=Integrated Wifi)

- Air conditioner with 100% reclaimed refrigerant R410A
- Air conditioner with low-GWP R32 gas
- Air conditioner with R290 natural gas



Installation guidelines

The main rules to follow

1. No minimum installation area according to IEC 60335-2-40

With reference to the IEC 60335-2-40 standard, all Unico models in this catalogue can be installed freely inside any room, at any height and without limits of the walkable area.



R290 (A3) gas in-depth analysis according to the IEC 60335-2-40 standard

The IEC 60335-2-40 standard provides the method for calculating the minimum area in which it is possible to install air conditioners containing type A3 coolant gases. Fixed air conditioners containing R290 charges greater than 152 g require verification of the walkable area of the installation room:

- the higher the quantity of refrigerant charge, the larger the room must be;
- the lower the installation height of the machine, the larger the room must be.

The table below shows the minimum walkable areas of the rooms in which the machines can be installed, depending on the installation height and the grams of refrigerant charge (between 152 g and 988 g). Areas smaller than those indicated do not allow the installation of the air conditioner in the room in question, unless the additional precautions required by the IEC 60335-2-40 standard are adopted (such as gas sensors, additional ventilation, etc.).


Minimum walkable areas of the R290 gas room		Installation height of the air conditioner			
		0,6m	1,0m	1,8m	2,2m
Air conditioner gas charge	≤ 152 g (Unico with R290)	Free	Free	Free	Free
	153 g	37 m ²	13 m ²	4 m ²	3 m ²
	220 g	76 m ²	28 m ²	8 m ²	6 m ²
	290 g	133 m ²	48 m ²	15 m ²	10 m ²

N.B. case-by-case checks must be carried out by the installer responsible for installing the air conditioner.

The Unico air conditioners with R290 gas in this catalogue have charges lower than 152 g: it is therefore not necessary to carry out any check of the minimum installation area and they can be installed inside any room, at any height and without limits of walkable area.


2. Along the perimeter, top or bottom

Unico can be installed along the entire perimeter wall of the house, near the floor or ceiling, in the centre of the wall or in the corners of the room (with the exception of the Unico Tower and Unico Easy models, which can only be installed on the floor). Check the clearance distances and installation methods in the specific manual for each model.

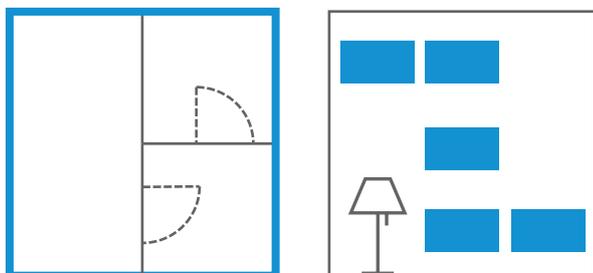

3. On the outside, only 2 holes

The operation of Unico requires the drilling of two holes in the wall (160 or 200 mm), positioned as indicated in the drilling template, which can be downloaded in the download area of the website www.olimpiasplesdid.com. In models with heat pump (HP versions) it is always necessary to make a third small hole, for the condensation drain. The Unico models, previously installed, can be easily replaced, thanks to maintaining of the same centre distance of the air inlet and outlet holes. Use the drilling templates to perform the necessary checks in preparation for installation.

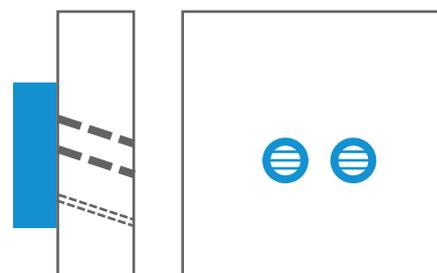


4. Condensation drain: when needed

For all HP versions it is mandatory to create a condensation drain (except in the case in which "ONLY COOLING" operation is set during installation, an option valid only for the Unico Evo PVAN and Unico Pro EVAN models). All "ONLY COOLING" versions can avoid condensation draining, provided the conditions reported in the installation manuals of the specific model are respected (first and foremost that the external air temperature must be higher than +23°C in the cooling phase).

5. Flap adjusted for better comfort

Depending on the type of installation chosen, it is necessary to optimise the distribution of comfort in the room by correctly configuring the control electronics of the air outlet flap (see instructions in the manual under "High/low installation configuration").

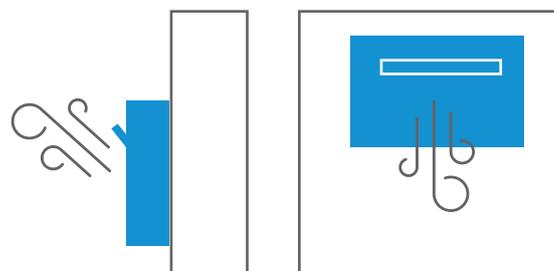

NEW

Italian design by:



UNICO EVO

The quietest and most efficient, with inverter motor and R290 gas



SILENT MODE

With the Silent Mode function active (compressor on), it reaches a maximum of 30 dB(A).



SYNC POWER SYSTEM

The new Twin Rotary compressor and the latest generation electronics are synchronised to obtain the best acoustic comfort, in all operating conditions.



HIGH EFFICIENCY

Thanks to the new compressor and to optimising all the components, Unico Evo reaches energy class A+, in cooling mode.



CONDENSATION DRAIN

Mandatory (except when "ONLY COOLING" mode is set during installation).




FEATURES

- Two max power models: 2.3 kW and 2.5 kW
- Available in the HP version (heat pump). In the absence of the condensation drain, during installation the machine can be configured in the version "ONLY COOLING", deactivating the heating function. If necessary, it is also possible to configure the machine in "ONLY HEATING" disabling the cooling function.
- Cooling class: up to **A+**
- Natural refrigerant gas: R290 (GWP=3)
- Internal layout of the machine optimised for easy maintenance.
- Large flap for homogeneous diffusion of air in the environment
- Equipped with multi-filtration system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against bad smells).
- Backlit display with touch controls on the machine.
- On /off contact for enabling or energy boost.
- There is an RS485 port designed to control the air conditioner with external BMS in Modbus RTU language.
- 100% recyclable packaging, 98% plastic free.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Economy function:** allows energy savings, automatically optimising machine performance
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Silent Mode function:** mode that sets the machine to the lowest noise level. The compressor and fans are set to bring the sound pressure to just 30 dB(A).
- **24h timer**

DIMENSIONS AND WEIGHT

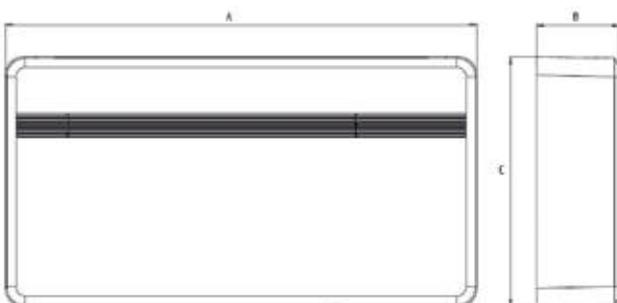

		20/25
A	mm	1015
B	mm	180
C	mm	540
Weight	kg	41

TECHNICAL DATA			Unico Evo 20 HP PVAN	Unico Evo 25 HP PVAN
PRODUCT CODE			02453	02455
EAN CODE			8021183024531	8021183024555
Cooling power (min/max)		kW	1,0 / 2,3	1,0 / 2,5
Heating power (min/max)		kW	1,0 / 2,2	1,0 / 2,3
Nominal cooling capacity (1)	Prated	kW	1,7	2,1
Nominal heating capacity (1)	Prated	kW	1,5	1,7
Nominal power consumption for cooling (1)	PEER	kW	0,5	0,8
Nominal absorption for cooling (1)		A	4,7	4,7
Nominal power consumption for heating (1)	PCOP	kW	0,4	0,5
Nominal absorption for heating (1)		A	3,4	3,4
Nominal energy efficiency index (1)	EERd		3,1	2,6
Nominal efficiency coefficient (1)	COPd		3,4	3,1
Energy efficiency class in cooling (1)				
Energy efficiency class in heating (1)				
Energy consumption in "thermostat off" mode	PTO	W	14	14
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	0,5	0,8
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	0,4	0,5
Cooling power with Silent Mode function		kW	1,4	1,4
Heating power with Silent Mode function		kW	1,4	1,4
Supply voltage		V-F-Hz	230-1-50	230-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264
Maximum power consumption in cooling mode (1)		kW	0,3 / 1,0	0,3 / 1,1
Absorption in cooling mode (min/max)		A	2,5 / 7,0	2,5 / 7,2
Absorbed power in heating mode (min/max)		kW	0,3 / 1,0	0,3 / 1,0
Maximum absorption in heating mode (min/max)		A	2,1 / 5,7	2,1 / 5,9
Maximum power consumption with electric resistance heating		kW	-	-
Maximum absorption with electric resistance heating		A	-	-
Dehumidification capacity		l/h	0,7	0,7
Air flow rate in cooling environment (max/med/min)		m³/h	380/270/195	380/270/195
Air flow rate in heating environment (max/med/min)		m³/h	380/270/195	380/270/195
Air flow rate with electric resistance heating environment		m³/h	-	-
External air flow rate in cooling (max/min)		m³/h	650/350	650/350
External air flow rate in heating (max/min)		m³/h	650/350	650/350
Internal ventilation speed			3	3
External ventilation speed			6	6
Diameter wall holes**		mm	162/202	162/202
Electric resistance heating			-	-
Maximum remote control range (distance/angle)		m / °	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	1015 x 540 x 180	1015 x 540 x 180
Dimensions (WxHxD) (with packaging)		mm	1100 x 605 x 290	1100 x 605 x 290
Weight (without packaging)		kg	41	41
Weight (with packaging)		kg	43	43
Internal sound pressure (min/max) (2)		dB(A)	26-40	26-40
Silent Mode sound pressure level		dB(A)	30	30
Degree of protection provided by covers			IP20	IP20
Refrigerant gas*		Type	R290	R290
Refrigerant gas charge		kg	0,145	0,145
Global warming potential	GWP		3	3
Maximum operating pressure		MPa	3,1	3,1
Power cable (N° pole x section mm²)			3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor ambient DB 20°C / WB 15°C - COOLING MODE: Temperature: outdoor environment DB 35°C / WB 24°C; indoor ambient DB 27°C / WB 19°C

(2) Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

*Hermetically sealed equipment containing natural GAS with GWP equivalent to 3.

** Machine supplied with 202 mm wall opening grilles. If necessary, to replace an old Unico, the machine can also be installed with holes of 162 mm in diameter.



UNICO AIR

The thinnest (only 16 cm thick)

SLIM DESIGN

All Unico's technology in just 16 cm thickness. Unico Air is the thinnest air conditioner without outdoor unit,






SILENT SYSTEM

Thanks to sound-absorbing and anti-vibration materials, sound pressure drops up to 27 dB (A)*



PURE SYSTEM

Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).

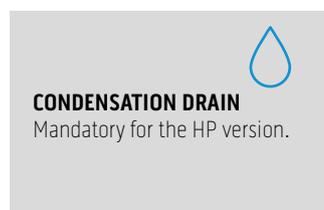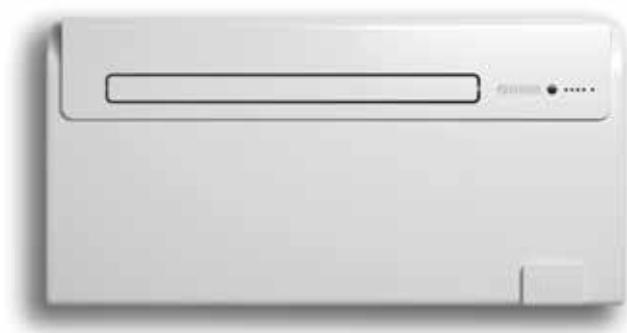

FEATURES

- Power: 1.8 kW
- Available in the versions: SF (Only cooling) - HP (Heat Pump)
- Cooling class **A**
- R410A refrigerant gas
- Large flap for the homogeneous diffusion of air in the environment
- Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).
- Multifunction remote control

FUNCTIONS

- **Cooling, heating (HP only), dehumidification and ventilation**
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Sleep function:** gradually increases the set temperature and ensures reduced noise for better night-time well-being.
- **Condensation drain function:** automatic draining in cooling mode.
- **24 H timer**

DIMENSIONS AND WEIGHT



		8
A	mm	978
B	mm	164
C	mm	491
Weight	kg	37

* Measurement in a semi-anechoic chamber at 2m distance ventilation only.

TECHNICAL DATA			Unico Air 8 SF	Unico Air 8 HP
PRODUCT CODE			01503	01504
EAN CODE			8021183015034	8021183015041
Cooling power (min/max)		kW	-	-
Heating power (min/max)		kW	-	-
Nominal cooling capacity (1)	Prated	kW	1,8	1,8
Nominal heating capacity (1)	Prated	kW	-	1,7
Nominal power consumption for cooling (1)	PEER	kW	0,7	0,7
Nominal absorption for cooling (1)		A	3,1	3,1
Nominal power consumption for heating (1)	PCOP	kW	-	0,5
Nominal absorption for heating (1)		A	-	2,5
Nominal energy efficiency index (1)	EERd		2,6	2,6
Nominal efficiency coefficient (1)	COPd		-	3,1
Energy efficiency class in cooling (1)				
Energy efficiency class in heating (1)			-	
Energy consumption in "thermostat off" mode	PTO	W	14,0	14,0
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	0,7	0,7
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	-	0,5
Supply voltage		V-F-Hz	230-1-50	230-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264
Absorbed power in cooling mode (min/max)		kW	-	-
Absorption in cooling mode (min/max)		A	-	-
Absorbed power in heating mode (min/max)		kW	-	-
Maximum absorption in heating mode (min/max)		A	-	-
Maximum power consumption with electric resistance heating		kW	-	-
Maximum absorption with electric resistance heating		A	-	-
Dehumidification capacity		l/h	0,6	0,6
Air flow rate in cooling environment (max/med/min)		m³/h	215/180/150	215/180/150
Air flow rate in heating environment (max/med/min)		m³/h	-	215/180/150
Air flow rate with electric resistance heating environment		m³/h	-	-
External air flow rate in cooling (max/min)		m³/h	380	380
External air flow rate in heating (max/min)		m³/h	-	380
Internal ventilation speed			3	3
External ventilation speed			1	1
Diameter wall holes		mm	162	162
Electric resistance heating			-	-
Maximum remote control range (distance/angle)		m / °	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	978 x 491 x 164	978 x 491 x 164
Dimensions (WxHxD) (with packaging)		mm	1060 x 595 x 250	1060 x 595 x 250
Weight (without packaging)		kg	37	37
Weight (with packaging)		kg	41	41
Internal sound pressure (min/max) (2)		dB(A)	27-38	27-38
Degree of protection provided by covers			IP 20	IP 20
Refrigerant gas*		Type	R410A	R410A
Global warming potential	GWP		2088	2088
Refrigerant gas charge		kg	0,47	0,47
Maximum operating pressure		MPa	4,20	4,20
Power cable (N° pole x section mm²)			3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 2088.

** Machine supplied with 202 mm wall opening grilles. If necessary, to replace an old Unico, the machine can also be installed with holes of 162 mm in diameter.



UNICO AIR

The slimmest, with inverter motor and R32 gas

LOW GWP GAS

Use the R32 refrigerant gas: more efficient and with greenhouse effect reduced to almost 70% (compared to R410A).





SLIM DESIGN

All Unico's technology in just 16 cm thickness. Unico Air is the thinnest air conditioner without outdoor unit,



SILENT SYSTEM

Thanks to sound-absorbing and anti-vibration materials, sound pressure drops up to 27 dB (A)*

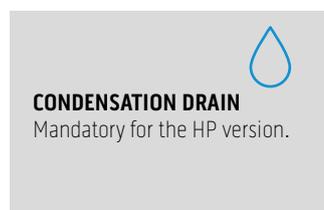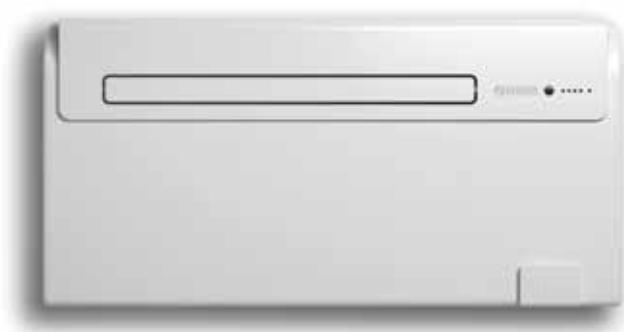


FEATURES

- Two models of Max power: 2.1 kW and 2.4 kW
- Available in the SF (Only cooling) - HP (Heat Pump) versions
- Cooling class **A**
- R32 refrigerant gas
- Large flap for the homogeneous diffusion of the air in the environment
- Multi-filtering system consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours). Multifunction remote control

FUNCTIONS

- **Cooling, heating (HP only), dehumidification and ventilation**
- **Economy function:** allows energy savings, automatically optimising machine performance
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Sleep function:** gradually increases the set temperature and ensures reduced noise for better night-time well-being.
- **24 H timer**

DIMENSIONS AND WEIGHT

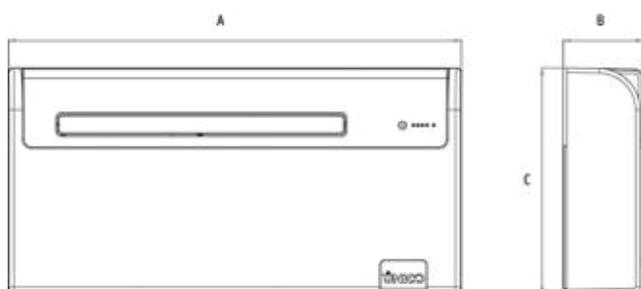

		20	25
A	mm	978	978
B	mm	164	164
C	mm	491	500
Weight	kg	37	39

* Measurement in a semi-anechoic chamber at 2m distance ventilation only.

TECHNICAL DATA			Unico Air 20 SF EVA	Unico Air 20 HP EVA	Unico Air 25 HP EVA
PRODUCT CODE			02112	02111	02095
EAN CODE			8021183021127	8021183021110	8021183020953
Cooling power (min/max)		kW	1,5/2,1	1,5/2,1	1,9/2,4
Heating power (min/max)		kW	-	1,3/1,7	1,8/2,3
Nominal cooling capacity (1)	Prated	kW	1,7	1,7	2,2
Nominal heating capacity (1)	Prated	kW	-	1,6	2,1
Nominal power consumption for cooling (1)	PEER	kW	0,7	0,7	0,8
Nominal absorption for cooling (1)		A	3,1	3,1	4,7
Nominal power consumption for heating (1)	PCOP	kW	-	0,5	0,7
Nominal absorption for heating (1)		A	-	2,5	3,4
Nominal energy efficiency index (1)	EERd		2,6	2,6	2,6
Nominal efficiency coefficient (1)	COPd		-	3,1	3,1
Energy efficiency class in cooling (1)					
Energy efficiency class in heating (1)			-		
Energy consumption in "thermostat off" mode	PTO	W	24	24	33
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	0,7	0,7	0,8
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	-	0,5	0,7
Supply voltage		V-F-Hz	230-1-50	230-1-50	230-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264	198 / 264
Maximum power consumption in cooling mode (1)		kW	0,5/0,9	0,5/0,9	0,7/1,1
Absorption in cooling mode (min/max)		A	2,4/4,1	2,4/4,1	3,7/5,3
Absorbed power in heating mode (min/max)		kW	-	0,4/0,8	0,5/0,8
Maximum absorption in heating mode (min/max)		A	-	2,0/3,7	2,5/4,6
Maximum power consumption with electric resistance heating		kW	-	-	-
Maximum absorption with electric resistance heating		A	-	-	-
Dehumidification capacity		l/h	0,6	0,6	0,8
Air flow rate in cooling environment (max/med/min)		m³/h	235/180/150	235/180/150	235/180/150
Air flow rate in heating environment (max/med/min)		m³/h	-	235/180/150	190/170/150
Air flow rate with electric resistance heating environment		m³/h	-	-	-
External air flow rate in cooling (max/min)		m³/h	380/190	380/190	380/190
External air flow rate in heating (max/min)		m³/h	-	380/190	380/190
Internal ventilation speed			3	3	3
External ventilation speed			2	2	2
Diameter wall holes		mm	162	162	162
Electric resistance heating			-	-	-
Maximun remote control range (distance/angle)		m / °	8 / ±80°	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	978 x 491 x 164	978 x 491 x 164	978 x 500 x 164
Dimensions (WxHxD) (with packaging)		mm	1060 x 595 x 250	1060 x 595 x 250	1060 x 595 x 250
Weight (without packaging)		kg	37	37	39
Weight (with packaging)		kg	41	41	43
Internal sound pressure (min/max) (2)		dB(A)	27-38	27-38	27-38
Degree of protection provided by covers			IP20	IP20	IP20
Refrigerant gas*	Type		R32	R32	R32
Global warming potential	GWP		675	675	675
Refrigerant gas charge		kg	0,28	0,28	0,37
Maximum operating pressure		MPa	4,28	4,28	4,28
Power cable (N° pole x section mm²)			3 x 1,5	3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C


(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 675.

UNICO EDGE

The most versatile

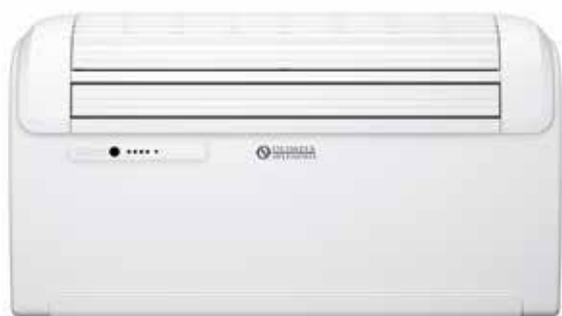


ITALIAN DESIGN

Designed by Ercoli + Garlandini studio, it stands out for its smooth lines, and the retro design, combined with a "strong personality" texture.




PURE SYSTEM

Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).



HEAT PUMP

Heat pump air conditioner. Thanks to this feature you can replace or support traditional heating in intermediate seasons (only in HP version).

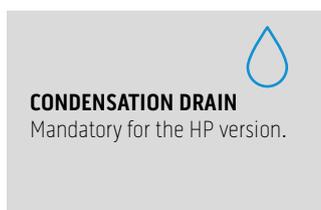


FEATURES

- Power: 2.7 kW
- Available in the versions: SF (Only Cooling) - HP (Heat Pump)
- Cooling class **A**
- R410A refrigerant gas
- Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).
- Multifunction remote control

FUNCTIONS

- **Cooling, heating (HP only), dehumidification and ventilation**
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Sleep function:** gradually increases the set temperature and ensures reduced noise for better night-time well-being.
- **Condensation drainage function:** automatic drainage in cooling mode.
- **24 H timer**

DIMENSIONS AND WEIGHT

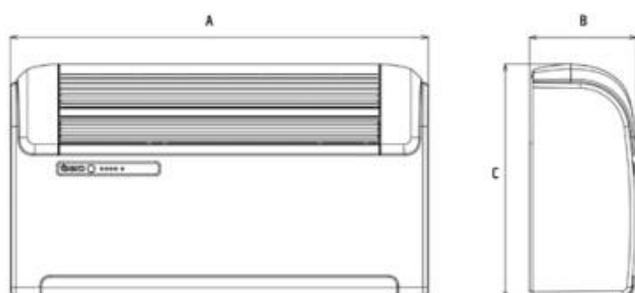

		30
A	mm	902
B	mm	229
C	mm	516
Weight	kg	40

TECHNICAL DATA			Unico Edge 30 SF RFA	Unico Edge 30 HP RFA
PRODUCT CODE			02132	02133
EAN CODE			8021183021325	8021183021332
Cooling power (min/max)		kW	-	-
Heating power (min/max)		kW	-	-
Nominal cooling capacity (1)	Prated	kW	2,7	2,7
Nominal heating capacity (1)	Prated	kW	-	2,5
Nominal power consumption for cooling (1)	PEER	kW	1,0	1,0
Nominal absorption for cooling (1)		A	4,3	4,3
Nominal power consumption for heating (1)	PCOP	kW	-	0,8
Nominal absorption for heating (1)		A	-	3,3
Nominal energy efficiency index (1)	EERd		2,6	2,6
Nominal efficiency coefficient (1)	COPd		-	3,1
Energy efficiency class in cooling (1)				
Energy efficiency class in heating (1)			-	
Energy consumption in "thermostat off" mode	PTO	W	14,0	14,0
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	1,0	1,0
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	-	0,8
Supply voltage		V-F-Hz	230-1-50	230-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264
Maximum power consumption in cooling mode (1)		kW	-	-
Absorption in cooling mode (min/max)		A	-	-
Absorbed power in heating mode (min/max)		kW	-	-
Maximum absorption in heating mode (min/max)		A	-	-
Maximum power consumption with electric resistance heating		kW	-	-
Maximum absorption with electric resistance heating		A	-	-
Dehumidification capacity		l/h	0,9	1,1
Air flow rate in cooling environment (max/med/min)		m³/h	490 / 430 / 360	490 / 430 / 360
Air flow rate in heating environment (max/med/min)		m³/h	-	450 / 400 / 330
Air flow rate with electric resistance heating environment		m³/h	-	-
External air flow rate in cooling (max/min)		m³/h	520 / 350	500 / 340
External air flow rate in heating (max/min)		m³/h	-	500 / 340
Internal ventilation speed			3	3
External ventilation speed			3	3
Diameter wall holes**		mm	162/202	162/202
Electric resistance heating			-	-
Maximum remote control range (distance/angle)		m / °	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	902 x 516 x 229	902 x 516 x 229
Dimensions (WxHxD) (with packaging)		mm	980 x 610 x 350	980 x 610 x 350
Weight (without packaging)		kg	40	40
Weight (with packaging)		kg	44	44
Internal sound pressure (min/max) (2)		dB(A)	33-42	33-42
Degree of protection provided by covers			IP20	IP 20
Refrigerant gas*		Type	R410A	R410A
Global warming potential	GWP		2088	2088
Refrigerant gas charge		kg	0,54	0,55
Maximum operating pressure		MPa	3,6	3,6
Power cable (N° pole x section mm²)			3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 2088.

** Machine supplied with 202 mm wall opening grilles. If necessary, to replace an old Unico, the machine can also be installed with holes of 162 mm in diameter.

UNICO EDGE



ercoli+garlandini

The most versatile, with inverter motor and R32 gas




AWARD WINNING DESIGN

Designed by Ercoli + Garlandini studio, it stands out for its smooth lines, and the retro design, combined with a "strong personality" texture.



PURE SYSTEM

Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).



HEAT PUMP

Heat pump air conditioner. Thanks to this feature you can replace or support traditional heating in intermediate seasons (only in HP version).



CONDENSATION DRAIN
Mandatory for the HP version.




FEATURES

- Max Power: 3.0 kW
- Available in the versions: SF (Only cooling) - HP (Heat Pump)
- Cooling class **A**
- R32 refrigerant gas
- Large flap for the homogeneous diffusion of the air in the environment
- Multi-filtering system consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours). Multifunction remote control

FUNCTIONS

- **Cooling, heating (HP only), dehumidification and ventilation**
- **Economy function:** allows energy savings, automatically optimising machine performance
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Sleep function:** gradually increases the set temperature and ensures reduced noise for better night-time well-being.
- **24 H timer**

DIMENSIONS AND WEIGHT

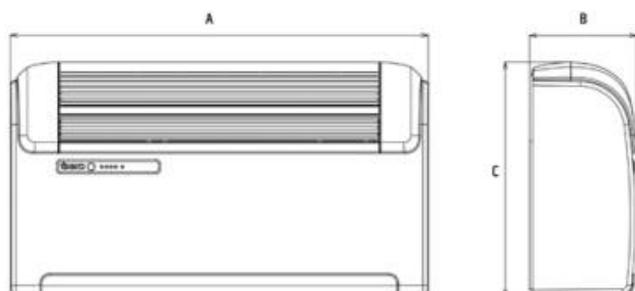

		30
A	mm	902
B	mm	229
C	mm	506
Weight	kg	39/40

TECHNICAL DATA			Unico Edge 30 SF EVA	Unico Edge 30 HP EVA
PRODUCT CODE			02116	02115
EAN CODE			8021183021165	8021183021158
Cooling power (min/max)		kW	1,9/3,0	1,9/3,0
Heating power (min/max)		kW	-	1,9/3,1
Nominal cooling capacity (1)	Prated	KW	2,7	2,7
Nominal heating capacity (1)	Prated	kW	-	2,4
Nominal power consumption for cooling (1)	PEER	kW	1,0	1,0
Nominal absorption for cooling (1)		A	5,0	5,0
Nominal power consumption for heating (1)	PCOP	kW	-	0,8
Nominal absorption for heating (1)		A	-	3,8
Nominal energy efficiency index (1)	EERd		2,6	2,6
Nominal efficiency coefficient (1)	COPd		-	3,1
Energy efficiency class in cooling (1)				
Energy efficiency class in heating (1)			-	
Energy consumption in "thermostat off" mode	PTO	W	29	29
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	1,0	1,0
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	-	0,8
Supply voltage		V-F-Hz	230-1-50	230-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264
Maximum power consumption in cooling mode (1)		kW	0,7/1,4	0,7/1,4
Absorption in cooling mode (min/max)		A	3,4/6,6	3,4/6,6
Absorbed power in heating mode (min/max)		kW	-	0,6/1,1
Maximum absorption in heating mode (min/max)		A	-	3,1/5,8
Maximum power consumption with electric resistance heating		kW	-	-
Maximum absorption with electric resistance heating		A	-	-
Dehumidification capacity		l/h	1,1	1,1
Air flow rate in cooling environment (max/med/min)		m³/h	490 / 430 / 360	490 / 430 / 360
Air flow rate in heating environment (max/med/min)		m³/h	-	490 / 430 / 360
Air flow rate with electric resistance heating environment		m³/h	-	-
External air flow rate in cooling (max/min)		m³/h	520 / 350	500 / 340
External air flow rate in heating (max/min)		m³/h	-	500 / 340
Internal ventilation speed			3	3
External ventilation speed			6	6
Diameter wall holes**		mm	162/202	162/202
Electric resistance heating			-	-
Maximum remote control range (distance/angle)		m / °	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	902 x 506 x 229	902 x 506 x 229
Dimensions (WxHxD) (with packaging)		mm	980 x 610 x 350	980 x 610 x 350
Weight (without packaging)		kg	39	40
Weight (with packaging)		kg	43	43
Internal sound pressure (min/max) (2)		dB(A)	33-43	33-43
Degree of protection provided by covers			IP 20	IP 20
Refrigerant gas*		Type	R32	R32
Global warming potential	GWP		675	675
Refrigerant gas charge		kg	0,42	0,42
Maximum operating pressure		MPa	4,28	4,28
Power cable (N° pole x section m2)			3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 675.

** Machine supplied with 202 mm wall opening grilles. If necessary, to replace an old Unico, the machine can also be installed with holes of 162 mm in diameter.

NEW


Italian design by:

Matteo Thun
MATTED THUN & ANTONIO RODRIGUEZ



UNICO PRO

The most powerful, with inverter motor and R32 gas

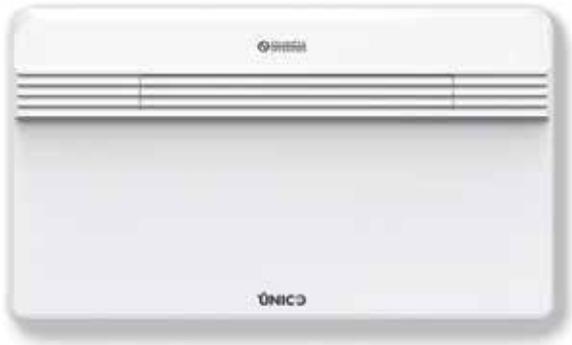

PRO POWER

Super cooling power (up to 3.5 kW) to meet the needs of even the largest environments.



HIGH PERFORMANCE

High efficiency class (up to A+) and state-of-the-art electronics, synchronized with the compressor to achieve the best acoustic comfort, at any operating condition.



AWARD WINNING DESIGN

Designed by Matteo Thun and Antonio Rodriguez, it stands out for its essential and original lines, awarded by numerous international competitions.



CONDENSATION DRAIN

Mandatory (except when "ONLY COOLING" mode is set during installation).




FEATURES

- Two models of Max power: 3.4 kW and 3.5 kW
- Available in the version: HP (Heat Pump). In the absence of condensation drainage, it is possible to configure the machine, during installation, in the "ONLY COOLING" version, disabling the heating function.
- Class in cooling: up to **A+**
- R32 refrigerant gas
- The internal components are all accessible from the front with the machine already installed
- Large flap for the homogeneous diffusion of air in the environment
- Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).
- Backlit display with touch controls on the machine
- On/off contact for enable or energy boost.
- There is an RS485 port prepared for controlling the conditioner with external BMS in Modbus RTU language.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Economy function:** allows energy savings, automatically optimising machine performance
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Silent Mode function:** mode that sets the machine to the lowest noise level. The compressor and fans are set to reduce the sound pressure down to only 34 dB(A).
- **24 H timer**

DIMENSIONS AND WEIGHT

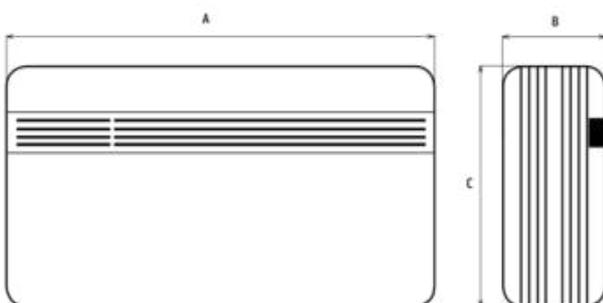

		30/35
A	mm	903
B	mm	215
C	mm	520
Weight	kg	39

TECHNICAL DATA			Unico Pro 30 HP EVAN	Unico Pro 35 HP EVAN
PRODUCT CODE			02238	02239
EAN CODE			8021183022384	8021183022391
Cooling power (min/max)		kW	1,9/3,4	1,9 / 3,5
Heating power (min/max)		kW	1,5/3,0	1,5 / 3,2
Nominal cooling capacity (1)	Prated	kW	2,6	3,1
Nominal heating capacity (1)	Prated	kW	1,8	2,4
Nominal power consumption for cooling (1)	PEER	kW	0,8	1,2
Nominal absorption for cooling (1)		A	4,0	4,3
Nominal power consumption for heating (1)	PCOP	kW	0,5	0,8
Nominal absorption for heating (1)		A	3,6	3,76
Nominal energy efficiency index (1)	EERd		3,1	2,6
Nominal efficiency coefficient (1)	COPd		3,4	3,1
Energy efficiency class in cooling (1)				
Energy efficiency class in heating (1)				
Energy consumption in "thermostat off" mode	PTO	W	22	22
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	0,8	0,8
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	0,5	0,7
Cooling power with Silent Mode function		kW	1,9	1,9
Heating power with Silent Mode function		kW	1,5	1,5
Supply voltage		V-F-Hz	230-1-50	230-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264
Maximum power consumption in cooling mode (1)		kW	0,5/1,5	0,5 / 1,5
Absorption in cooling mode (min/max)		A	3,1/7,5	3,1 / 7,5
Absorbed power in heating mode (min/max)		kW	0,4/1,4	0,4 / 1,4
Maximum absorption in heating mode (min/max)		A	2,5/6,8	2,5 / 6,8
Maximum power consumption with electric resistance heating		kW	-	-
Maximum absorption with electric resistance heating		A	-	-
Dehumidification capacity		l/h	1,3	1,3
Air flow rate in cooling environment (max/med/min)		m³/h	490 / 390 / 350	490 / 390 / 350
Air flow rate in heating environment (max/med/min)		m³/h	490 / 390 / 350	490 / 390 / 350
Air flow rate with electric resistance heating environment		m³/h	-	-
External air flow rate in cooling (max/min)		m³/h	600/120	600/120
External air flow rate in heating (max/min)		m³/h	600/120	600/120
Internal ventilation speed			3	3
External ventilation speed			6	6
Diameter wall holes**		mm	162 / 202	162 / 202
Electric resistance heating			-	-
Maximum remote control range (distance/angle)		m / °	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	903 x 520 x 215	903 x 520 x 215
Dimensions (WxHxD) (with packaging)		mm	980 x 610 x 330	980 x 610 x 330
Weight (without packaging)		kg	39	39
Weight (with packaging)		kg	42	42
Internal sound pressure (min/max) (2)		dB(A)	32-41	32 - 43
Silent Mode sound pressure level		dB(A)	34	34
Degree of protection provided by covers			IP 20	IP 20
Refrigerant gas*		Type	R32	R32
Refrigerant gas charge		kg	0,46	0,46
Global warming potential	GWP		675	675
Maximum operating pressure		MPa	4,28	4,28
Power cable (N° pole x section mm²)			3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 675.

** Machine supplied with 202 mm wall opening grilles. If necessary, to replace an old Unico, the machine can also be installed with holes of 162 mm in diameter.


UNICO TOWER

The air conditioner without outdoor unit, in vertical format, with inverter motor



SPACE SAVING

Developed vertically, it brings comfort where any other installation would be impossible, such as the corner of a room or the space between two windows.



INVERTER SYSTEM

New generation inverter motor, with a wide frequency range and DC inverter fans.



TOUCHSCREEN DISPLAY

Backlit display and touch controls on the machine.



CONDENSATION DRAIN
Mandatory.





FEATURES

- Max power: 2.9 kW
- Available in the version: HP (heat pump)
- Cooling class: up to **A**
- Coolant gas: R410A
- All-metal body
- Floor-mounted installation
- Backlit display with on-board touch controls
- Multifunction remote control with LCD display as standard

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Economy function:** allows energy savings, automatically optimising machine performance
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Silent Mode function:** mode that sets the machine to the lowest noise level. The compressor and fans are set to reduce the sound pressure down to only 31 dB(A).
- **24 H timer**

DIMENSIONS AND WEIGHT

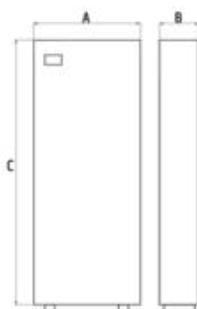

		25
A	mm	470
B	mm	185
C	mm	1390
Weight	kg	54

TECHNICAL DATA			Unico Tower 25 HP RVA
PRODUCT CODE			02153
EAN CODE			8021183021530
Cooling power (min/max)		kW	1,5 / 2,9
Heating power (min/max)		kW	1,5 / 3,1
Nominal cooling capacity (1)	Prated	kW	2,4
Nominal heating capacity (1)	Prated	kW	2,3
Nominal power consumption for cooling (1)	PEER	kW	0,9
Nominal absorption for cooling (1)		A	4,9
Nominal power consumption for heating (1)	PCOP	kW	0,7
Nominal absorption for heating (1)		A	3,7
Nominal energy efficiency index (1)	EERd		2,6
Nominal efficiency coefficient (1)	COPd		3,1
Energy efficiency class in cooling (1)			
Energy efficiency class in heating (1)			
Energy consumption in "thermostat off" mode	PTO	W	29
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	0,9
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	0,7
Cooling power with Silent Mode function		kW	1,5
Heating power with Silent Mode function		kW	1,5
Supply voltage		V-F-Hz	230-1-50
Supply voltage (min/max)		V	198 / 264
Maximum power consumption in cooling mode (1)		kW	0,5/1,7
Absorption in cooling mode (min/max)		A	3,5/8,5
Absorbed power in heating mode (min/max)		kW	0,4/1,4
Maximum absorption in heating mode (min/max)		A	3,1/6,20
Maximum power consumption with electric resistance heating		kW	-
Maximum absorption with electric resistance heating		A	-
Dehumidification capacity		l/h	1,0
Air flow rate in cooling environment (max/med/min)		m³/h	260/200/175
Air flow rate in heating environment (max/med/min)		m³/h	260/200/175
Air flow rate with electric resistance heating environment		m³/h	-
External air flow rate in cooling (max/min)		m³/h	486/230
External air flow rate in heating (max/min)		m³/h	486/230
Internal ventilation speed			3
External ventilation speed			6
Diameter wall holes		mm	162
Electric resistance heating			-
Maximum remote control range (distance/angle)		m / °	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	470 x 1390 x 185
Dimensions (WxHxD) (with packaging)		mm	-
Weight (without packaging)		kg	54
Weight (with packaging)		kg	-
Internal sound pressure (min/max) (2)		dB(A)	27-40
Silent Mode sound pressure level		dB(A)	31
Degree of protection provided by covers			IP20
Refrigerant gas*		Type	R410A
Global warming potential	GWP		2088
Refrigerant gas charge		kg	0,50
Maximum operating pressure		MPa	4,20
Power cable (N° pole x section mm²)			3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C


(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 2088.

UNICO TWIN

The only system to air condition two rooms without outdoor units

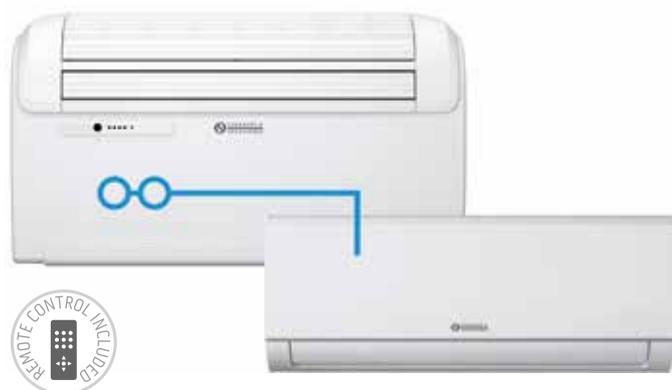


TWIN TECHNOLOGY

Twin technology allows the use of the two units (Master unit and Wall unit) simultaneously or separately depending on requirements, both in heating and cooling mode.



PURE SYSTEM

Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).



HEAT PUMP

Heat pump air conditioner. Thanks to this feature you can replace or support traditional heating in intermediate seasons (only in HP version).



SYSTEM features

- Power: 2.6 kW for the master unit and 2.5 kW for the wall unit
- Independent or combined operation: if simultaneous operation is chosen, the two units share the available power and are forced to the minimum available speed
- Available in the version: HP (heat pump)
- Cooling class: **A**
- Coolant gas: R410A
- Equipped with a multi-filtration system, consisting of an electrostatic filter (with anti-dust function) and an activated carbon filter (effective against odours).
- Dual multi-function remote control

MASTER features

- Cooling capacity: 2.6 kW
- Capacity in HP (heat pump) function: 2.5 kW
- Installation versatility: Top or bottom wall installation.
- Ease of installation: Unico Twin is installed completely from the inside in a few minutes.
- Wide flap for a homogeneous diffusion of the air into the room.


FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Sleep function:** gradually increases the set temperature and ensures reduced noise for better night-time well-being.
- **24 H timer**

WALL features

- Nominal cooling capacity: 2,5 kW
- Nominal heating capacity: 2,2 kW
- Sound power level: from 25 to 36 dB(A)

DIMENSIONS AND WEIGHT

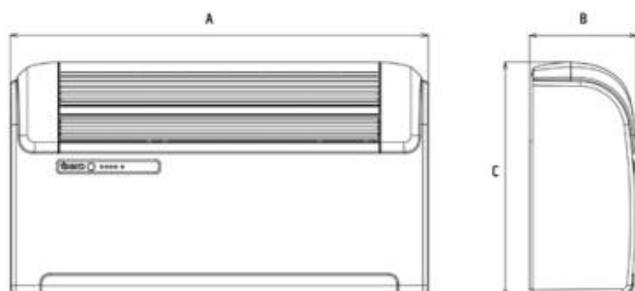

UNICO TWIN MASTER		
A	mm	902
B	mm	229
C	mm	516
Weight	kg	40,5

TECHNICAL DATA			Unico Twin Master 30 HP RFA	
PRODUCT CODE			02138	
EAN CODE			8021183021387	
Nominal cooling capacity (1)	Prated	kW	2,6	
Nominal heating capacity (1)	Prated	kW	2,5	
Nominal power consumption for cooling (1)	PEER	kW	0,9	
Nominal absorption for cooling (1)		A	4,3	
Nominal power consumption for heating (1)	PCOP	kW	0,8	
Nominal absorption for heating (1)		A	3,5	
Nominal energy efficiency index (1)	EERd		2,7	
Nominal efficiency coefficient (1)	COPd		3,1	
Energy efficiency class in cooling (1)			A	
Energy efficiency class in heating (1)			A	
Energy consumption in "thermostat off" mode	PTO	W	14,0	
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	0,9	
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	0,8	
Supply voltage	V-F-Hz		230-1-50	
Supply voltage (min/max)		V	198 / 264	
Maximum power consumption in cooling mode		W	1200	
Maximum absorption in cooling mode		A	5,4	
Maximum power consumption in heating mode		W	1080	
Maximum absorption in heating mode		A	4,8	
Dehumidification capacity		l/h	1,1	
Air flow rate in cooling environment (max/med/min)		m³/h	490 / 430 / 360	
Air flow rate in heating environment (max/med/min)		m³/h	450 / 400 / 330	
Air flow rate in cooling environment (max/med/min)		m³/h	500 / 370 / 340	
External air flow rate in heating (max/min)		m³/h	500 / 370 / 340	
Internal ventilation speed			3	
External ventilation speed			3	
Diameter wall holes**		mm	162/202	
Dimensions (WxHxD) (without packaging)		mm	902 x 516 x 229	
Dimensions (WxHxD) (with packaging)		mm	980 x 610 x 350	
Weight (without packaging)		kg	40,5	
Weight (with packaging)		kg	44,0	
Internal sound pressure (min/max) (2)		dB(A)	33-42	
Degree of protection provided by covers			IP 20	
Refrigerant gas*	Type		R410A	
Global warming potential	GWP		2088	
Refrigerant gas charge		kg	0,78	
Power cable (N° pole x section mm²)			3 x 1,5	

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -10°C

Performance and optimal operation are guaranteed with units operating alternately.

* Equipment not hermetically sealed containing fluorinated gases with an equivalent GWP of 2088.

Performance is measured with 5 m gas pipes.

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Equipment not hermetically sealed containing fluorinated gases with an equivalent GWP of 2088.

** Machine supplied with 202 mm wall opening grilles. If necessary, to replace an old Unico, the machine can also be installed with holes of 162 mm in diameter.

TECHNICAL DATA			Unico Twin Wall S1	
PRODUCT CODE			01996	
EAN CODE			8021183019964	
Nominal cooling capacity (1)		kW	2,5	
Nominal heating capacity (1)		kW	2,2	
Nominal power consumption for cooling (1)		kW	0,9	
Nominal absorption for cooling (1)		A	4,2	
Nominal power consumption for heating (1)		kW	0,7	
Nominal absorption for heating (1)		A	3,2	
Maximum power consumption in cooling mode		W	1200	
Maximum absorption in cooling mode		A	5,4	
Maximum power consumption in heating mode		W	1080	
Maximum absorption in heating mode		A	4,8	
Dehumidification capacity		l/h	1,0	
Air flow rate in cooling environment (max/med/min)		m³/h	310 / 230 / 180	
Air flow rate in heating environment (max/med/min)		m³/h	470 / 360 / 310	
Internal ventilation speed			3	
Dimensions (WxHxD) (without packaging)		mm	805 x 285 x 194	
Dimensions (WxHxD) (with packaging)		mm	870 x 360 x 270	
Weight (without packaging)		kg	7,5	
Weight (with packaging)		kg	9,6	
Internal sound pressure (2)		dB(A)	25-36	
Degree of protection provided by covers			IP X1	
Power cable (N° pole x section mm²)			3 x 1	
Connecting liquid pipeline diameter	inch - mm		1/4 - 6,35	
Connecting gas pipeline diameter	inch - mm		3/8 - 9,52	
Maximum piping length		m	10	
Maximum height difference		m	5	

Ease of installation

MASTER UNIT

Thanks to the practical template with two 202 mm holes included in the packaging, in minutes you can install, completely from the inside, the MASTER unit in the first room to be climate-controlled.

The MASTER unit is connected to the WALL unit, thanks to the refrigeration taps housed on the right-hand side of the unit.

Maximum length of refrigerant lines of 10 metres. It is not possible to add gas beyond the pre-charge.

WALL UNIT

The WALL unit is installed on the wall, in the second room to be climate-controlled.

UNICO EASY

The console air-conditioner without outdoor unit.



SUPPORTING LEGS

Equipped with two supporting legs for a more stable positioning.



TOUCHSCREEN DISPLAY

Latest generation digital control panel, for precise control over all the functions.



HEAT PUMP

Heat pump air conditioner. Thanks to this feature you can replace or support traditional heating in intermediate seasons (only in HP version).



CONDENSATION DRAIN
Mandatory for the HP version.




FEATURES

- Max Power: 2.0 kW
- Available in the versions: SF (Only Cooling) - HP (Heat Pump)
- Cooling class **A**
- R410A refrigerant gas
- Floor installation
- Control display on the touch screen machine
- Remote control

FUNCTIONS

- **Cooling, heating (HP only), dehumidification and ventilation**
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Sleep function:** gradually increases the set temperature and ensures reduced noise for better night-time well-being.
- **24 H timer**

DIMENSIONS AND WEIGHT

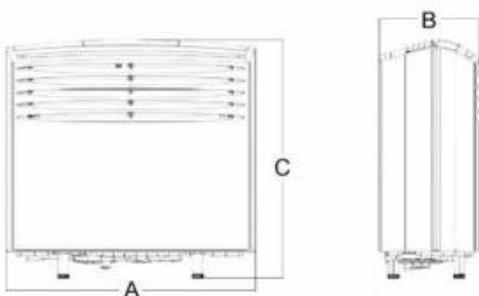

		UNICO EASY	
A	mm		693
B	mm		276
C	mm		665
Weight	kg		36

TECHNICAL DATA			Unico Easy S1 SF	Unico Easy S1 HP
PRODUCT CODE			02037	02036
EAN CODE			8021183020373	8021183020366
Cooling power (min/max)		kW	-	-
Heating power (min/max)		kW	-	-
Nominal cooling capacity (1)	Prated	kW	2,0	2,0
Nominal heating capacity (1)	Prated	kW	-	1,8
Nominal power consumption for cooling (1)	PEER	kW	0,8	0,8
Nominal absorption for cooling (1)		A	3,45	3,45
Nominal power consumption for heating (1)	PCOP	kW	-	0,7
Nominal absorption for heating (1)		A	-	3,00
Nominal energy efficiency index (1)	EERd		2,6	2,6
Nominal efficiency coefficient (1)	COPd		-	2,7
Energy efficiency class in cooling (1)				
Energy efficiency class in heating (1)			-	
Energy consumption in "thermostat off" mode	PTO	W	1,0	1,0
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	0,8	0,8
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	-	0,7
Supply voltage		V-F-Hz	220/240-1-50	220/240-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264
Maximum power consumption in cooling mode		kW	1,027	1,036
Maximum absorption in cooling mode		A	5,46	5,55
Maximum power consumption in heating mode		kW	-	1,036
Maximum absorption in heating mode		A	-	5,6
Dehumidification capacity		l/h	2,2	2,2
Air flow rate in cooling environment (max/med/min)		m³/h	405 / 370 / 335	405 / 370 / 335
Air flow rate in heating environment (max/med/min)		m³/h	-	405 / 370 / 335
External air flow rate in cooling (max/min)		m³/h	505 / 0	505 / 0
External air flow rate in heating (max/min)		m³/h	-	505 / 0
Internal ventilation speed			3	3
External ventilation speed			2	2
Diameter wall holes**		mm	162	162
Electric resistance heating			-	-
Maximum remote control range (distance/angle)		m / °	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	693 x 665 x 276	693 x 665 x 276
Dimensions (WxHxD) (with packaging)		mm	770 x 865 x 421	770 x 865 x 423
Weight (without packaging)		kg	36	35,6
Weight (with packaging)		kg	41	40,9
Internal sound power level (EN 12102)	LWA	dB(A)	60	60
Degree of protection provided by covers			IP X0	IPX0
Refrigerant gas*		Type	R410A	R410A
Global warming potential	GWP		2088	2088
Refrigerant gas charge		kg	0,51	0,515
Maximum operating pressure		MPa	4,2	4,2
Power cable (N° pole x section mm²)			3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 32°C – WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -5°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 15°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 2088.

UNICO R

With auxiliary backup, for the harshest climates



RECLAIMED REFRIGERANT

It uses R410A reclaimed refrigerant gas. This refrigerant, identical to virgin refrigerant in purity and specifications, is reclaimed from existing industrial processes and subsequently re-processed. By avoiding the production of virgin refrigerant, Unico contributes to the development of a circular economy.



+2 KW AUXILIARY BACKUP

Unico R is designed for the coldest temperatures. When the outdoor ambient temperatures are below 2°C, the heating mode is obtained by activating the electric heating elements and the fan only. For temperatures above 2°C, heating is obtained by means of a heat pump. The management of one or the other mode is completely automatic.



HEAT PUMP

Heat pump air conditioner. Thanks to this feature you can replace or support traditional heating in intermediate seasons.



CONDENSATION DRAIN
Mandatory.




FEATURES

- Two power models: 2.3 kW - 2.7 kW
- Available in the versions: HP (Heat Pump)
- Cooling class **A**
- Reclaimed R410A refrigerant gas
- Bottom installation recommended, for enhanced air distribution
- Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).
- Multifunction remote control

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Sleep function:** gradually increases the set temperature and ensures reduced noise for better night-time well-being.
- **24 H timer**

DIMENSIONS AND WEIGHT

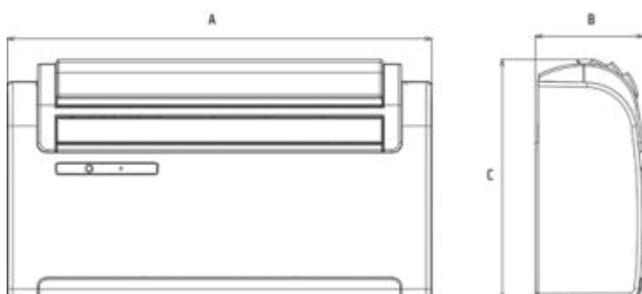

		10/12
A	mm	902
B	mm	229
C	mm	516
Weight	kg	40

TECHNICAL DATA			Unico R 10 HP	Unico R 12 HP
PRODUCT CODE			01495	01496
EAN CODE			8021183014952	8021183014969
Cooling power (min/max)		kW	-	-
Heating power (min/max)		kW	-	-
Nominal cooling capacity (1)	Prated	kW	2,3	2,7
Nominal heating capacity (1)	Prated	kW	2,3	2,5
Nominal power consumption for cooling (1)	PEER	kW	0,9	1,0
Nominal absorption for cooling (1)		A	3,70	4,30
Nominal power consumption for heating (1)	PCOP	kW	0,7	0,8
Nominal absorption for heating (1)		A	3,0	3,3
Nominal energy efficiency index (1)	EERd		2,6	2,6
Nominal efficiency coefficient (1)	COPd		3,1	3,1
Energy efficiency class in cooling (1)				
Energy efficiency class in heating (1)				
Energy consumption in "thermostat off" mode	PTO	W	14,0	14,0
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5	0,5
Energy consumption for double pipe appliances (1) - cooling function	QDD	kWh/h	0,9	1,0
Energy consumption for double pipe appliances (1) - heating function	QDD	kWh/h	0,7	0,8
Supply voltage		V-F-Hz	230-1-50	230-1-50
Supply voltage (min/max)		V	198 / 264	198 / 264
Maximum power consumption in cooling mode		kW	0,9	1,1
Maximum absorption in cooling mode		A	3,9	4,8
Maximum power consumption in heating mode		kW	0,9	1,1
Maximum absorption in heating mode		A	3,8	4,7
Maximum power consumption with electric resistance heating		kW	2,0	2,0
Maximum absorption with electric resistance heating		A	8,7	8,7
Dehumidification capacity		l/h	0,9	1,1
Air flow rate in cooling environment (max/med/min)		m³/h	490 / 430 / 360	490 / 430 / 360
Air flow rate in heating environment (max/med/min)		m³/h	410 / 350 / 270	490 / 400 / 330
Air flow rate with electric resistance heating environment		m³/h	490	490
External air flow rate in cooling (max/min)		m³/h	520 / 350	500 / 340
External air flow rate in heating (max/min)		m³/h	520 / 350	500 / 340
Internal ventilation speed			3	3
External ventilation speed			3	3
Diameter wall holes**		mm	162/202	162/202
Electric resistance heating		W	2000	2000
Maximum remote control range (distance/angle)		m / °	8 / ±80°	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	902 x 516 x 229	902 x 516 x 229
Dimensions (WxHxD) (with packaging)		mm	980 x 610 x 350	980 x 610 x 350
Weight (without packaging)		kg	40	40
Weight (with packaging)		kg	44	44
Internal sound pressure (min/max) (2)		dB(A)	33-41	33-42
Degree of protection provided by covers			IP 20	IP 20
Refrigerant gas*		Type	R410A reclaimed	R410A reclaimed
Global warming potential	GWP		2088	2088
Refrigerant gas charge		kg	0,65	0,55
Maximum operating pressure		MPa	3,6	3,6
Power cable (N° pole x section mm²)			3 x 1,5	3 x 1,5

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 24°C
	Minimum temperature in cooling	DB 18°C
	Maximum temperature in heating	DB 27°C
	Minimum temperature in heating	-
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C - WB 32°C
	Minimum temperature in cooling	-
	Maximum temperature in heating	DB 24°C - WB 18°C
	Minimum temperature in heating	DB -15°C

(1) Test conditions: the data refer to the EN14511 standard - HEATING MODE: Temperature: outdoor environment DB 7°C / WB 6°C; indoor environment DB 20°C / WB 19°C - COOLING MODE: outdoor ambient temperature DB 35°C / WB 24°C; indoor environment DB 27°C / WB 19°C

(2): Declaration of test data in a semi-anechoic chamber at a distance of 2m, minimum pressure in ventilation only.

* Hermetically sealed equipment containing fluorinated gas with GWP equivalent 2088.

** Unico R is supplied with 202 mm wall opening grilles. If necessary, to replace an old Unico, the machine can also be installed with holes of 162 mm in diameter.

Accessories

B1015

Kit Wi-Fi Unico

Wi-Fi/Bluetooth interface card.

Compatible with:

UNICO AIR	UNICO PRO (EVAN escluso)	UNICO R
UNICO EDGE	UNICO TOWER	



B1014

Wireless serial interface

Interface for receiving wireless commands (desired temperature, ventilation speed, air deflector operation and air change function) or via contacts (Cooling or Heating operating mode, ventilation speed). Presence sensor contact or Sleep mode. Alarm output in case of malfunction.

Compatible with:

UNICO AIR	UNICO PRO (EVAN escluso)	UNICO EASY
UNICO EDGE	UNICO TOWER	UNICO R



B1012

Wireless Wall Control

Battery-powered wall-mounted control for sending wireless commands (desired temperature, ventilation speed, air deflector operation).

Compatible with:

UNICO AIR	UNICO PRO (EVAN escluso)	UNICO EASY
UNICO EDGE	UNICO TOWER	UNICO R



B0776

Closing panel for recessed structure

Designed to completely camouflage the product within the architecture of the building.

Compatible with:

UNICO AIR



B0775

Recessed formwork kit

Supplied for quick installation and already prepared with holes for installation of the product.

Compatible with:

UNICO AIR



B0565

200mm diameter installation kit

1:1 scale installation template (valid for Unico Edge and Unico R), support bracket, PP universal sheets, pair of indoor flanges Ø 200 mm, pair of outdoor folding grilles Ø 200 mm.

Compatible with:

UNICO EDGE	UNICO R
UNICO TWIN	



B0984

Kit for preparing holes with a diameter of 200 mm

Kit for preparing holes with a diameter of 200 mm equipped with a pair of 200mm folding grids, a pair of 200mm internal flanges, a pair of universal PP sheets, templates for each compatible model (there are no support brackets, which are included in the machine packaging).

Compatible with:

UNICO EVO	UNICO PRO	UNICO R
UNICO EDGE	UNICO TWIN	



B0564

Grille kit diameter 160 mm

Pair of inside flanges Ø 160 mm, pair of outside folding grilles Ø 160 mm.

Compatible with:

UNICO EVO	UNICO PRO	UNICO EASY
UNICO AIR	UNICO TOWER	UNICO R
UNICO EDGE	UNICO TWIN	



B0620

Heating cable

To prevent the formation of ice in the condensation trap for drainage.

Compatible with:

UNICO EVO	UNICO EDGE	UNICO TWIN
UNICO AIR	UNICO PRO	UNICO R



B0753

200 mm rain cover kit

To be installed on the outside wall to protect the holes (for installations in extreme weather conditions). Designed for Ø 200 mm grilles. This product is available by special order only. The packaging contains 2 elements (1 for each hole).

Compatible with:

UNICO EVO	UNICO PRO	UNICO EASY
UNICO AIR	UNICO TWIN	
UNICO EDGE	UNICO R	



Wi-Fi Control

In-depth analysis on control from smartphones and tablets

Unico air conditioners without outdoor units can be controlled easily, inside and outside the home, even from smartphones and tablets. To activate them and set the main functions, simply download the iOS or Android application compatible with your air conditioner model and, if Wi-Fi is not integrated, request the installation of the dedicated interface card (code B1015 optional).



Olimpia Splendid Unico
This is the app available for the Unico Air, Unico Edge, Unico Pro (EVAN excluded), Unico Tower and Unico R models, in combination with the dedicated interface card (code B1015).



OS Home
This is the app available for the new generation of air conditioners, with integrated Wi-Fi, Unico Evo and Unico Pro (EVAN).



All applications allow you to manage one or more air conditioners without an outdoor unit installed in the house, to display the room temperature and to set the main modes (cooling, heating, dehumidification, ventilation), as well as to program the on and off timers.

Discover the new management and remote control potential of the Unico Evo and Unico Pro (EVAN) versions with integrated Wi-Fi on the Olimpiaspplendid.it website.



Built-in Unico




How to make the air conditioner invisible, inside and outside the home

Compatible with all Unico Air models

Unico Air is the slimmest air conditioner ever without outdoor unit. The reduced thickness (only 16 cm) makes it perfect for recessed installation, thus concealing the air conditioner, both inside and out. With the use of the special front panel and the formwork, it will finally be possible to completely hide the devices for home comfort.

RECESSED PANEL		
A	B	C
1173 mm	9 mm	754 mm

FORMWORK FOR RECESS		
A	B	C
1114 mm	171 mm	725 mm

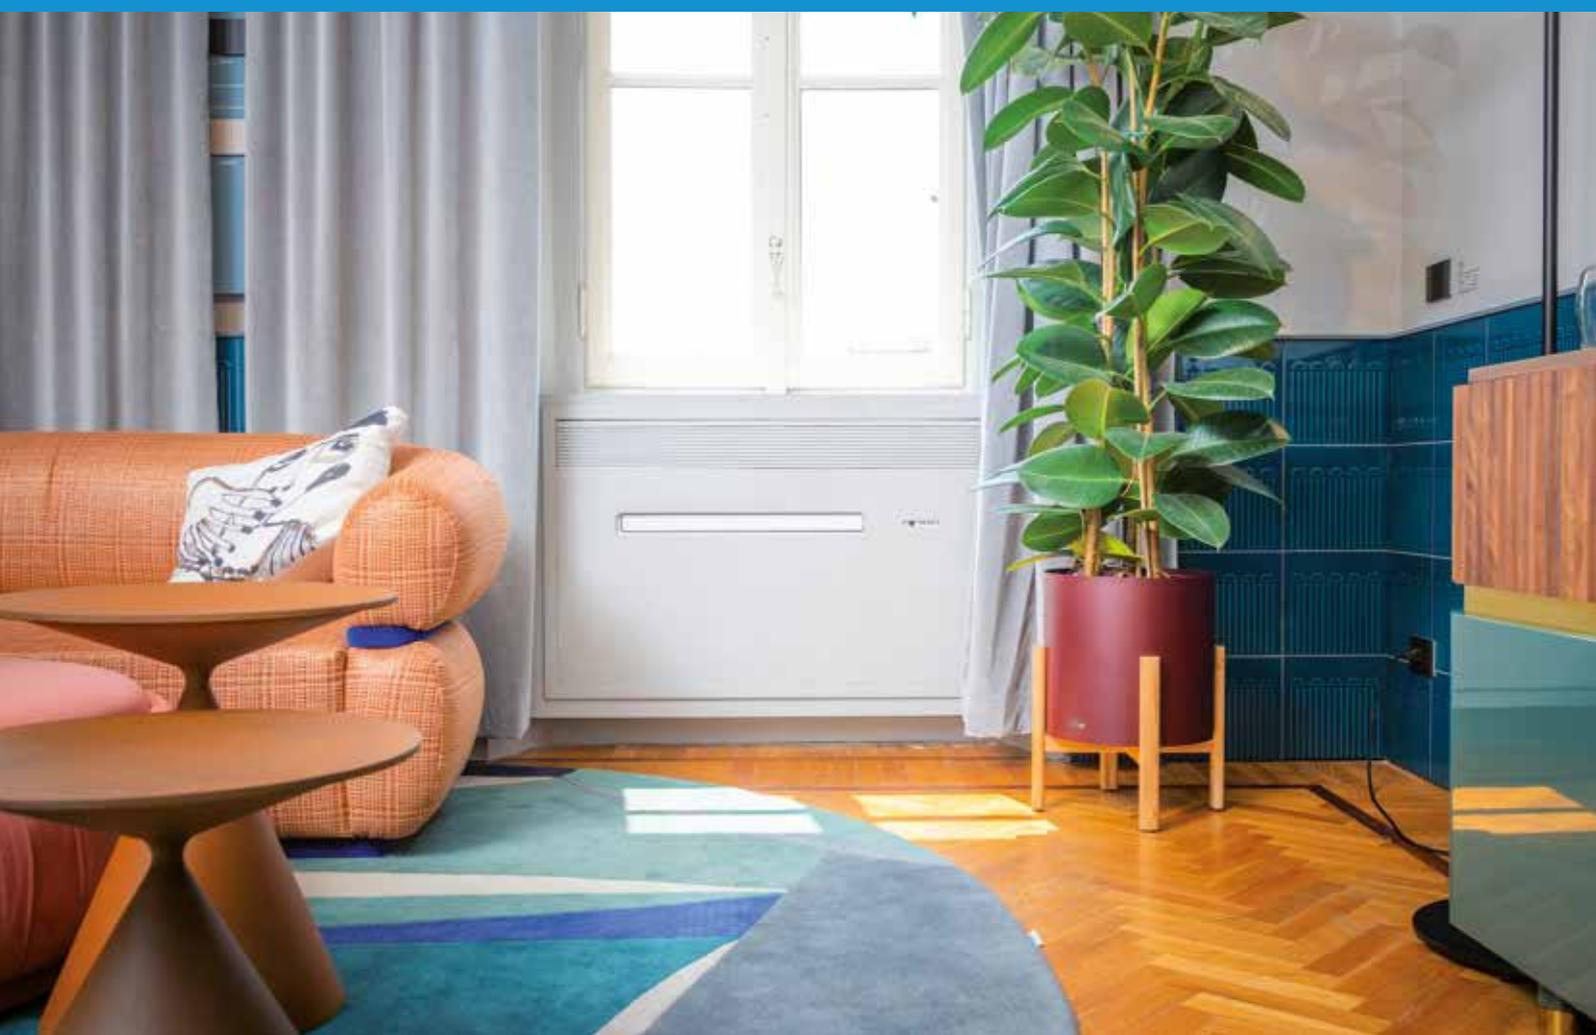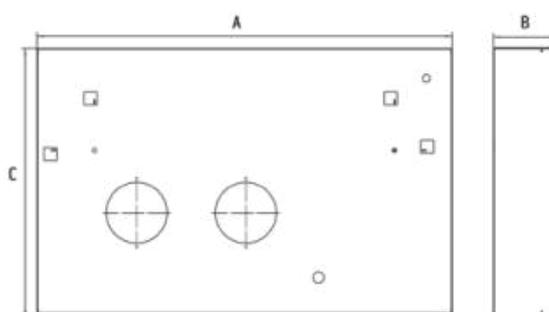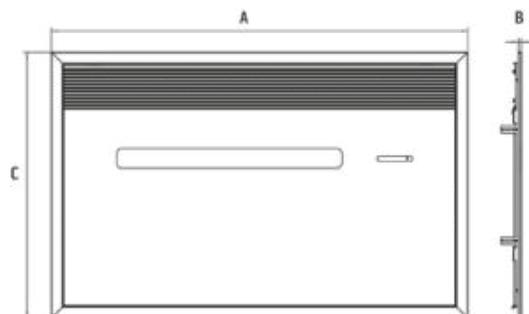



PORTABLES

MONO AND MULTISPLIT

UNICO

HRV

FAN COIL UNITS

HEAT PUMPS

BMS





NEXYA

Monosplit and multisplit air
conditioners



Maximum efficiency and complete air treatment

Olimpia Splendid's fixed air conditioning ranges offers a truly complete well-being


High efficiency e low GWP

The Olimpia Splendid air conditioners are among best performing in terms of energy efficiency (reaching up to a class of A+++) and use R32 refrigerant, which has a greenhouse effect reduced by almost 70% (compared to R410A).

Technologies for Indoor Air Quality

Good indoor air quality is an integral part of a comfortable, healthy and safe home, and the technological development of Olimpia Splendid is oriented at transforming air conditioners into increasingly advanced air treatment devices. This is why the internal units include cold catalyst filters, useful for inhibiting harmful gases (such as formaldehyde and benzene) and automatic high-temperature sterilisation functions. For climate comfort that is safer for everyone.



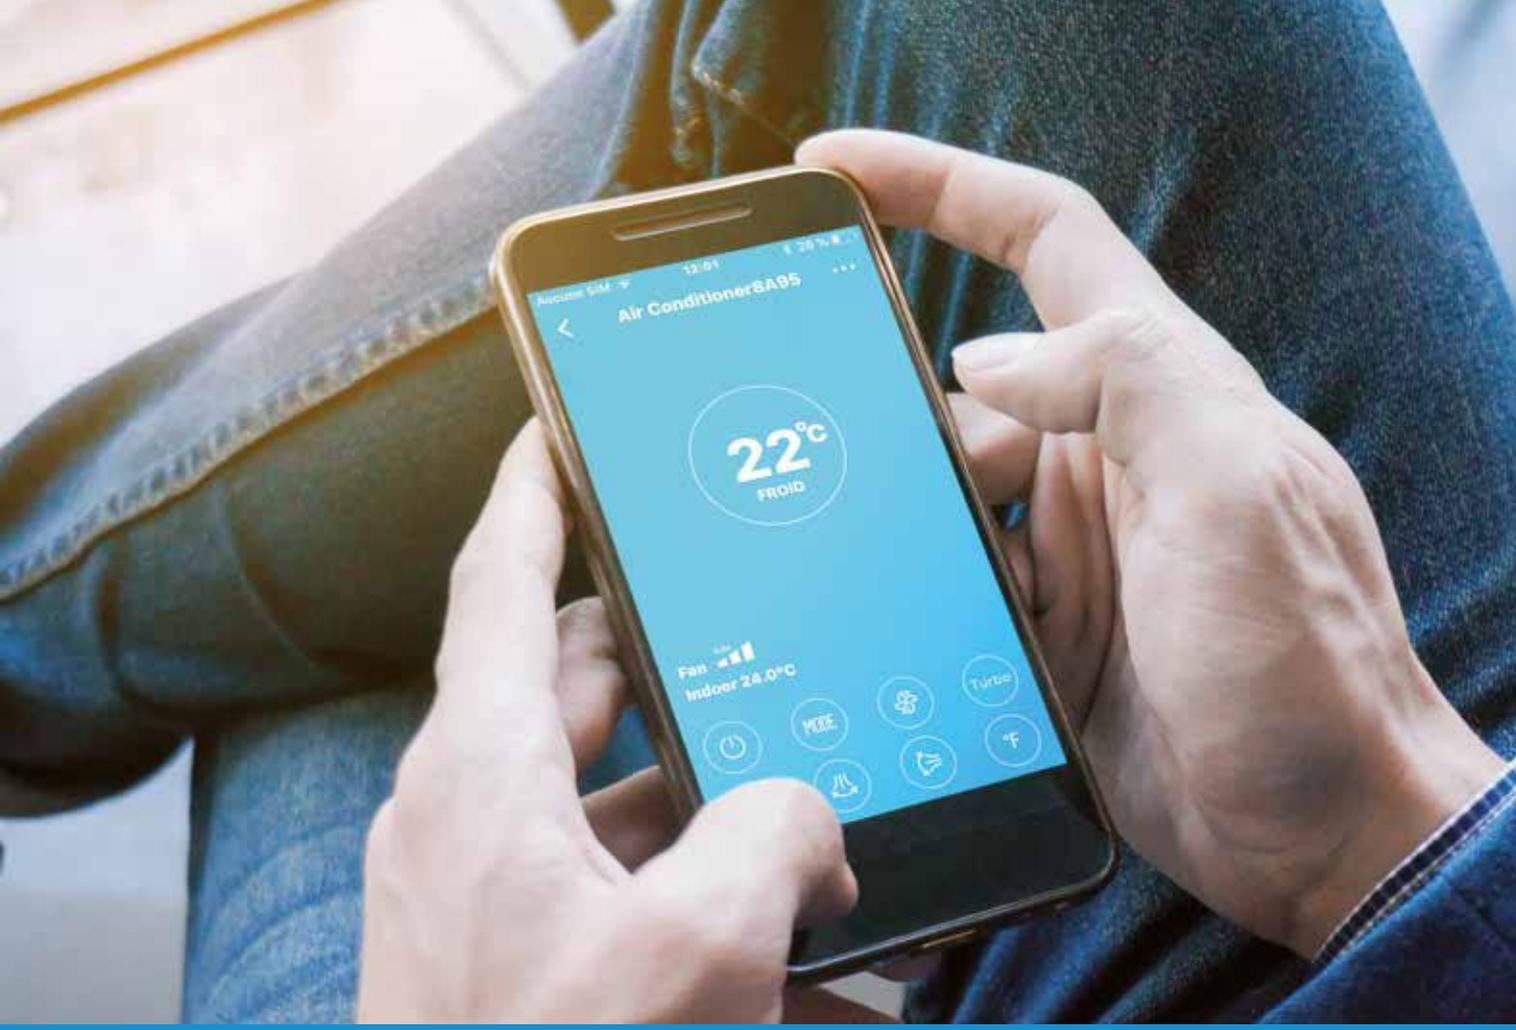

Wi-Fi kit: how to connect the air conditioner to your smartphone

Easy to install and set up

All the wall, duct, cassette and ceiling internal units of Olympia Splendid's fixed air conditioners can be fitted with Wi-Fi connectivity to manage the comfort settings remotely, out of the home, via the 3G and 4G network from your smartphone. There are two solutions available:

- Wi-Fi B1020 kit: consisting of a special USB key to insert independently in the dedicated port under the front panel. The kit is included with all the wall units while it is optional (to order) for all the cassette internal units, sizes 24, 36 single- and three-phase and 48 three-phase.
- Wi-Fi B0970 kit: consisting of a disc, to be installed outside the wall/ceiling internal unit, containing a USB key for Wi-Fi integration. The kit is optional (to order) for duct (sizes 9, 12, 18, 24, 36, 36T, 48T), ceiling (sizes 9, 12, 18, 24, 36, 36T, 48T) and cassette (sizes 9, 12, 18) indoor units.



OS Comfort is Olympia Splendid's application to control the air conditioner from your smartphone. Available for download on the Apple Store and Google Play.



App features

Available for iPhone and iPad with IOS Operating System and for smartphones and tablets with Android Operating System (compatibility indication available on Apple Store and Google Play). It is used to manage one or more air conditioners.

App functionality

- All modes can be set: heating, cooling, dehumidification, ventilation only, automatic
- Special functions can also be set: turbo, vertical and horizontal swing, echo
- Room temperature display
- Weekly timer with 1 time slot, with fixed modes and set points
- Frost protection: automatic activation of the air conditioner with ambient temperature below 8°C
- Sleep setting: possibility to manage the set point for each hour of the day

Monosplit and multisplit air conditioners

		SINGLE-PHASE ODU		
		9	12	
NEXYA ENERGY E High wall mono-split air conditioners		Outdoor units	UE Nexya Energy E 9 (OS-CEENH09EI)	UE Nexya Energy E 12 (OS-CEENH12EI)
		Indoor Units	UI Nexya Energy E 9 (OS-SEENH09EI)	UI Nexya Energy E 12 (OS-SEENH12EI)
		A+++ 	A+++ 	
NEXYA S4 E High wall mono-split air conditioners		Outdoor units	UE Nexya S4 E inverter 9 C (OS-KENEH09EI)	UE Nexya S4 E inverter 12 C (OS-KENEH12EI)
		Indoor Units	UI Nexya S4 E Inverter 9 (OS-SENEH09EI)	UI Nexya S4 E Inverter 12 (OS-SENEH12EI)
		A++ 	A++ 	
NEXYA COMMERCIAL DUCT Mono-split air conditioners for large rooms		Outdoor units		
		Indoor Units		
NEXYA COMMERCIAL CASSETTE Mono-split air conditioners for large rooms		Outdoor units		
		Indoor Units		
NEXYA COMMERCIAL CEILING Mono-split air conditioners for large rooms		Outdoor units		
		Indoor Units		
NEXYA MULTISPLIT Multisplit	Outdoor units	Dual 14	UE Nexya S5 E Dual inverter 14 (OS-CANMH14EI)	UE Nexya S5 E Dual inverter 18 (OS-CANMH18EI)
		Wall internal units	UI Nexya S4 E inverter 9 (OS-SENEH09EI)	UI Nexya S4 E inverter 9 (OS-SENEH09EI)
		UI Nexya S4 E inverter 12 (OS-SENEH12EI)	UI Nexya S4 E inverter 12 (OS-SENEH12EI)	
		UI Nexya S4 E inverter 18 (OS-SENEH18EI)	UI Nexya S4 E inverter 18 (OS-SENEH18EI)	
		Duct internal units	UI Nexya S5 E Duct 9 (OS-SANDH09EI)	UI Nexya S5 E Duct 9 (OS-SANDH09EI) NEW
		UI Nexya S5 E Duct 12 (OS-SANDH12EI)	UI Nexya S5 E Duct 12 (OS-SANDH12EI)	
		UI Nexya S5 E Duct 18 (OS-SANDH18EI)	UI Nexya S5 E Duct 18 (OS-SANDH18EI)	
		Cassette internal units	UI Nexya S5 E Cassette Compact 9 (OS-K/SANCH09EI)	UI Nexya S5 E Cassette Compact 9 (OS-K/SANCH09EI) NEW
		UI Nexya S5 E Cassette Compact 12 (OS-K/SANCH12EI)	UI Nexya S5 E Cassette Compact 12 (OS-K/SANCH12EI)	
		UI Nexya S5 E Cassette Compact 18 (OS-K/SANCH18EI)	UI Nexya S5 E Cassette Compact 18 (OS-K/SANCH18EI)	
		UI Nexya S5 E Cassette Compact 18 (OS-K/SANCH18EI)	UI Nexya S5 E Cassette Compact 18 (OS-K/SANCH18EI)	
		A++ 	A++ 	

Energy efficiency class in cooling depending on the reference operating conditions of each model. For multi-split units, the energy class listed here refers to the most efficient combination.

ODU THREE PHASE

18	24	36	36T	48T

UE Nexya S4 E inverter 18 C (OS-KENEH18EI)	UE Nexya S4 E inverter 24 C (OS-KENEH24EI) NEW			
UI Nexya S4 E Inverter 18 (OS-SENEH18EI)	UI Nexya S4 E inverter 24 (OS-SENEH24EI)			

A++  **A++** 

UE Nexya S5 E Commercial 18 (OS-CANCH18EI)	UE Nexya S5 E Commercial 24 (OS-CANCH24EI)	UE Nexya S5 E Commercial 36 (OS-CANCH36EI)	UE Nexya S5 E Commercial 36T (OS-CANCHT36EI)	UE Nexya S4 E Commercial 48T (OS-CECITH48EI)
UI Nexya S5 E Duct 18 (OS-SANDH18EI)	UI Nexya S5 E Duct 24 (OS-SANDH24EI)	UI Nexya S5 E Duct 36 (OS-SANDH36EI)		UI Nexya S5 E Duct 48 (OS-SANDH48EI)

A++  **A++**  **A++**  **A++**  **A++** 

UE Nexya S5 E Commercial 18 (OS-CANCH18EI)	UE Nexya S5 E Commercial 24 (OS-CANCH24EI)	UE Nexya S5 E Commercial 36 (OS-CANCH36EI)	UE Nexya S5 E Commercial 36T (OS-CANCHT36EI)	UE Nexya S5 E Commercial 48T (OS-CANCHT48EI)
UI Nexya S5 E Cassette Compact 18 (OS-K/SANCH18EI)	UI Nexya S5 E Cassette 24 (OS-K/SANCH24EI)	UI Nexya S5 E Cassette 36 (OS-K/SANCH36EI)		UI Nexya S5 E Cassette 48 (OS-K/SANCH48EI)

A++  **A++**  **A++**  **A++**  **A++** 

UE Nexya S5 E Commercial 18 (OS-CANCH18EI)	UE Nexya S5 E Commercial 24 (OS-CANCH24EI)	UE Nexya S5 E Commercial 36 (OS-CANCH36EI)	UE Nexya S5 E Commercial 36T (OS-CANCHT36EI)	UE Nexya S5 E Commercial 48T (OS-CANCHT48EI)
UI Nexya S5 E Ceiling 18 (OS-SANFH18EI)	UI Nexya S5 E Ceiling 24 (OS-SANFH24EI)	UI Nexya S5 E Ceiling 36 (OS-SANFH36EI)		UI Nexya S5 E Ceiling 48 (OS-SANFH48EI)

A++  **A++**  **A++**  **A++**  **A++** 

Trial 21		Quadri 28		Penta 42	
UE Nexya S5 E Trial inverter 21 (OS-CANMH21EI)		UE Nexya S4 E Quadri inverter 28 (OS-CEMYH28EI)		UE Nexya S5 E Penta inverter 42 (OS-CANMH42EI)	
UI Nexya S4 E inverter 9 (OS-SENEH09EI)		UI Nexya S4 E inverter 9 (OS-SENEH09EI)		UI Nexya S4 E inverter 9 (OS-SENEH09EI)	
UI Nexya S4 E inverter 12 (OS-SENEH12EI)		UI Nexya S4 E inverter 12 (OS-SENEH12EI)		UI Nexya S4 E inverter 12 (OS-SENEH12EI)	
UI Nexya S4 E inverter 18 (OS-SENEH18EI)		UI Nexya S4 E inverter 18 (OS-SENEH18EI)		UI Nexya S4 E inverter 18 (OS-SENEH18EI)	
UI Nexya S5 E Duct 9 NEW (OS-SANDH09EI)		UI Nexya S5 E Duct 9 NEW (OS-SANDH09EI)		UI Nexya S5 E Duct 9 NEW (OS-SANDH09EI)	
UI Nexya S5 E Duct 12 (OS-SANDH12EI)		UI Nexya S5 E Duct 12 (OS-SANDH12EI)		UI Nexya S5 E Duct 12 (OS-SANDH12EI)	
UI Nexya S5 E Duct 18 (OS-SANDH18EI)		UI Nexya S5 E Duct 18 (OS-SANDH18EI)		UI Nexya S5 E Duct 18 (OS-SANDH18EI)	
UI Nexya S5 E Cassette Compact 9 NEW (OS-K/SANCHO9EI)		UI Nexya S5 E Cassette Compact 9 NEW (OS-K/SANCHO9EI)		UI Nexya S5 E Cassette Compact 9 NEW (OS-K/SANCHO9EI)	
UI Nexya S5 E Cassette Compact 12 (OS-K/SANCH12EI)		UI Nexya S5 E Cassette Compact 12 (OS-K/SANCH12EI)		UI Nexya S5 E Cassette Compact 12 (OS-K/SANCH12EI)	
UI Nexya S5 E Cassette Compact 18 (OS-K/SANCH18EI)		UI Nexya S5 E Cassette Compact 18 (OS-K/SANCH18EI)		UI Nexya S5 E Cassette Compact 18 (OS-K/SANCH18EI)	

A++  **A++**  **A++** 

NEXYA ENERGY E

High-wall mono-split inverter in class A+++



HIGH EFFICIENCY

High-performance R32 refrigerant gas with maximum technological efficiency, up to energy class A+++.



STERILISATION AT 56°C

High temperature sterilisation cycles of the evaporator to prevent bacteria from forming and to improve the quality of air.



IONIZER AND AIR QUALITY TECH

The treated air is subjected to an ionising action and purified with anti-dust filters, activated carbon and cold catalytic filters.



WI-FI KIT INCLUDED

To ensure Wi-Fi connection to the air conditioner, simply install the special USB key (included in the package) and download the OS Comfort app.



FEATURES

- High-performance inverter technology
- Coolant gas R32
- Energy efficiency class A+++ in cooling
- Remote control supplied
- Golden Fin treatment on the battery of the outdoor unit, to prevent the corrosive action of atmospheric agents and improve performance efficiency.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Timer, Auto, Eco, Sleep, Silent and Turbo functions**
- **Follow Me function:** precise temperature detection in the point where the remote control is located.
- **Breeze away and Swing functions:** prevents direct air jets and automatically adjusts the air flow (horizontal and vertical)
- **Gear function:** 3 power options (50-75-100%) to optimise energy consumption.
- **Auto-Restart function:** after a power failure, it restarts at the last function set.
- **Auto-Diagnosis function:** in the event of a failure, the display shows the error code.



				Nexya Energy E 9	Nexya Energy E 12
PRODUCT CODE				OS-C/SEENH09EI	OS-C/SEENH12EI
EAN CODE				8021183118728	8021183118759
Output power in cooling mode (min/rated/max)			kW	1,03/2,64/3,23	1,38/3,52/4,31
Output power in heating mode (min/rated/max)			kW	0,82/2,93/3,37	1,07/3,81/4,38
Absorbed power in cooling mode (min/rated/max)			kW	0,08/0,63/1,10	0,13/1,01/1,65
Absorbed power in heating mode (min/rated/max)			kW	0,70/0,65/0,99	0,16/0,98/1,56
Current consumption in cooling mode (min/rated/max)			A	0,35/2,73/4,78	0,6/4,37/7,2
Current consumption in heating mode (min/rated/max)			A	0,32/2,83/4,32	0,7/4,24/6,78
EER				4,2	3,5
COP				4,5	3,9
Maximum power consumption in cooling mode			kW	2,20	2,20
Maximum power consumption in heating mode			kW	2,20	2,20
Energy efficiency class in cooling				A+++	A+++
Energy efficiency class in heating mode - Average season				A++	A++
Energy efficiency class in heating mode - Warmer season				A+++	A+++
Energy efficiency class in heating mode - Cold season				-	-
Energy consumption in cooling mode		kWh/year	kWh/year	107	157
Annual energy consumption in heating mode - Average season		kWh/year	kWh/year	744	797
Annual energy consumption in heating mode - Warmer season		kWh/year	kWh/year	630	723
Annual energy consumption in heating mode - Cold season			kWh/year	1891	1984
Dehumidification capacity			l/h	1,5	1,5
DESIGN LOAD (EN 14825)	Cooling	Pdesignc	kW	2,6	3,5
	Heating / Average	Pdesignh	kW	2,4	2,6
	Heating / Warmer	Pdesignh	kW	2,7	3,1
	Heating / Colder	Pdesignh	kW	3	3,3
SEASONAL EFFICIENCY (EN14825)	Cooling	SEER		8,8	8,5
	Heating / Average	SCOP (A)		4,6	4,6
	Heating / Warmer	SCOP (W)		6	6
	Heating / Colder	SCOP (C)		3,5	3,5
INDOOR UNIT	Sound power (EN 12102)	LWA	dB(A)	54	55
	Sound pressure (max/med/min/silence)		dB(A)	37/31/22/-	39/33/22/-
	Air flow rate in cooling mode (max/med/min)		m³/h	510/360/300	520/370/310
	Air flow rate in heating mode (max/med/min)		m³/h	510/360/300	520/370/310
	Degree of protection			/	/
	Dimensions (WxHxD) (without packaging)		mm	835x295x208	835x295x208
	Weight (without packaging)		kg	8,7	8,7
	Dimensions (WxHxD) (with packaging)		mm	905x355x290	905x355x290
	Weight (with packaging)		kg	11,5	11,3
	OUTDOOR UNIT	Sound power (EN 12102)	LWA	dB(A)	58
Sound pressure			dB(A)	54	54,5
Air flow rate (max)			m³/h	2150	2200
Degree of protection				IP24	IP24
Dimensions (WxHxD) (without packaging)			mm	765x555x303	765x555x303
Weight (without packaging)			kg	26,7	26,7
Dimensions (WxHxD) (with packaging)			mm	887x610x337	887x610x337
Weight (with packaging)			kg	29,1	29,1
COOLING CIRCUIT	Connecting liquid pipeline diameter		inch - mm	1/4" - 6,35	1/4" - 6,35
	Connecting gas pipeline diameter		inch - mm	3/8" - 9,52	3/8" - 9,52
	Maximum piping length		m	25	25
	Maximum height difference		m	10	10
	Covered piping length from pre-load		m	5	5
	Piping recommended minimum length		m	3	3
	Refrigerant increase (over 5 m of pipes)		g/m	12	12
	Maximum operating pressure		MPa	4,3/1,7	4,3/1,7
	Refrigerant gas*	Type	Type	R32	R32
	Global warming potential	GWP		675	675
ELECTRICAL CONNECTIONS	Refrigerant gas charge		kg	0,62	0,62
	Supply voltage indoor unit		V/F/Hz	220-240 / 1 / 50	220-240 / 1 / 50
	Supply voltage outdoor unit		V/F/Hz	220-240 / 1 / 50	220-240 / 1 / 50
	Outdoor unit power supply connection	Pipes		3 x 2,5 mm2	3 x 2,5 mm2
	Indoor - Outdoor unit connection	Pipes		5 x 1,5 mm2	5 x 1,5 mm2
	Max Current		A	10,5	10,5
LIMITS OF OPERATING CONDITIONS					
Indoor ambient temperature	Maximum temperature in cooling			DB 32°C	
	Minimum temperature in cooling			DB 16°C	
	Maximum temperature in heating			DB 30°C	
	Minimum temperature in heating			DB 0°C	
Outdoor ambient temperature	Maximum temperature in cooling			DB 50°C	
	Minimum temperature in cooling			-	
	Maximum temperature in heating			DB 24°C	
	Minimum temperature in heating			DB -15°C	

The declared data relate to the conditions provided for in EN 14511, EN 14825 and EU Delegated Regulation 626/2011. The actual power consumption of the product, in conditions of real use, may differ from what is indicated. The data are subject to change and modification without prior notice.

*Non-hermetically sealed equipment containing fluorinated gas with GWP equivalent to 675.

NEXYA S4 E

High-wall mono-split inverter in class A++



HIGH EFFICIENCY

High-performance R32 refrigerant gas with maximum technological efficiency, to reach the energy class A++.



AIR QUALITY TECH

The treated air is purified with anti-dust filters, activated carbon and cold catalytic filters to remove impurities.



SELF CLEAN

Automatically cleans and dries the evaporator, removing dust, mould and grease to ensure clean air in the room.



WI-FI KIT INCLUDED

To ensure Wi-Fi connection to the air conditioner, simply install the special USB key (included in the package) and download the OS Comfort app.



FEATURES

- High-performance inverter technology
- Coolant gas R32
- Energy efficiency class A++ in cooling
- Remote control supplied
- Golden Fin treatment on the battery of the outdoor unit, to prevent the corrosive action of atmospheric agents and improve performance efficiency.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Timer, Auto, Sleep, Silent and Turbo functions**
- **Follow Me function:** precise temperature detection in the point where the remote control is located.
- **Swing function:** oscillation of the flap for better air diffusion in the environment.
- **Auto-Restart function:** after a power failure, it restarts at the last function set.
- **Auto-Diagnosis function:** in the event of a failure, the display shows the error code.



				Nexya S4 E Inverter 9 C	Nexya S4 E Inverter 12 C	Nexya S4 E Inverter 18 C	Nexya S4 E Inverter 24 C
PRODUCT CODE				OS-K/SENEH09E1	OS-K/SENEH12E1	OS-K/SENEH18E1	OS-K/SENEH24E1
EAN CODE				8021183117462	8021183117479	8021183118803	8021183118810
Output power in cooling mode (min/rated/max)		kW	0,91/2,64/3,40	1,11/3,40/4,16	3,39/5,27/5,83	2,08/5,86/7,91	
Output power in heating mode (min/rated/max)		kW	0,82/2,93/3,37	1,09/3,68/4,22	3,1/4,97/5,85	1,61/6,0/7,91	
Absorbed power in cooling mode (min/rated/max)		kW	0,10/0,73/1,24	0,13/1,04/1,58	0,56/1,55/2,05	0,42/1,78/3,15	
Absorbed power in heating mode (min/rated/max)		kW	0,12/0,73/1,20	0,10/0,99/1,68	0,78/1,298/2	0,3/1,608/2,75	
Current consumption in cooling mode (min/rated/max)		A	0,40/3,20/5,40	0,5/4,56/6,9	2,4/6,7/8,9	1,8/7,7/13,8	
Current consumption in heating mode (min/rated/max)		A	0,50/3,20/5,20	0,4/4,35/6,9	3,4/5,64/8,7	1,3/6,99/12,2	
EER			3,60	3,28	3,4	3,28	
COP			4,00	3,72	3,83	3,73	
Maximum power consumption in cooling mode		kW	2,15	2,15	2,50	3,50	
Maximum power consumption in heating mode		kW	2,15	2,15	2,50	3,50	
Energy efficiency class in cooling			A++	A++	A++	A++	
Energy efficiency class in heating mode - Average season			A+	A+	A+	A+	
Energy efficiency class in heating mode - Warmer season			A+++	A+++	A+++	A+++	
Energy efficiency class in heating mode - Cold season			-	-	-	-	
Energy consumption in cooling mode		kWh/year	156	211	247	405	
Annual energy consumption in heating mode - Average season		kWh/year	910	945	1435	1818	
Annual energy consumption in heating mode - Warmer season		kWh/year	714	706	1208	1691	
Annual energy consumption in heating mode - Cold season		kWh/year	-	-	-	-	
Dehumidification capacity		l/h	1	1,2	1,6	2,4	
DESIGN LOAD (EN 14825)	Cooling	Pdesignc	kW	2,8	3,6	5,2	7
	Heating / Average	Pdesignh	kW	2,6	2,7	4,1	4,8
	Heating / Warmer	Pdesignh	kW	2,6	2,5	4,4	5,8
	Heating / Colder	Pdesignh	kW	-	-	-	-
SEASONAL EFFICIENCY (EN14825)	Cooling	SEER		6,3	6,1	7,4	6,1
	Heating / Average	SCOP (A)		4,0	4,0	4	4
	Heating / Warmer	SCOP (W)		5,1	5,1	5,1	4,8
	Heating / Colder	SCOP (C)		-	-	-	-
INDOOR UNIT	Sound power (EN 12102)	LWA	dB(A)	54	55	56	59
	Sound pressure (max/med/min/silence)		dB(A)	39/32/25/-	41/35/25/-	42/36/26/-	45/40/36/-
	Air flow rate in cooling mode (max/med/min)		m³/h	466/360/325	547/430/314	840/680/540	980/817/662
	Air flow rate in heating mode (max/med/min)		m³/h	466/360/325	625/430/314	840/680/540	980/817/662
	Degree of protection			IPX0	IPX0	IPX0	IPX0
	Dimensions (WxHxD) (without packaging)		mm	805x285x194	805x285x194	957x302x213	1040x327x220
	Weight (without packaging)		kg	7,6	7,6	10	12,3
	Dimensions (WxHxD) (with packaging)		mm	870x365x270	870x365x270	1035x385x295	1120x405x315
	Weight (with packaging)		kg	9,7	9,8	13,0	15,8
OUTDOOR UNIT	Sound power (EN 12102)	LWA	dB(A)	62	63	63	67
	Sound pressure		dB(A)	55,5	56	56	59
	Air flow rate (max)		m³/h	1750	1800	2100	3500
	Degree of protection			IP24	IP24	IPX4	IPX4
	Dimensions (WxHxD) (without packaging)		mm	720x495x270	720x495x270	805x554x330	890x673x342
	Weight (without packaging)		kg	23,2	23,2	32,7	42,9
	Dimensions (WxHxD) (with packaging)		mm	835x540x300	835x540x300	915x615x370	995x740x398
	Weight (with packaging)		kg	25,0	25,0	35,4	45,9
COOLING CIRCUIT	Connecting liquid pipeline diameter		inch - mm	1/4" - 6,35	1/4" - 6,35	1/4" - 6,35	3/8" - 9,52
	Connecting gas pipeline diameter		inch - mm	3/8" - 9,52	3/8" - 9,52	1/2" - 12,7	5/8" - 15,9
	Maximum piping length		m	25	25	30	50
	Maximum height difference		m	10	10	20	25
	Covered piping length from pre-load		m	5	5	5	5
	Piping recommended minimum length		m	3	3	3	3
	Refrigerant increase (over 5 m of pipes)		g/m	12	12	12	24
	Maximum operating pressure		MPa	4,3/1,7	4,3/1,7	4,3/1,7	4,3/1,7
	Refrigerant gas*	Type		R32	R32	R32	R32
	Global warming potential	GWP		675	675	675	675
	Refrigerant gas charge		kg	0,55	0,55	1,08	1,42
ELECTRICAL CONNECTIONS	Supply voltage indoor unit		V/F/Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
	Supply voltage outdoor unit		V/F/Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
	Outdoor unit power supply connection	Pipes		3 x 2,5 mm2	3 x 2,5 mm2	3 x 2,5 mm2	3 x 2,5 mm2
	Indoor - Outdoor unit connection	Pipes		5 x 1,5 mm2	5 x 1,5 mm2	5 x 1,5 mm2	5 x 2,5 mm2
Max Current		A	10,0	10,0	13,0	15,5	

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 32°C	DB 32°C	DB 32°C	DB 32°C
	Minimum temperature in cooling	DB 17°C	DB 17°C	DB 17°C	DB 17°C
	Maximum temperature in heating	DB 30°C	DB 30°C	DB 30°C	DB 30°C
	Minimum temperature in heating	DB 0°C	DB 0°C	DB 0°C	DB 0°C
Outdoor ambient temperature	Maximum temperature in cooling	DB 43°C	DB 43°C	DB 50°C	DB 50°C
	Minimum temperature in cooling	-	-	-	-
	Maximum temperature in heating	DB 30°C	DB 30°C	DB 30°C	DB 30°C
	Minimum temperature in heating	DB -15°C	DB -15°C	DB -15°C	DB -15°C

The declared data relate to the conditions provided for in EN 14511, EN 14825 and EU Delegated Regulation 626/2011. The actual power consumption of the product, in conditions of real use, may differ from what is indicated. The data are subject to change and modification without prior notice.

*Non-hermetically sealed equipment containing fluorinated gas with GWP equivalent to 675.

NEXYA COMMERCIAL DUCT

Inverter mono-split air conditioners ducted for large rooms



HYDRAULIC HEAD

Centralised indoor unit with static pressure available up to 160 Pa.



SLIM DESIGN

The range is characterised by its small dimensions (Height from 210 mm)



AUTOMATIC SETTING OF THE AIR FLOW RATE

The system adapts automatically according to the ducts connected to the unit.



DIGITAL DISPLAY

Display on the outside of the internal unit to guarantee the best signal reception from the remote control (*Except for size 48T, which comes with the B0969 wall-mounted wire control).



FEATURES

Energy-efficient inverter technology with low-GWP R32 refrigerant gas.

Optimum performance and high efficiency at low airflow resulting in reduced noise.

Automatic air flow rate setting

Innovative automatic air flow setting function, so that the system automatically adapts according to the ducting connected to the unit.

Reversible air intake

The air intake duct can be moved from the rear of the product (standard configuration) to the bottom, replacing it with a sheet metal panel. This makes the product suitable for all installation conditions.

Fresh air inlet

The internal units of the commercial line are fitted with specific air inlets to introduce fresh or outdoor air into the product.

Condensation lift pump

The internal units are fitted with a condensation pump.

Remote ON-OFF

All units in the commercial line are fitted with terminals to control the remote switching on and off of the unit via an external device.

Contact alarm

The units in the commercial line have a contact that allows the alarm status of the product to be synchronised with an external device.

Hydrophilic Aluminium coating

Suitable for installation in coastal or particularly humid areas, thanks to its excellent anti-corrosion properties. With equivalent environmental conditions, the new coating of the condensers guarantees a durability that is 7 times greater than that of the traditional models.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Auto, Sleep* and Turbo* functions**
- **24h timer:** for scheduling switch on and off.
- **Follow Me function:** precise temperature detection at the remote control location.
- **Gear function*:** 3 power options (50-75-100%) to optimise energy consumption.
- **Short cut function*:** to automatically return to the previous settings.
- *Functions not compatible for size 48T

				Nexya S5 E Duct 18	Nexya S5 E Duct 24	Nexya S5 E Duct 36	Nexya S5 E Duct 36T	Nexya S4 E Duct 48T*
INDOOR UNIT CODE				OS-SANDH18E1	OS-SANDH24E1	OS-SANDH36E1	OS-SANDH36E1	OS-SANDH48E1
INDOOR UNIT EAN CODE				8021183119152	8021183119169	8021183119176	8021183119176	8021183119183
OUTDOOR UNIT CODE				OS-CANCH18E1	OS-CANCH24E1	OS-CANCH36E1	OS-CANCH36E1	OS-CECITH48E1
OUTDOOR UNIT EAN CODE				8021183119053	8021183119060	8021183119077	8021183119084	8021183116175
Output power in cooling mode (min/rated/max)		kW	2,55/5,275/5,86	3,28/7,034/8,16	2,75/9,958/11,14	2,73/9,974/11,78	4,26/14,07/15,19	
Output power in heating mode (min/rated/max)		kW	2,20/5,569/6,15	2,81/7,62/8,49	2,78/11,723/12,78	2,78/11,245/12,84	3,7/16,12/18,02	
Absorbed power in cooling mode (min/rated/max)		kW	0,71/1,53/2,15	0,75/2,178/2,96	0,9/3,041/4,15	0,89/3,04/4,2	1,17/5,15/5,70	
Absorbed power in heating mode (min/rated/max)		kW	0,74/1,501/1,76	0,64/1,9/2,58	0,8/3,16/3,95	0,78/2,877/4	0,95/4,28/5,83	
Current consumption in cooling mode (min/rated/max)		A	3,2/7,1/9,56	4,2/10,2/13,2	4,2/17,5/18,5	1,4/6,5/6,7	1,8/8,3/9,4	
Current consumption in heating mode (min/rated/max)		A	3,3/6,8/7,7	3,8/9,2/11,6	3,5/14,5/17,5	1,3/5,3/6,4	1,5/6,8/9,2	
EER			3,45	3,23	3,27	3,28	2,73	
COP			3,71	4,01	3,71	3,91	3,77	
Maximum power consumption in cooling mode		kW	2,95	3,7	5	5	6,2	
Maximum power consumption in heating mode		kW	2,95	3,7	5	5	6,2	
Energy efficiency class in cooling			A++	A++	A++	A++	A++	
Energy efficiency class in heating mode - Average season			A+	A+	A+	A+	A+	
Energy efficiency class in heating mode - Warmer season			A+++	A+++	A+++	A+++	A+++	
Energy efficiency class in heating mode - Cold season			/	/	/	/	/	
Energy consumption in cooling mode	kWh/year	kWh/year	291	401	593	608	808	
Annual energy consumption in heating mode - Average season	kWh/year	kWh/year	1505	1890	2940	3080	4263	
Annual energy consumption in heating mode - Warmer season	kWh/year	kWh/year	1434	1647	2690	2745	2949	
Annual energy consumption in heating mode - Cold season	kWh/year	kWh/year	/	/	/	/	/	
Dehumidification capacity		l/h	1,87	2,34	3,54	4,19	/	
DESIGN LOAD (EN 14825)	Cooling	Pdesignc	kW	5,4	7,1	10,5	10,6	14,0
	Heating / Average	Pdesignh	kW	4,3	5,4	8,4	8,8	12,1
	Heating / Warmer	Pdesignh	kW	5,2	6	9,8	10	10,7
	Heating / Colder	Pdesignh	kW	/	/	/	/	/
SEASONAL EFFICIENCY (EN14825)	Cooling	SEER		6,5	6,2	6,2	6,1	6,1
	Heating / Average	SCOP (A)		4	4	4	4	4
	Heating / Warmer	SCOP (W)		5,1	5,1	5,1	5,1	5,1
	Heating / Colder	SCOP (C)		/	/	/	/	/
INDOOR UNIT	Sound power (EN 12102)	LWA	dB(A)	58	61	61	61	66
	Sound pressure (max/med/min/silence)		dB(A)	41/38/34/26	42/40/37/27	49/48/46/42	49/48/46/42	50/49/47/42
	Air flow rate in cooling mode (max/med/min)		m³/h	911-706-515	1229-1035-825	2100-1800-1500	2100-1800-1500	2400-2040-1680
	Air flow rate in heating mode (max/med/min)		m³/h	911-706-515	1229-1035-825	2100-1800-1500	2100-1800-1500	2400-2040-1680
	Rated fan pressure		Pa	25	25	37	37	50
	Fan pressure adjustment field		Pa	0-100	0-160	0-160	0-160	0-160
	Degree of protection			/	/	/	/	/
	Dimensions (WxHxD) (without packaging)		mm	880x210x674	1100x249x774	1360x249x774	1360x249x774	1200x300x874
	Weight (without packaging)		kg	24,4	32,3	40,5	40,5	47,6
	Dimensions (WxHxD) (with packaging)		mm	1070x280x725	1305x315x805	1570x330x805	1570x330x805	1405x365x915
	Weight (with packaging)		kg	29,6	39,1	48,2	48,2	55,8
OUTDOOR UNIT	Sound power (EN 12102)	LWA	dB(A)	65	67	70	70	72
	Sound pressure		dB(A)	56	60	63	63	66
	Air flow rate (max)		m³/h	2100	3500	4000	4000	7500
	Degree of protection			/	/	/	/	/
	Dimensions (WxHxD) (without packaging)		mm	805x554x330	890x673x342	946x810x410	946x810x410	952x1333x415
	Weight (without packaging)		kg	32,5	43,9	66,9	80,5	106,7
	Dimensions (WxHxD) (with packaging)		mm	915x615x370	995x740x398	1090x885x500	1090x885x500	1090x1480x495
Weight (with packaging)		kg	35,2	46,9	71,5	85	119,9	
COOLING CIRCUIT	Connecting liquid pipeline diameter		inch - mm	1/4" - 6,35	3/8" - 9,52	3/8" - 9,52	3/8" - 9,52	3/8" - 9,52
	Connecting gas pipeline diameter		inch - mm	1/2" - 12,7	5/8" - 15,9	5/8" - 15,9	5/8" - 15,9	5/8" - 15,9
	Maximum piping length		m	30	50	75	75	65
	Maximum height difference		m	20	25	30	30	30
	Covered piping length from pre-load		m	5	5	5	5	5
	Piping recommended minimum length		m	3	3	3	3	3
	Refrigerant increase (over 5 m of pipes)		g/m	12	24	24	24	24
	Maximum operating pressure		MPa	4,3-1,7	4,3-1,7	4,3-1,7	4,3-1,7	4,3-1,7
	Refrigerant gas*	Type	Type	R32	R32	R32	R32	R32
	Global warming potential	GWP		675	675	675	675	675
Refrigerant gas charge		kg	1,15	1,5	2,4	2,4	2,8	
ELECTRICAL CONNECTIONS	Supply voltage indoor unit		V/F/Hz	One Phase 220-240 / 1 / 50				
	Supply voltage outdoor unit		V/F/Hz	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	Three-phase 380-415/3/50	Three-phase 380-415/3/50
	Outdoor unit power supply connection	Pipes		3 x 2,5 mm2				
	Indoor - Outdoor unit connection	Pipes		4 x 1 mm2				
	Max Current	A		13,5	19	22,5	10	11,2
LIMITS OF OPERATING CONDITIONS								
Indoor ambient temperature	Maximum temperature in cooling						DB 32°C	
	Minimum temperature in cooling						DB 17°C	
	Maximum temperature in heating						DB 30°C	
	Minimum temperature in heating						DB 0°C	
Outdoor ambient temperature	Maximum temperature in cooling						DB 50°C	
	Minimum temperature in cooling						-	
	Maximum temperature in heating						DB 24°C	
	Minimum temperature in heating						DB -15°C	

The declared data relate to the conditions provided for in EN 14511, EN 14825 and EU Delegated Regulation 626/2011. The actual power consumption of the product, in conditions of real use, may differ from what is indicated. The data are subject to change and modification without prior notice. Dehumidification values refer to DB 27°C WB 19°C conditions.

The sound pressure values are measured under the following conditions: in semi-anechoic chamber, unit positioned in a free space, measuring device positioned 1.5 metres below the internal unit to which standard ducting of 2 metres (supply) and 1 metre (return) are attached.

The sound pressure values of the outdoor units are at the following conditions: in a semi-anechoic chamber, unit positioned in free space, measuring device positioned at a distance of 1 metre (outdoor unit).

*Non-hermetically sealed equipment containing fluorinated gases with GWP equivalent of 675.

NEXYA COMMERCIAL CASSETTE

False ceiling-mounted inverter mono-split air conditioners ducted for large rooms



HIGH EFFICIENCY

High-performance R32 refrigerant gas with maximum technological efficiency, to reach the energy class A++.



DECORATIVE PANEL

Equipped with a digital display, it has vents for the ejection of air even at the corners. For greater climate comfort.



COMPACT DESIGN

Reduced dimensions up to 600x600, in the compact version.



INDEPENDENT BLADE CONTROL

Independent flap control for greater climate comfort, in sizes from 24 up to 48.



FEATURES

Two models

Compact cassettes (with slimline width and length dimensions of only 600x600 mm) and cassettes (with width and length dimensions of more than 600x600 mm and slimline height from 205 mm).

Fresh air inlet

The internal units of the commercial line are fitted with specific air inlets to introduce fresh or outdoor air into the product.

Condensation lift pump

The internal units are fitted with a condensation pump.

Remote ON-OFF

All units in the commercial line are fitted with terminals to control the remote switching on and off of the unit via an external device.

Contact alarm

The units in the commercial line have a contact that allows the alarm status of the product to be synchronised with an external device.

Hydrophilic Aluminium coating

Suitable for installation in coastal or particularly humid areas, thanks to its excellent anti-corrosion properties. With equivalent environmental conditions, the new coating of the condensers guarantees them a longevity exceeding 7 times that of the traditional models.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Auto, Co, Sleep, Silent and Turbo functions**
- **24h timer:** for scheduling switch on and off.
- **Follow Me function:** precise temperature detection at the remote control location.
- **Gear function:** 3 power options (50-75-100%) to optimise energy consumption.
- **Short cut function:** to automatically return to the previous settings.
- **Anti dust filter:** to capture dust and pollen.
- **Self-Clean function:** automatically cleans and dries the evaporator eliminating dust, mould and grease to ensure clean air in the room.

		Nexya S5 E Cassette Compact 18	Nexya S5 E Cassette 24	Nexya S5 E Cassette 36	Nexya S5 E Cassette 36T	Nexya S5 E Cassette 48T		
INDOOR UNIT CODE		OS-K/SANCH18E1	OS-K/SANCH24E1	OS-K/SANCH36E1	OS-K/SANCH36E1	OS-K/SANCH48E1		
INDOOR UNIT EAN CODE		8021183119336	8021183119343	8021183119350	8021183119350	8021183119367		
OUTDOOR UNIT CODE		OS-CANCH18E1	OS-CANCH24E1	OS-CANCH36E1	OS-CANCH36E1	OS-CANCH48E1		
OUTDOOR UNIT EAN CODE		8021183119053	8021183119060	8021183119077	8021183119084	8021183119091		
Output power in cooling mode (min/rated/max)		kW	2,9/5,28/5,59	3,3/6,155/7,91	2,7/9,952/11,43	2,7/10,01/11,43	3,52-14,07-15,83	
Output power in heating mode (min/rated/max)		kW	2,37/5,18/6,10	2,81/7,62/8,94	2,78/11,137/12,3	2,78/11,137/12,66	4,1-16,12-17,29	
Absorbed power in cooling mode (min/rated/max)		kW	0,72/1,633/2,088	0,78/1,876/2,748	0,9/2,989/4,2	0,89/3,044/4,15	0,8-4,65-5,9	
Absorbed power in heating mode (min/rated/max)		kW	0,7/1,38/1,93	0,61/1,9/2,7	0,8/3/3,95	0,78/3/4	0,9-4,58-5,5	
Current consumption in cooling mode (min/rated/max)		A	3,2/7,2/9,2	4,2/10,2/12	4,2/17,5/18,5	1,4/6,5/6,5	1,8-8,1-10,2	
Current consumption in heating mode (min/rated/max)		A	3,1/6,8/8,5	3,6/8,5/12,1	3,5/13,5/17,5	1,3/5/6,4	1,9-8-9,5	
EER			3,23	3,28	3,33	3,29	3,03	
COP			3,75	4,01	3,71	3,71	3,52	
Maximum power consumption in cooling mode		kW	2,95	3,7	5	5	6,9	
Maximum power consumption in heating mode		kW	2,95	3,7	5	5	6,9	
Energy efficiency class in cooling			A++	A++	A++	A++	A++	
Energy efficiency class in heating mode - Average season			A+	A+	A+	A+	A+	
Energy efficiency class in heating mode - Warmer season			A++	A+++	A+++	A+++	A+++	
Energy efficiency class in heating mode - Cold season			/	/	/	/	/	
Energy consumption in cooling mode	kWh/year	kWh/year	294	395	549	589	810	
Annual energy consumption in heating mode - Average season	kWh/year	kWh/year	1470	2100	2975	2870	3860	
Annual energy consumption in heating mode - Warmer season	kWh/year	kWh/year	1575	1729	2773	2773	3360	
Annual energy consumption in heating mode - Cold season	kWh/year	kWh/year	/	/	/	/	/	
Dehumidification capacity		l/h	2,29	2,37	3,35	3,66	5,32	
DESIGN LOAD (EN 14825)	Cooling	Pdesignc	kW	5,3	7	10,5	10,5	14
	Heating / Average	Pdesignh	kW	4,2	6	8,5	8,2	11
	Heating / Warmer	Pdesignh	kW	5,4	6,3	10,1	10,1	12
	Heating / Colder	Pdesignh	kW	/	/	/	/	/
SEASONAL EFFICIENCY (EN14825)	Cooling	SEER		6,3	6,2	6,7	6,4	6,1
	Heating / Average	SCOP (A)		4	4	4	4	4
	Heating / Warmer	SCOP (W)		4,8	5,1	5,1	5,1	5
	Heating / Colder	SCOP (C)		/	/	/	/	/
INDOOR UNIT	Sound power (EN 12102)	LWA	dB(A)	57	57	63	63	65
	Sound pressure (max/med/min/silence)		dB(A)	43/39/35/-	45/42/39/-	50/47/44/-	50/47/44/-	51/48/46/-
	Air flow rate in cooling mode (max/med/min)		m³/h	720-620-500	1300-1140-1000	1700-1550-1380	1800-1600-1400	1970-1780-1580
	Air flow rate in heating mode (max/med/min)		m³/h	720-620-500	1300-1140-1000	1700-1550-1380	1800-1600-1400	1970-1780-1580
	Degree of protection			/	/	/	/	/
	Dimensions (WxHxD) (without packaging)		mm	570x260x570	830x205x830	830x245x830	830x245x830	830x287x830
	Weight (without packaging)		kg	16	21,6	27,2	27,2	29,3
	Dimensions (WxHxD) (with packaging)		mm	662x317x662	910x250x910	910x290x910	910x290x910	910x330x910
	Weight (with packaging)		kg	20,6	25,4	31,2	31,2	33,5
	OUTDOOR UNIT	Sound power (EN 12102)	LWA	dB(A)	63	67	70	70
Sound pressure			dB(A)	59	60	63	63	64
Air flow rate (max)			m³/h	2100	3500	4000	4000	7500
Degree of protection				/	/	/	/	/
Dimensions (WxHxD) (without packaging)			mm	805x554x330	890x673x342	946x810x410	946x810x410	952x1333x415
Weight (without packaging)			kg	32,5	43,9	66,9	80,5	103,7
Dimensions (WxHxD) (with packaging)			mm	915x615x370	995x740x398	1090x885x500	1090x885x500	1095x1480x495
Weight (with packaging)			kg	35,2	46,9	71,5	85	118,3
DECORATIVE PANEL	Dimensions (WxHxD) (without packaging)		mm	647x50x647	950x55x950	950x55x950	950x55x950	950x55x950
	Weight (without packaging)		kg	2,5	6,0	6,0	6,0	6,0
	Dimensions (WxHxD) (with packaging)		mm	715x123x715	1035x90x1035	1035x90x1035	1035x90x1035	1035x90x1035
	Weight (with packaging)		kg	4,5	9,0	9,0	9,0	9,0
COOLING CIRCUIT	Connecting liquid pipeline diameter	inch - mm	1/4" - 6,35	3/8" - 9,52	3/8" - 9,52	3/8" - 9,52	3/8" - 9,52	3/8" - 9,52
	Connecting gas pipeline diameter	inch - mm	1/2" - 12,7	5/8" - 15,9	5/8" - 15,9	5/8" - 15,9	5/8" - 15,9	
	Maximum piping length	m	30	50	75	75	75	
	Maximum height difference	m	20	25	30	30	30	
	Covered piping length from pre-load	m	5	5	5	5	5	
	Piping recommended minimum length	m	3	3	3	3	3	
	Refrigerant increase (over 5 m of pipes)	g/m	12	24	24	24	24	
	Maximum operating pressure	MPa	4,3-1,7	4,3-1,7	4,3-1,7	4,3-1,7	4,3-1,7	
	Refrigerant gas*	Type	Type	R32	R32	R32	R32	R32
	Global warming potential	GWP		675	675	675	675	675
Refrigerant gas charge	kg		1,15	1,5	2,4	2,4	2,9	
ELECTRICAL CONNECTIONS	Supply voltage indoor unit	V/F/Hz		One Phase 220-240 / 1 / 50				
	Supply voltage outdoor unit	V/F/Hz		One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	Three-phase 380-415/3/50	Three-phase 380-415/3/50
	Outdoor unit power supply connection	Pipes		3 x 2,5 mm2				
	Indoor - Outdoor unit connection	Pipes		4 x 1,5 mm2				
	Max Current	A		13,5	19	22,5	10	13
LIMITS OF OPERATING CONDITIONS								
Indoor ambient temperature	Maximum temperature in cooling					DB 32°C		
	Minimum temperature in cooling					DB 17°C		
	Maximum temperature in heating					DB 30°C		
Outdoor ambient temperature	Minimum temperature in heating					DB 0°C		
	Maximum temperature in cooling					DB 50°C		
	Minimum temperature in cooling					-		
	Maximum temperature in heating					DB 24°C		
	Minimum temperature in heating					DB -15°C		

The declared data relate to the conditions provided for in EN 14511, EN 14825 and EU Delegated Regulation 626/2011. The actual power consumption of the product, in conditions of real use, may differ from what is indicated. The data are subject to change and modification without prior notice. Dehumidification values refer to DB 27°C WB 19°C conditions.

The sound pressure values are at the following conditions: in semi-anechoic chamber, unit positioned in a free space, measuring device positioned 1,4 metres below the internal unit.

The sound pressure values of the outdoor units are at the following conditions: in a semi-anechoic chamber, unit positioned in free space, measuring device positioned at a distance of 1 metre (outdoor unit).

*Non-hermetically sealed equipment containing fluorinated gases with GWP equivalent of 675.

NEXYA COMMERCIAL CEILING

Energy efficient inverter air conditioners.



HIGH EFFICIENCY

High-performance R32 refrigerant gas with maximum technological efficiency, to reach the energy class A++.



FEATURES

Energy-efficient inverter technology with low-GWP R32 refrigerant gas.

Remote ON-OFF

All units in the commercial line are fitted with terminals to control the remote switching on and off of the unit via an external device.

Alarm contact

The units in the commercial line have a contact that allows the alarm status of the product to be synchronised with an external device.

Hydrophilic Aluminium coating

Suitable for installation in coastal or particularly humid areas, thanks to its excellent anti-corrosion properties. With equivalent environmental conditions, the new coating of the condensers guarantees them a longevity exceeding 7 times that of the traditional models.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Auto, Co, Sleep, Silent and Turbo functions**
- **24h timer:** for scheduling switch on and off.
- **Swing function:** automatically regulates the air flow (horizontal and vertical)
- **Follow Me function:** precise temperature detection at the remote control location.
- **Gear function:** 3 power options (50-75-100%) to optimise energy consumption.
- **Short cut function:** to automatically return to the previous settings.
- **Anti dust filter:** to capture dust and pollen.
- **Self-Clean function:** automatically cleans and dries the evaporator eliminating dust, mould and grease to ensure clean air in the room.

		Nexya S5 E Ceiling 18	Nexya S5 E Ceiling 24	Nexya S5 E Ceiling 36	Nexya S5 E Ceiling 36T	Nexya S5 E Ceiling 48T	
INDOOR UNIT CODE		OS-SANFH18E1	OS-SANFH24E1	OS-SANFH36E1	OS-SANFH36E1	OS-SANFH48E1	
INDOOR UNIT EAN CODE		8021183119190	8021183119206	8021183119213	8021183119213	8021183119220	
OUTDOOR UNIT CODE		OS-CANCH18E1	OS-CANCH24E1	OS-CANCH36E1	OS-CANCH36E1	OS-CANCH48E1	
OUTDOOR UNIT EAN CODE		8021183119053	8021183119060	8021183119077	8021183119084	8021183119091	
Output power in cooling mode (min/rated/max)		kW 2,71/5,275/5,86	3,22/6,804/7,77	2,73/10,109/11,43	2,73/10,092/11,78	3,52/14,07/15,24	
Output power in heating mode (min/rated/max)		kW 2,42/5,569/6,30	2,72/7,62/8,29	2,78/11,723/12,78	2,81/11,714/12,78	4,1/16,12/17	
Absorbed power in cooling mode (min/rated/max)		kW 0,67/1,45/2,03	0,747/2,062/2,93	0,9/3,058/4,25	0,89/3,103/4,3	0,9/5/5,95	
Absorbed power in heating mode (min/rated/max)		kW 0,54/1,5/1,64	0,65/2,05/2,85	0,8/3,16/3,95	0,78/3,085/3,95	1/5,1/6,05	
Current consumption in cooling mode (min/rated/max)		A 3,2/6/9	3,9/10,54/13,1	4,2/17/19	1,4/6,3/6,8	1,9/8,8/10,3	
Current consumption in heating mode (min/rated/max)		A 2,7/6,6/7,3	3,5/9,5/12,7	3,5/15/17,5	1,3/5,4/6,2	2,1/8,9/10,5	
EER		3,64	3,3	3,31	3,25	2,81	
COP		3,71	3,72	3,71	3,8	3,16	
Maximum power consumption in cooling mode		kW 2,95	3,7	5	5	6,9	
Maximum power consumption in heating mode		kW 2,95	3,7	5	5	6,9	
Energy efficiency class in cooling		A++	A++	A++	A++	A++	
Energy efficiency class in heating mode - Average season		A+	A+	A+	A+	A+	
Energy efficiency class in heating mode - Warmer season		A+++	A+++	A+++	A+++	A+++	
Energy efficiency class in heating mode - Cold season		/	/	/	/	/	
Energy consumption in cooling mode	kWh/year	kWh/year 305	413	574	592	809	
Annual energy consumption in heating mode - Average season	kWh/year	kWh/year 1400	1925	2937	3010	4079	
Annual energy consumption in heating mode - Warmer season	kWh/year	kWh/year 1400	1592	2800	2745	3211	
Annual energy consumption in heating mode - Cold season	kWh/year	/	/	/	/	/	
Dehumidification capacity	l/h	1,78	2,72	3,28	4,19	5,45	
DESIGN LOAD (EN 14825)	Cooling	Pdesignc kW	5,4	7,2	10,5	14	
	Heating / Average	Pdesignh kW	4	5,5	8,6	11,2	
	Heating / Warmer	Pdesignh kW	5,1	5,8	10,2	11,7	
	Heating / Colder	Pdesignh kW	/	/	/	/	
SEASONAL EFFICIENCY (EN14825)	Cooling	SEER	6,2	6,1	6,2	6,1	
	Heating / Average	SCOP (A)	4	4	4	4	
	Heating / Warmer	SCOP (W)	5,1	5,1	5,1	5,1	
	Heating / Colder	SCOP (C)	/	/	/	/	
INDOOR UNIT	Sound power (EN 12102)	LWA dB(A)	57	55	64	64	67
	Sound pressure (max/med/min/silence)	dB(A)	43/41/36/-	49/46/43/-	50/48/44/-	50/47/44/-	53/50/45/-
	Air flow rate in cooling mode (max/med/min)	m³/h	958-839-723	1192-1023-853	1955-1728-1504	1955-1728-1504	2100-1850-1600
	Air flow rate in heating mode (max/med/min)	m³/h	958-839-723	1192-1023-853	1955-1728-1504	1955-1728-1504	2100-1850-1600
	Degree of protection		/	/	/	/	/
	Dimensions (WxHxD) (without packaging)	mm	1068x235x675	1068x235x675	1650x235x675	1650x235x675	1650x235x675
Weight (without packaging)	kg	28,0	28,0	41,5	41,5	41,7	
Dimensions (WxHxD) (with packaging)	mm	1145x318x755	1145x318x755	1725x318x755	1725x318x755	1725x318x755	
Weight (with packaging)	kg	33,3	33,1	48	48,0	48,5	
OUTDOOR UNIT	Sound power (EN 12102)	LWA dB(A)	65	66	68	70	73
	Sound pressure	dB(A)	59	60	63	63	64
	Air flow rate (max)	m³/h	2100	3500	4000	4000	7500
	Degree of protection		/	/	/	/	/
	Dimensions (WxHxD) (without packaging)	mm	805x554x330	890x673x342	946x810x410	946x810x410	952x1333x415
	Weight (without packaging)	kg	32,5	43,9	66,9	80,5	103,7
Dimensions (WxHxD) (with packaging)	mm	915x615x370	995x740x398	1090x885x500	1090x885x500	1095x1480x495	
Weight (with packaging)	kg	35,2	46,9	71,5	85,0	118,3	
COOLING CIRCUIT	Connecting liquid pipeline diameter	inch - mm	1/4" - 6,35	3/8" - 9,52	3/8" - 9,52	3/8" - 9,52	3/8" - 9,52
	Connecting gas pipeline diameter	inch - mm	1/2" - 12,7	5/8" - 15,9	5/8" - 15,9	5/8" - 15,9	5/8" - 15,9
	Maximum piping length	m	30	50	75	75	75
	Maximum height difference	m	20	25	30	30	30
	Covered piping length from pre-load	m	5	5	5	5	5
	Piping recommended minimum length	m	3	3	3	3	3
	Refrigerant increase (over 5 m of pipes)	g/m	12	24	24	24	24
	Maximum operating pressure	MPa	4,3-1,7	4,3-1,7	4,3-1,7	4,3-1,7	4,3-1,7
	Refrigerant gas*	Type	R32	R32	R32	R32	R32
	Global warming potential	GWP	675	675	675	675	675
Refrigerant gas charge	kg	1,15	1,5	2,4	2,4	2,9	
ELECTRICAL CONNECTIONS	Supply voltage indoor unit	V/F/Hz	One Phase 220-240 / 1 / 50				
	Supply voltage outdoor unit	V/F/Hz	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	Three-phase 380-415/3/50	Three-phase 380-415/3/50
	Outdoor unit power supply connection	Pipes	3 x 2,5 mm2				
	Indoor - Outdoor unit connection	Pipes	4 x 1 mm2				
	Max Current	A	13,5	19	22,5	10	13
LIMITS OF OPERATING CONDITIONS							
Indoor ambient temperature	Maximum temperature in cooling					DB 32°C	
	Minimum temperature in cooling					DB 17°C	
	Maximum temperature in heating					DB 30°C	
	Minimum temperature in heating					DB 0°C	
Outdoor ambient temperature	Maximum temperature in cooling					DB 50°C	
	Minimum temperature in cooling					-	
	Maximum temperature in heating					DB 24°C	
	Minimum temperature in heating					DB -15°C	

The declared data relate to the conditions provided for in EN 14511, EN 14825 and EU Delegated Regulation 626/2011. The actual power consumption of the product, in conditions of real use, may differ from what is indicated. The data are subject to change and modification without prior notice. Dehumidification values refer to DB 27°C WB 19°C conditions.

The sound pressure values are measured under the following conditions: in semi-anechoic chamber, unit positioned in a free space, measuring device positioned 1 metre below the internal unit and 1 metre from the front of the internal unit.

The sound pressure values of the outdoor units are measured under the following conditions: in a semi-anechoic chamber, unit positioned in free space, measuring device positioned at a distance of 1 metre (outdoor unit).

*Non-hermetically sealed equipment containing fluorinated gases with GWP equivalent of 675.

NEXYA MULTISPLIT

Energy efficient multisplit inverter air conditioners



FEATURES

Energy-efficient inverter technology with low GWP R32 refrigerant.

Available in the two, three, four and five room versions, for air conditioning up to five rooms with the use of a single outdoor motor.

The system is modular: systems can be designed using wall-mounted, duct or cassette units and selecting the right size according to the thermal load of the system.

Check Olimpiasplendid.it for the combinations that can access the economic incentives.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation**
- **Auto function:** modulates the operating parameters in relation to the room temperature.
- **Sleep function:** gradually increases the set temperature and ensures reduced noise for better night-time well-being.

TECHNICAL DATA			ODU Nexya S5 E Dual Inverter 14	ODU Nexya S5 E Dual Inverter 18	ODU Nexya S5 E Trial Inverter 21	ODU Nexya S4 E Quadri Inverter 28	ODU Nexya S5 E Penta Inverter 42	
OUTDOOR UNIT CODE			OS-CANMH14EI	OS-CANMH18EI	OS-CANMH21EI	OS-CEMYH28EI	OS-CANMH42EI	
EAN CODE			8021183119107	8021183119114	8021183119121	8021183116052	8021183119138	
Cooling	Electrical power supply	V/F/Hz	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	
	Capacity (min / rated / max)	kW	1,76-4,1-4,92	2,12-5,3-6,41	2,44-6,10-7,32	2,79-7,98-9,65	4,18-12,30-14,00	
	Absorbed power (Nom/Min-Max)	kW	1,27(0,44-1,59)	1,64(0,54-2,05)	1,89(0,68-2,36)	2,17(0,74-2,71)	3,81(1,03-4,57)	
	Current consumption (Nom/Min-Max)	A	5,47(1,89-6,84)	7,06(2,32-8,82)	8,14(2,93-10,16)	9,34(3,19-11,66)	16,4(4,43-19,67)	
	Theoretical Load (PdesignC)	kW	4,1	5,3	6,1	8,02	12,3	
	SEER		6,1	6,1	6,1	6,8	6,1	
	Energy efficiency class		A++	A++	A++	A++	A++	
	Annual energy consumption	kWh/A	235	306	350	412	706	
	Heating	Capacity (min / rated / max)	kW	1,89-4,4-5,28	2,23-5,57-6,68	2,26-6,45-7,74	2,84-8,12-9,82	4,18-12,30-14,94
		Absorbed power (Nom/Min-Max)	kW	1,19(0,42-1,48)	1,5(0,51-1,88)	1,74(0,63-2,17)	2,01(0,68-2,52)	3,32(0,90-4,14)
Current consumption (Nom/Min-Max)		A	5,12(1,81-6,37)	6,46(2,20-8,09)	7,49(2,71-9,34)	8,65(2,93-10,85)	14,29(3,87-17,82)	
Theoretical Load (PdesignH) (average climate - warmer climate)		kW	3,9-4,1	4,3-5	5,1-5,1	6,25-7,05	9,5-10,40	
Scop (average climate - warmer climate)			3,8-5,1	4-5,1	4,0-5,1	4,0-5,06	3,5-5,1	
Energy efficiency class (average climate - warmer climate)		medium zone / hot zone	A A+++	A+ A+++	A+ A+++	A A++	A A+++	
Annual energy consumption (average climate - warmer climate)		kWh/A	1425-1125	1501-1373	1785-1400	2209-1947	3800-2855	
Energy efficiency E.E.R./C.O.P.		W/W	3,23/3,71	3,23/3,71	3,23-3,71	3,67-4,03	3,23-3,71	
Outdoor unit		Dimensions (WxHxD) (without packaging)	mm	805x554x330	805x554x330	890x673x342	946x810x410	946x810x410
		Weight (without packaging)	kg	31,6	35,0	43,3	62,1	74,1
	Dimensions (WxHxD) (with packaging)	mm	915x615x370	915x615x370	1030x750x438	1090x875x500	1090x875x500	
	Weight (with packaging)	kg	34,7	38,0	47,1	67,7	79,5	
	Air flow rate	m³/h	2100	2100	3000	3800	3850	
	Sound pressure (max)	dB(A)	56	56	58	61	64	
	Sound power level (max)	dB(A)	65	65	66	67	69	
	Compressor Type		rotary	rotary	rotary	rotary	rotary	
Dimensions and limitations of the cooling circuit	Diameter of tube in liquid connection line	mm	2x6,35	2x6,35	3x6,35	4x6,35	5x6,35	
	Diameter of tube in gas connection line	mm	2x9,52	2x9,52	3x9,52	3x9,52+1x12,7	4x9,52+1x12,7	
	Covered piping length from pre-load	m	15	15	22,5	30	37,5	
	Piping recommended minimum length	m	3	3	3	3	3	
	Piping Equivalent length (max)	m	40	40	60	80	80	
	Piping Equivalent max. length (single branch of piping)	m	25	25	30	35	35	
	Increase of Refrigerant	g/m	12	12	12	12	12	
	Difference in level (Max) (outdoor unit in higher position that indoor units)	m	15	15	15	15	15	
	Difference in level (Max) (outdoor unit in lower position that indoor units)	m	15	15	15	15	15	
	Difference in level (Max) (elevation difference between indoor units)	m	10	10	10	10	10	
Refrigerant fluid	Refrigerant gas *		R32	R32	R32	R32	R32	
	GWP		675	675	675	675	675	
	Refrigerant gas charge	kg	1,1	1,25	1,5	2,1	2,9	
	Maximum applied pressure high pressure side/low pressure side	MPa	4,3/1,7	4,3/1,7	4,3-1,7	4,3/1,7	4,3-1,7	
Electrical connections	Main power supply	V/F/Hz	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	One Phase 220-240 / 1 / 50	
	Max Power absorption	W	2750	3050	3910	4150	4700	
	Max Current	A	12	13	17	19	22	
Operational limits	Outdoor temperature in cooling (Min-Max)	°C B.S.	-/+50	-/+50	- /+50	-/+50	-/+50	
	Outdoor temperature in heating (Min-Max)	°C B.U.	-15/+24	-15/+24	-15/+24	-15/+24	-15/+24	

The declared data relate to the conditions envisaged in EN 14511, EN 14825 and EU Delegated Regulation 626/2011 for the combination capable of expressing the highest energy class. For the energy class and performance of the individual combinations, refer to the selection tables on the website www.olimpiaspplendid.it and to the energy labels of the specific combination. The actual power consumption of the product, in conditions of real use, may differ from what is indicated. The data are subject to change and modification without prior notice. The sound pressure values of the Nexya S4 range are measured under the following conditions: ambient sound pressure level equal to 0 dB (pressure equal to 20Pa), unit positioned in free space, measuring device positioned at a distance of 1.5 metres (outdoor unit).

The sound pressure values of the Nexya S5 range are measured under the following conditions: in semi-anechoic chamber, unit positioned in free space, measuring device positioned at a distance of 1 metres (outdoor unit).

* Non hermetically sealed equipment containing fluorinated GAS with GWP equivalent to 675.

Wall internal units

TECHNICAL DATA			IDU Nexya S4 E Inverter 9	IDU Nexya S4 E Inverter 12	IDU Nexya S4 E inverter 18
PRODUCT CODE			OS-SENEH09EI	OS-SENEH12EI	OS-SENEH18EI
EAN CODE			8021183114928	8021183114935	8021183114942
Electrical power supply	V/F/Hz		220-240/1/50	220-240/1/50	220-240/1/50
	Cooling	kW (Nom)	2,64	3,52	5,27
	Heating	kW (Nom)	2,93	3,81	4,97
Indoor unit	Dimensions (WxHxD) (without packaging)	mm	805x285x194	805x285x194	957x302x213
	Weight (without packaging)	kg	7,5	7,5	10,0
	Dimensions (WxHxD) (with packaging)	mm	870x360x270	870x360x270	1035x385x295
	Weight (with packaging)	kg	9,7	9,7	13,0
	Air flow rate (min/rated/max)	m³/h	340-460-520	360-500-600	340-460-520
	Sound pressure (silent/min/med/max)	dB(A)	21-26-30-40	22-26-34-40	21-26-30-40
	Sound power level Max (EN 12102)	dB(A)	54	54	55
Piping dimensions	Diameter of tube in liquid connection line	inch - mm	1/4" - 6,35	1/4" - 6,35	1/4" - 6,35
	Diameter of tube in gas connection line	inch - mm	3/8" - 9,52	3/8" - 9,52	1/2" - 12,7
Operational limits	Indoor temperature in cooling (Min-Max)	°C B.S.	+17/+32	+17/+32	+17/+32
	Indoor temperature in heating (Min-Max)	°C B.S.	0/+30	0/+30	0/+30

The declared data relate to the conditions provided for in EN 14511, EN 14825 and EU Delegated Regulation 626/2011. The actual power consumption of the product, in conditions of real use, may differ from what is indicated. The data are subject to change and modification without prior notice. The sound pressure values of the Nexya S4 range are measured under the following conditions: ambient sound pressure level equal to 0 dB (pressure equal to 20Pa), unit positioned in free space, measuring device positioned at a distance of 1 metre and 0.8 metres below the internal unit.

Duct and cassette internal units

TECHNICAL DATA			NEW			NEW		
			IDU Nexya S5 E Duct 9	IDU Nexya S5 E Duct 12	IDU Nexya S5 E Duct 18	IDU Nexya S5 E Cassette Compact 9	IDU Nexya S5 E Cassette Compact 12	IDU Nexya S5 E Cassette Compact 18
PRODUCT CODE			OS-SANDH09EI	OS-SANDH12EI	OS-SANDH18EI	OS-K/SANCH09EI	OS-K/SANCH12EI	OS-K/SANCH18EI
EAN CODE			8021183121018	8021183119145	8021183119152	8021183121070	8021183119329	8021183119336
Electrical power supply	V/F/Hz		220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50
	Cooling	kW (Nom)	2,64	3,52	5,28	2,64	3,52	5,28
	Heating	kW (Nom)	2,93	3,81	5,57	2,93	3,81	5,57
Indoor unit	Dimensions (WxHxD) (without packaging)	MM	700x200x506	700x200x506	880x210x674	570x260x570	570x260x570	570x260x570
	Weight (without packaging)	kg	17,8	17,8	24,4	14,5	16,3	16,0
	Dimensions (WxHxD) (with packaging)	mm	860x285x540	860x285x540	1070x280x725	640x295x675	655x290x655	662x317x662
	Weight (with packaging)	kg	21,5	21,5	29,6	17,3	20,4	20,6
	Air flow rate (min/rated/max)	m³/h	230-340-500	300-480-600	515-706-911	450-500-580	420-510-620	500-620-720
	Sound pressure (min/rated/max)	dB(A)	28-34-40	29-30-34	34-38-41	29-33-38	33-36-41	35-39-43
	Sound power level Max (EN 12102)	dB(A)	58	57	58	53	56	57
	Fan pressure	Pa	25	25	25	-	-	-
	Fan pressure adjustment field	Pa	0-40	0-60	0-100	-	-	-
	Decorative Panel	Dimensions (WxHxD) (without packaging)	mm	-	-	-	647x50x647	647x50x647
Weight (without packaging)		kg	-	-	-	2,5	2,5	2,5
Dimensions (WxHxD) (with packaging)		mm	-	-	-	715x123x715	715x123x715	715x123x715
Weight (with packaging)		kg	-	-	-	4,5	4,5	4,5
Piping dimensions	Diameter of tube in liquid connection line	inch - mm	1/4" - 6,35	1/4" - 6,35	1/4" - 6,35	1/4" - 6,35	1/4" - 6,35	1/4" - 6,35
	Diameter of tube in gas connection line	inch - mm	3/8" - 9,52	3/8" - 9,52	1/2" - 12,7	3/8" - 9,52	3/8" - 9,52	1/2" - 12,7
Operational limits	Indoor temperature in cooling (Min-Max)	°C B.S.	+16/+32	+16/+32	+16/+32	+16/+32	+17/+32	+17/+32
	Indoor temperature in heating (Min-Max)	°C B.S.	0/+30	0/+30	0/+30	0/+30	0/+30	0/+30

The declared data relate to the conditions provided for in EN 14511, EN 14825 and EU Delegated Regulation 626/2011. The actual power consumption of the product, in conditions of real use, may differ from what is indicated. The data are subject to change and modification without prior notice. The sound pressure values of the Duct S5 range are at the following conditions: in semi-anechoic chamber, unit positioned in a free space, measuring device positioned 1.5 meters below the internal unit to which are applied standard ducts with a length of 2 meters (delivery) and 1 meter (return).


The declared data relate to the conditions provided for in EN 14511, EN 14825 and EU Delegated Regulation 626/2011. The actual power consumption of the product, in conditions of real use, may differ from what is indicated. The data are subject to change and modification without prior notice. The sound pressure values of the Cassette S5 range are measured under the following conditions: in semi-anechoic chamber, unit positioned in free space, measuring device positioned at a distance of 1.4 metres below the internal unit.



Download the complete combinations tables

The table shows the possible general combinations of Nexya Multisplit outdoor units. Depending on the specific models of internal units (wall, duct, cassette), always check the feasible combinations, also available on-line in the download area of the website Olimpiasplesplendid.it.

Installation of the multi-split pipes

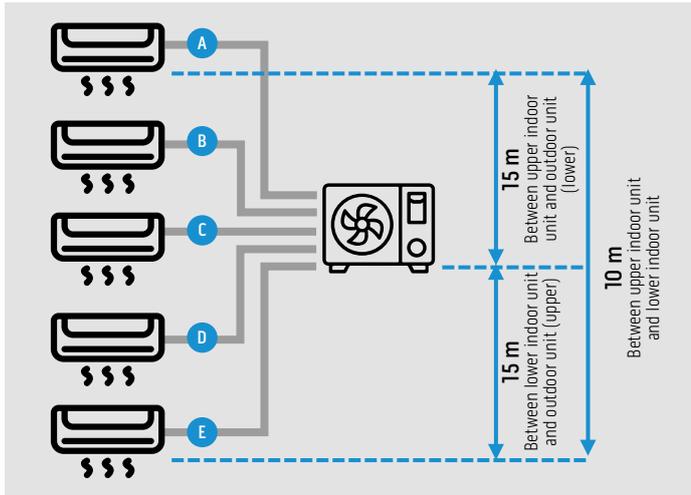

Maximum distance single pipes Indoor unit to Outdoor unit

DUAL	TRIAL	QUADRI	PENTA
25 m	30 m	35 m	35 m


Total length A+B+C+D+E

DUAL	TRIAL	QUADRI	PENTA
40 m	60 m	80 m	80 m

Twin System

The twin configuration for improved air distribution


A complete system, intended for small commercial businesses, to improve air diffusion through the connection of two internal units, of the same power, to an outdoor unit. The internal units are compatible with the Twin System and designed to be installed in one room. The control allows you to control the main unit while the secondary (slave) unit mirrors the on/off settings, set point, function mode and fan speed.

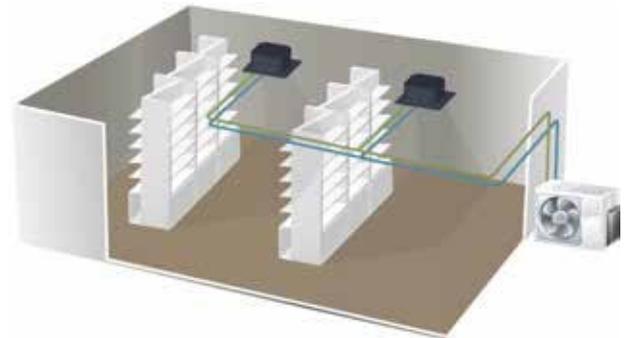

POSSIBLE COMBINATIONS

OUTDOOR UNIT	INDOOR UNIT 1	INDOOR UNIT 2
UE Nexya S5 E Commercial 24 (OS-CANCH24EI)	UI Nexya S5 E Duct 12 (OS-SANDH12EI)	UI Nexya S5 E Duct 12 (OS-SANDH12EI)
UE Nexya S5 E Commercial 36 monofase (OS-CANCH36EI)	UI Nexya S5 E Ceiling 18 (OS-SANFH18EI)	UI Nexya S5 E Ceiling 18 (OS-SANFH18EI)
UE Nexya S5 E Commercial 48 trifase (OS-CANCH48EI)	UI Nexya S5 E Cassette 24 (OS-K/SANCH24EI)	UI Nexya S5 E Cassette 24 (OS-K/SANCH24EI)

PIPE LENGTH LIMITS

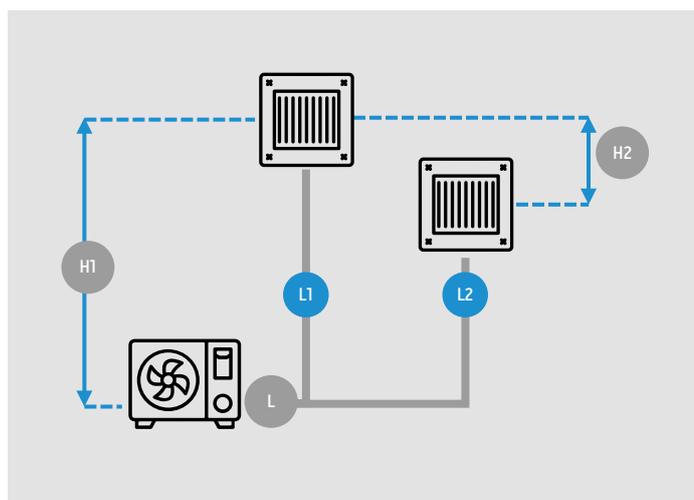

PIPE LENGTH	Pipe length (m)	12K+12K	L+Max (L1, L2)	
		18K+18K		25
		24K+24K		30
Single line maximum length (m)		50	L1, L2	
Max difference between the two lines L1-L2		15	L1-L2	
DIFFERENCE IN HEIGHT	Max difference in height between internal unit and outdoor unit	10	H1	
	Max difference in height between the two internal units	20	H2	

The Y-joints required for the Twin connection are not supplied by the manufacturer but are the responsibility of the installer. Additional installation information is available in the download area of the website Olimpiasplendid.it.

B0969 4-wire wall-mounted remote control

Compatible with:

UI NEXYA ENERGY E	—
UI NEXYA S4 E	—
UI NEXYA S5 E DUCT	○

UI NEXYA S5 E CASSETTE	○
UI NEXYA S5 E CEILING	○



B0970 Wi-Fi disc kit

Disc containing a special USB key for Wi-Fi integration. For wall/ceiling installation outside the internal unit.

Compatible with:

UI NEXYA ENERGY E	—
UI NEXYA S4 E	—
UI NEXYA S5 E DUCT	○

UI NEXYA S5 E CASSETTE	≤18
UI NEXYA S5 E CEILING	○



B1020 Wi-Fi key kit

USB key for Wi-Fi integration.

Compatible with:

UI NEXYA ENERGY E	●
UI NEXYA S4 E	●
UI NEXYA S5 E DUCT	—

UI NEXYA S5 E CASSETTE	≥24
UI NEXYA S5 E CEILING	—







DOLCECLIMA

Portable air conditioners



Technology and design for a climate that you take with you

Thanks to Olimpia Splendid's design innovation, air diffusion is optimised. And the aesthetics is diversified, to suit every interior style.



Olimpia Splendid's Blue Air Technology

To obtain the maximum comfort of use, Dolceclima portable air conditioners contain an innovative technology that generates a high and deep air jet (up to 4 meters high and 3 wide), which does not directly affect the occupants of the room, but contributes to the diffusion of a homogeneous temperature in the environment.

Behind every design, an Italian signature

Sebastiano Ercoli, Alessandro Garlandini and Alessio Abdolahian are just some of the Italian brands that have worked on the aesthetics of the Dolceclima portable air conditioners. Soft lines with a retro style are contrasted with extremely clean and rigorous shapes, to propose different designs that meet the unique styles of each home.

DOLCECLIMA ARIA 8

The super compact portable model. 2.1 kW of power



Dolceclima Aria 8 (02266)

NEW



DOLCECLIMA SILENT S1 10 P

The portable model with the best air diffusion. 2.6 kW of power



Dolceclima Silent S1 10 P (02059)

NEW



DOLCECLIMA SILENT 12 A+ WIFI

The most efficient portable model. 2.7 kW of power



Dolceclima Silent 12 A+ Wifi (02141)



DOLCECLIMA AIR PRO 14 HP WIFI

The powerful portable model in heat pump. 3.5 kW of power



Dolceclima Air Pro 14 HP Wifi (02029)



Energy efficiency classes in cooling, depending on the operating limit conditions of each model.



OS Comfort

In-depth analysis on control from smartphones and tablets

Dolceclima portable air conditioners, equipped with integrated Wi-Fi, can be controlled easily, inside and outside the home, even from smartphones and tablets. To activate them and set the main functions, simply download the compatible iOS or Android application.



The OS Comfort application allows you to manage one or more portable air conditioners installed in the home, to display the room temperature and to set the main modes (cooling, heating, dehumidification, ventilation), as well as to program the on and off timers.

NEW

DOLCECLIMA ARIA 8

8,000 BTU/h* of pressure for small places and highly practical



SPACE SAVING

The most compact portable model in the range (only 31 cm wide and 68 cm high) for summer comfort that's even easier to bring with you.



TOUCHSCREEN DISPLAY

Touch-screen control panel, with minimal aesthetic impact, for immediate control.



EXTREMELY PRACTICAL

Handles and wheels for easy movement



FEATURES

- Cooling capacity: 2.1 kW**
- Energy class: **A**
- Sound pressure: **65 dB (A)**
- Rated energy efficiency index: EER 2.6**
- Coolant gas: R290
- No tank: automatic condensation disposal
- Anti-dust filter
- LED display and multi-function remote control
- Convenient side handles and wheels
- Window and air ejection hose kit included.

FUNCTIONS

- **Cooling, dehumidification and ventilation (2 speeds)**
- **24 H timer**
- **Sleep function:** gradually increases the set temperature for greater acoustic comfort.
- **Auto-Restart function:** after a power failure, it restarts at the last function set.

* Test conditions: maximum cooling power (35°C / 80% RH).

** Test conditions: according to the EN 14511 standard.

TECHNICAL DATA			DOLCECLIMA ARIA 8
PRODUCT CODE			02266
EAN CODE			8021183022667
Nominal cooling capacity (1)	Prated	kW	2,1
Nominal heating capacity (1)	Prated	kW	-
Nominal power consumption for cooling (1)	PEER	kW	0,79
Nominal absorption for cooling (1)		A	3,5
Nominal power consumption for heating (1)	PCOP	kW	-
Nominal absorption for heating (1)		A	-
Nominal energy efficiency index (1)	EERd		2,6
Nominal efficiency coefficient (1)	COPd		-
Energy efficiency class in cooling (1)			
Energy efficiency class in heating (1)			-
Energy consumption in "thermostat off" mode	PTO	W	135
Energy consumption in "standby" mode (EN 62301)	PSB	W	<1
Hourly electricity consumption for single duct (1) cooling mode	QSD	kWh/h	0,79
Hourly electricity consumption for single duct (1) heating mode	QSD	kWh/h	-
Supply voltage		V-F-Hz	220/240-1-50
Supply voltage (min/max)		V	198 / 254
Maximum power consumption in cooling mode (1)		W	790
Maximum absorption in cooling mode (1)		A	4,5
Maximum power consumption in heating mode (4)		W	-
Maximum absorption in heating mode (4)		A	-
Dehumidification capacity (2)		l/h	0,71
Air flow rate (max/med/min)		m ³ /h	300 / 0 / -
Fan speed			2
Flexible pipe (length x diameter)		mm	1500 x 150
Maximum remote control range (distance/angle)		m / °	3 / ±30°
Dimensions (WxHxD) (without packaging)		mm	305 x 678 x 328
Dimensions (WxHxD) (with packaging)		mm	377 x 852 x 340
Weight (without packaging)		kg	19
Weight (with packaging)		kg	22
Sound pressure level (min-max) (3)		dB(A)	51 / 54
Sound power level (indoor only) (EN 12102)	LWA	dB(A)	65
Degree of protection provided by covers			IP X0
Refrigerant gas (5)		Type	R290
Global warming potential	GWP		3
Refrigerant gas charge		kg	0,14
Maximum operating pressure		MPa	3,0
Maximum operating pressure (low pressure side)		MPa	1,0
Lower flammable limit	LFL	kg/m ³	0,038
Minimum floor area for installation, use and storage		m ²	7
Power cable (N° pole x section mm ²)			3 x 0,75 mm ²
Fuse			3,15 A
Conformity mark			CE
Integrated Wi-fi			-

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 32°C - WB 24°C
	Minimum temperature in cooling	DB 16°C
	Maximum temperature in heating	-
	Minimum temperature in heating	-

(1) Test conditions: the data refer to the EN14511 standard.

(2) Test conditions in dehumidification mode: DB 30°C WB 27.1°C

(3) Declaration of test data in a semi-anechoic chamber at a distance of 2 m, minimum pressure in ventilation only

(4) High load test and maximum heating output

(5) Hermetically sealed equipment.

NEW

DOLCECLIMA SILENT S1 10

10.000 BTU/h* of power and superior comfort



BLUE AIR TECHNOLOGY

An innovative technology that generates a high and deep air jet, which does not directly affect the occupants of the room, but contributes to the diffusion of a homogeneous temperature in the environment.



TOUCHSCREEN DISPLAY

Touch-screen control panel, with minimal aesthetic impact, for immediate control.



FOLLOW ME

The remote control acts as a remote thermostat to ensure correct temperature control in the point where the occupants are present in the room.



FEATURES

- Refrigeration capacity: 2.6 kW**
- Energy rating: **A**
- Sound power: **63 dB (A)**
- Rated energy efficiency index: EER 2.8**
- Refrigerant gas: R290
- No tank: automatic condensation disposal
- Multifunction remote control and LCD display
- Practical side handles and wheels
- Air exhaust hose included.

FUNCTIONS

- **Cooling, dehumidification and ventilation (3 speeds)**
- **24 H timer**
- **Auto function:** optimises energy consumption, adjusting the cooling in relation to the room temperature.
- **Sleep and Silent function:** gradually increases the set temperature for greater acoustic comfort.
- **Turbo function:** maximum ventilation speed for super cooling.
- **Follow Me function:** precise temperature detection in the point where the remote control is located.
- **Auto-Restart function:** after a power failure, it restarts at the last function set.

* Test conditions: maximum cooling power (35°C / 80% RH).

** Test conditions: according to the EN 14511 standard.

TECHNICAL DATA

			DOLCECLIMA SILENT S1 TO P
PRODUCT CODE			02059
EAN CODE			8021183020595
Nominal cooling capacity (1)	Prated	kW	2,6
Nominal heating capacity (1)	Prated	kW	-
Nominal power consumption for cooling (1)	PEER	kW	0,93
Nominal absorption for cooling (1)		A	4,00
Nominal power consumption for heating (1)	PCOP	kW	-
Nominal absorption for heating (1)		A	-
Nominal energy efficiency index (1)	EERd		2,8
Nominal efficiency coefficient (1)	COPd		-
Energy efficiency class in cooling (1)			A
Energy efficiency class in heating (1)			-
Energy consumption in "thermostat off" mode	PTO	W	1
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,77
Hourly electricity consumption for single duct (1) cooling mode	QSD	kWh/h	0,93
Hourly electricity consumption for single duct (1) heating mode	QSD	kWh/h	-
Supply voltage		V-F-Hz	220/240-1-50
Supply voltage (min/max)		V	198 / 264
Maximum power consumption in cooling mode (1)		W	1100
Maximum absorption in cooling mode (1)		A	5,60
Maximum power consumption in heating mode (4)		W	-
Maximum absorption in heating mode (4)		A	-
Dehumidification capacity (2)		l/h	1,5
Air flow rate (max/med/min)		m ³ /h	355/-/-
Fan speed			3
Flexible pipe (length x diameter)		mm	1500 x 120
Maximum remote control range (distance/angle)		m / °	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	460 x 762 x 396
Dimensions (WxHxD) (with packaging)		mm	496 x 860 x 460
Weight (without packaging)		kg	28,0
Weight (with packaging)		kg	32,8
Sound pressure level (min-max) (3)		dB(A)	-/52
Sound power level (indoor only) (EN 12102)	LWA	dB(A)	63
Degree of protection provided by covers			IP X0
Refrigerant gas (5)		Type	R290
Global warming potential	GWP		3
Refrigerant gas charge		kg	0,23
Maximum operating pressure		MPa	2,60
Maximum operating pressure (low pressure side)		MPa	1,0
Lower flammable limit	LFL	kg/m ³	0,038
Minimum floor area for installation, use and storage		m ²	12
Power cable (N° pole x section mm ²)			3 x 1,0 / VDE
Fuse			10AT
Conformity mark			CE
Integrated Wi-fi			-

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 32°C
	Minimum temperature in cooling	DB 17°C
	Maximum temperature in heating	-
	Minimum temperature in heating	-

(1) Test conditions: the data refer to the EN14511 standard.

(2) Test conditions in dehumidification mode: DB 30°C WB 27.1°C

(3) Declaration of test data in a semi-anechoic chamber at a distance of 2 m, minimum pressure in ventilation only

(4) High load test and maximum heating output

(5) Hermetically sealed equipment.

DOLCECLIMA SILENT 12

12.000 BTU/h* of power in class A+



HIGH EFFICIENCY

Class A+ air conditioner with 11% lower energy consumption (compared to Dolceclima Silent 12 P) for more sustainable comfort



BLUE AIR TECHNOLOGY

An innovative technology that generates a high and deep air jet, which does not directly affect the occupants of the room, but contributes to the diffusion of a homogeneous temperature in the environment.



INTEGRATED WI-FI

By downloading the OS Comfort app it is possible to manage all its functions from your smartphone, even when away from home



FEATURES

- Cooling capacity: 2.7 kW**
- Energy class: **A+**
- Sound pressure: **65 dB (A)**
- Rated energy efficiency index: EER 3.1**
- Coolant gas: R290
- No tank: automatic condensation disposal
- Anti-dust filter
- Multi-function remote control and LCD display
- Convenient side handles and wheels
- Air ejection hose kit included.

FUNCTIONS

- **Cooling, dehumidification and ventilation (3 speeds)**
- **24 H timer**
- **Auto function:** optimises energy consumption, adjusting the cooling in relation to the room temperature.
- **Sleep and Silent function:** gradually increases the set temperature for greater acoustic comfort.
- **Turbo function:** maximum ventilation speed for super cooling.
- **Follow Me function:** precise temperature detection in the point where the remote control is located.
- **Auto-Restart function:** after a power failure, it restarts at the last function set.

* Test conditions: maximum cooling power (35°C / 80% RH).

** Test conditions: according to the EN 14511 standard.

TECHNICAL DATA			DOLCECLIMA SILENT T2 A+ WIFI
PRODUCT CODE			02141
EAN CODE			8021183021417
Nominal cooling capacity (1)	Prated	kW	2.7
Nominal heating capacity (1)	Prated	kW	-
Nominal power consumption for cooling (1)	PEER	kW	0,85
Nominal absorption for cooling (1)		A	3,8
Nominal power consumption for heating (1)	PCOP	kW	-
Nominal absorption for heating (1)		A	-
Nominal energy efficiency index (1)	EERd		3,1
Nominal efficiency coefficient (1)	COPd		-
Energy efficiency class in cooling (1)			
Energy efficiency class in heating (1)			-
Energy consumption in "thermostat off" mode	PTO	W	1,0
Energy consumption in "standby" mode (EN 62301)	PSB	W	1,0
Hourly electricity consumption for single duct (1) cooling mode	QSD	kWh/h	0,85
Hourly electricity consumption for single duct (1) heating mode	QSD	kWh/h	-
Supply voltage		V-F-Hz	220/240-1-50
Supply voltage (min/max)		V	198 / 264
Maximum power consumption in cooling mode (1)		W	1100
Maximum absorption in cooling mode (1)		A	6,3
Maximum power consumption in heating mode (4)		W	-
Maximum absorption in heating mode (4)		A	-
Dehumidification capacity (2)		l/h	1,5
Air flow rate (max/med/min)		m³/h	358 / 289 / 213
Fan speed			3
Flexible pipe (length x diameter)		mm	1500 x 120
Maximum remote control range (distance/angle)		m / °	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	460 x 762 x 396
Dimensions (WxHxD) (with packaging)		mm	496 x 860 x 460
Weight (without packaging)		kg	29,7
Weight (with packaging)		kg	35,1
Sound pressure level (min-max) (3)		dB(A)	48-52
Sound power level (indoor only) (EN 12102)	LWA	dB(A)	65
Degree of protection provided by covers			IPX0
Refrigerant gas (5)		Type	R290
Global warming potential	GWP		3
Refrigerant gas charge		kg	0,20
Maximum operating pressure		MPa	2,6
Maximum operating pressure (low pressure side)		MPa	1,0
Lower flammable limit	LFL	kg/m³	0,038
Minimum floor area for installation, use and storage		m²	10
Power cable (N° pole x section mm²)			3 x 1,0 / VDE
Fuse			10AT
Conformity mark			CE
Integrated Wi-fi			✓

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 32°C
	Minimum temperature in cooling	DB 17°C
	Maximum temperature in heating	-
	Minimum temperature in heating	-

(1) Test conditions: the data refer to the EN14511 standard.

(2) Test conditions in dehumidification mode: DB 30°C WB 27.1°C

(3) Declaration of test data in a semi-anechoic chamber at a distance of 2 m, minimum pressure in ventilation only

(4) High load test and maximum heating output

(5) Hermetically sealed equipment.

DOLCECLIMA AIR PRO 14 HP



14,000 BTU/h* of power. Also in heat pump



HEAT PUMP

Heat pump air conditioner. Thanks to this feature you can replace or support traditional heating in intermediate seasons.




INTEGRATED WI-FI

By downloading the OS Comfort app it is possible to manage all its functions from your smartphone, even when away from home



PURE SYSTEM

Equipped with a multi-filtering system, consisting of an electrostatic filter (with anti-dust function) and activated carbon filter (effective against unpleasant odours).



FEATURES

- Rated cooling capacity: 3.5 kW**
- Energy class: **A** / in heating **A+**
- Sound pressure: **64 dB (A)**
- Rated energy efficiency index: EER 2.6**
- Coolant gas: R290
- Anti-dust and activated carbon filter
- Multi-function remote control and LCD display
- Convenient side handles and wheels
- Window and air ejection hose kit included.

FUNCTIONS

- **Cooling, heating, dehumidification and ventilation (3 speeds)**
- **24 H timer**
- **Eco function:** adjusts the cooling in relation to the room temperature to optimise consumption.
- **Sleep and Silent functions:** for greater acoustic comfort.
- **Turbo function:** maximum ventilation speed for super cooling.
- **Blue Air/Auto function:** automatic ventilation speed for optimal air flow management.
- **Follow Me function:** precise temperature detection in the point where the remote control is located.
- **Auto-Restart function:** after a power failure, it restarts at the last function set.

* Test conditions: maximum cooling power (35°C / 80% RH).

** Test conditions: according to the EN 14511 standard.

TECHNICAL DATA			DOLCECLIMA AIR PRO 14 HP WIFI
PRODUCT CODE			02029
EAN CODE			8021183020298
Nominal cooling capacity (1)	Prated	kW	
Nominal heating capacity (1)	Prated	kW	
Nominal power consumption for cooling (1)	PEER	kW	1,35
Nominal absorption for cooling (1)		A	5,90
Nominal power consumption for heating (1)	PCOP	kW	1,05
Nominal absorption for heating (1)		A	5,00
Nominal energy efficiency index (1)	EERd		2,6
Nominal efficiency coefficient (1)	COPd		2,8
Energy efficiency class in cooling (1)			
Energy efficiency class in heating (1)			
Energy consumption in "thermostat off" mode	PTO	W	1,0
Energy consumption in "standby" mode (EN 62301)	PSB	W	0,5
Hourly electricity consumption for single duct (1) cooling mode	QSD	kWh/h	1,35
Hourly electricity consumption for single duct (1) heating mode	QSD	kWh/h	1,05
Supply voltage		V-F-Hz	220/240-1-50
Supply voltage (min/max)		V	198 / 264
Maximum power consumption in cooling mode (1)		W	1450
Maximum absorption in cooling mode (1)		A	8,0
Maximum power consumption in heating mode (4)		W	1450
Maximum absorption in heating mode (4)		A	8,0
Dehumidification capacity (2)		l/h	3,4
Air flow rate (max/med/min)		m³/h	420 / 370 / 355
Fan speed			3
Flexible pipe (length x diameter)		mm	1500 x 150
Maximum remote control range (distance/angle)		m / °	8 / ±80°
Dimensions (WxHxD) (without packaging)		mm	490 x 765 x 425
Dimensions (WxHxD) (with packaging)		mm	535 x 890 x 487
Weight (without packaging)		kg	35
Weight (with packaging)		kg	38
Sound pressure level (min-max) (3)		dB(A)	50,6 - 52
Sound power level (indoor only) (EN 12102)	LWA	dB(A)	
Degree of protection provided by covers			IPX0
Refrigerant gas (5)		Type	R290
Global warming potential	GWP		3
Refrigerant gas charge		kg	0,22
Maximum operating pressure		MPa	2,6
Maximum operating pressure (low pressure side)		MPa	1,0
Lower flammable limit	LFL	kg/m³	0,038
Minimum floor area for installation, use and storage		m²	11
Power cable (N° pole x section mm²)			3 x 1,5
Fuse			10AT
Conformity mark			CE
Integrated Wi-fi			✓

LIMITS OF OPERATING CONDITIONS

Indoor ambient temperature	Maximum temperature in cooling	DB 35°C - WB 32°C
	Minimum temperature in cooling	DB 16°C
	Maximum temperature in heating	DB 27°C - WB 21,1°C
	Minimum temperature in heating	DB 7°C - WB 3,6°C

(1) Test conditions: the data refer to the EN14511 standard.

(2) Test conditions in dehumidification mode: DB 30°C WB 27,1°C


(3) Declaration of test data in a semi-anechoic chamber at a distance of 2 m, minimum pressure in ventilation only

(4) High load test and maximum heating output

(5) Hermetically sealed equipment.

Energy Labels


AIR WATER HEAT PUMPS

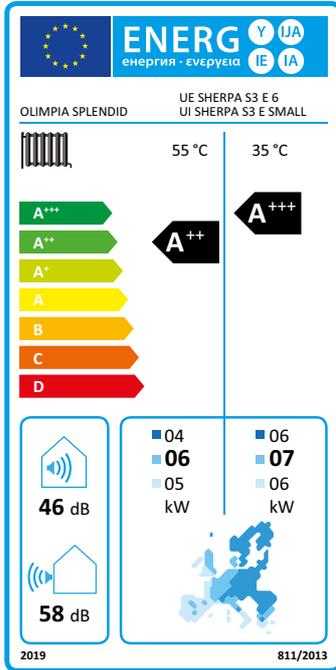

Energy efficiency class from **A+++** to **D**

Reference regulation for air water heat pump:
EUROPEAN REGULATION (EU) N. 811/2013

AIR WATER HEAT PUMPS WITH INTEGRATED STORAGE TANK

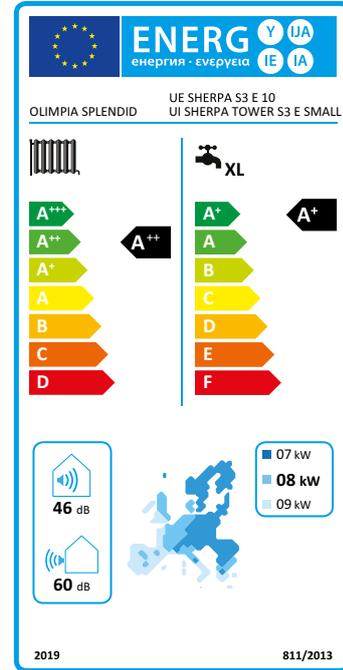


Energy efficiency class from **A+++** to **D**

Energy efficiency class storage tank from **A+** to **F**

Reference regulation for air water heat pump with
integrated storage tank:
EUROPEAN REGULATION (EU) N. 811/2013


HEAT RECOVERY VENTILATION

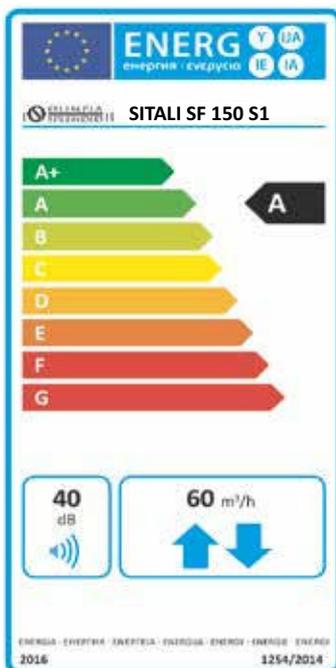

Energy efficiency class from **A+** to **G**

Reference regulation for heat recovery ventilation:
EUROPEAN REGULATION (EU) N. 1254/2014


WATER HEATER HEAT PUMP

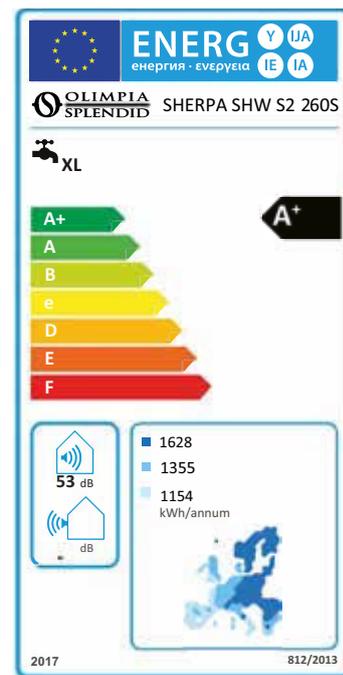

Energy efficiency class from **A+** to **F**


Reference regulation for water heater heat pump:
EUROPEAN REGULATION (EU) N. 812/2013

DOUBLE DUCT AIR CONDITIONERS (UNICO)

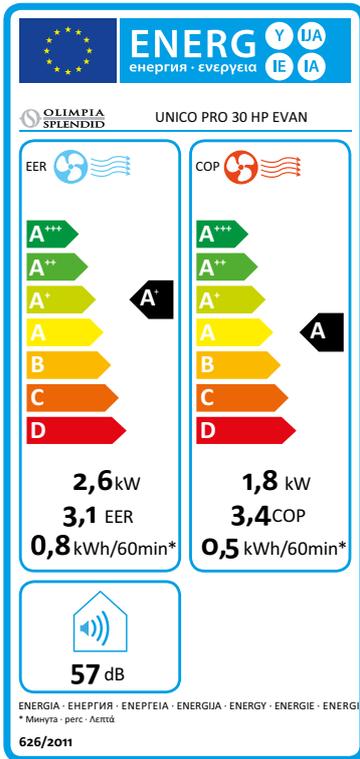

Energy efficiency class from **A+++ to D**


SINGLE DUCT AIR CONDITIONERS (PORTABLE)

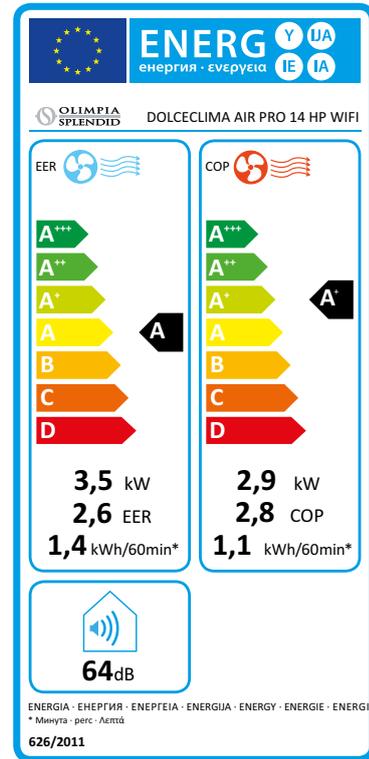

Energy efficiency class from **A+++ to D**


Double duct, single duct, fixed and wall split air conditioner Reference Regulation:
EUROPEAN REGULATION (EU) N. 626/2011

MONOSPLIT AIR CONDITIONER

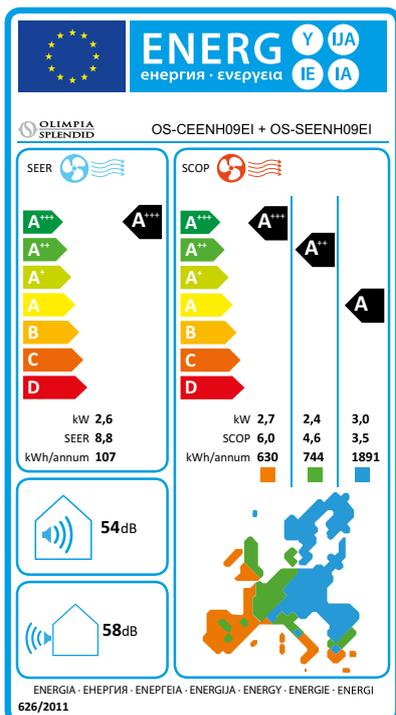

Energy efficiency class from **A+++ to D**

MULTISPLIT AIR CONDITIONER

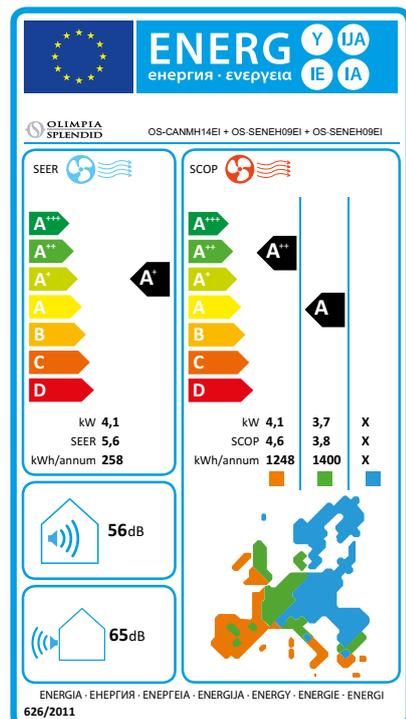

Energy efficiency class from **A+++ to D**

The technical data and aesthetic combinations of the products may change. Olimpia Splendid reserves the right to modify them at any time.





Olimpia Splendid S.p.A.

Italy, Cellatica (BS) | Headquarter

Italy, Gualtieri (RE) | Logistic Hub

France, Paris | Sales Subsidiary

Spain, Madrid | Sales Subsidiary

USA, New York | Sales Subsidiary

Australia, Melbourne | Sales Subsidiary

China, Shanghai | Trading Subsidiary



Download these product sheets, technical and installation manuals and other documents relating to catalogue references in the new download area of the **Olimpiasplesidid.com** website.



Member of:



Certified company:



**OLIMPIA
SPLendid**
HOME OF COMFORT