


Distributed by



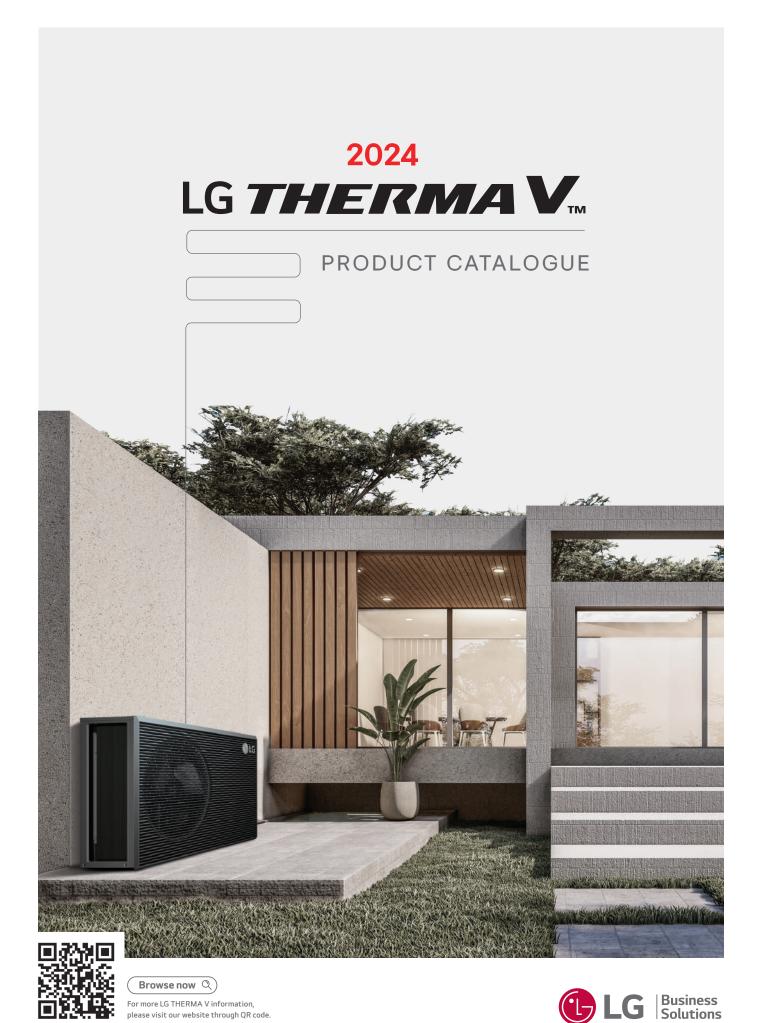

INTRODUCTION

LG BUSINESS PARTNERSHIP & INFRASTRUCTURE	006
THE EU BUILDING SECTOR	300
HEAT PUMP TECHNOLOGY	010
REGULATIONS & CERTIFICATIONS	012
THERMA V INTRODUCTION	016
WHAT IS LG THERMA V	018
LG AIR-TO-WATER HEAT PUMP SOLUTION OVERVIEW	020
THERMA V LINE-UP OVERVIEW	022
THERMA V LINE-UP INTRODUCTION	024
PRE-SALES/ENGINEERING TOOLS	030
ThinQ SEAMLESS CONNECTIVITY	032
LG BECON CLOUD SERVICE FOR THERMA V	034
LG SMART HOME ENERGY PACKAGE	038
LG ESS RESIDENTIAL LINE UP HOME SERIES	040



THERMA VIM



PRODUCTS

MONOBLOC

R290 MONOBLOC 046
R32 MONOBLOC S 058

HYDROSPLIT
R32 HYDROSPLIT HYDRO UNIT 076
R32 HYDROSPLIT COMBI UNIT 088

SPLIT
R32 SPLIT HYDRO UNIT 100
R32 SPLIT COMBI UNIT 116

138

148

HOT WATER HEAT PUMP

R410A SPLIT HYDRO UNIT

HOT WATER HEAT PUMP

ACCESSORIES

ACCESSORIES PROVIDED BY LG
LG WI-FI MODEM
DOMESTIC HOT WATER TANK
169
COMBINED TEST WITH DHW TANK
170





LG BUSINESS PARTNERSHIP & INFRASTRUCTURE

Infrastructure in Europe

LG Electronics' European Air Solution department is committed to ensuring your business success. With 16 pan-European sales offices and academies, we seek to deliver on our promise of support, efficiency and proactivity throughout each stage of our business partnership.

Our highly competitive products are delivered through our dedicated European distribution centre to ensure a steady and reliable supply of inventory.

At our European Energy Lab, LG Business Solutions is developing a heat pump technology that is optimized for the varied European climates and weather patterns along with continuous product performance verification.





LG Europe B2B Regional Head Office

LG Business Solutions Europe is based in Eschborn, Germany, with regional offices located throughout Europe. LG Europe B2B Regional Head Office is a control tower for European B2B business dealing with a wide range of products, including heat pumps and air conditioners.

LG Electronics has a strong global network.

About LG Business Solutions: http://www.lg.com/global/business/about-lg-business



LG Heat Pump and Air Conditioning Academy

LG has set up 20 official heat pump and air conditioning academies in Europe, teaching much needed skills to thousands of current industry professionals including installers, consultants, designers, sales staff and service technicians. The academy program is designed to share expertise and educate these HVAC experts by providing a cutting-edge technical experience with the newest and most advanced technologies and equipment. Moreover, as LG's entire product range is installed on site, professionals can be trained in a realistic way that offers them the chance to experience the latest products first-hand.



European Distribution Center

LG's European Distribution Center is located in Tilburg, the Netherlands. Supplying products all over Europe, this distribution hub has contributed to smooth and rapid delivery, direct shipping for smaller orders and delivery tailored to air conditioners. Inventory efficiency of the hub is secured by the LG EU's established inventory pool.

THE EU BUILDING SECTOR

Buildings account for 40% of the total carbon emissions in Europe. The building stock that dates back to the 90s is three times less energy efficient than new construction built today.



OF EU ENERGY IS USED BY BUILDING SECTOR. MAKING IT THE SINGLE LARGEST ENERGY **CONSUMER IN EUROPE**



OF GREENHOUSE GAS EMISSIONS **COME FROM BUILDINGS**

LG OUR MISSION

- ① Create low-consuming or self-consuming innovations
- 2 Build awareness and help people use energy more conservatively
- 3 Reimagine a building's usability, connectivity, convenience & health

* Source: The European Commission website. https://commission.europa.eu/news/focus-energy-efficiency-buildings-2020-02-17_en

RE-DESIGN


IMPROVE CIRCULARITY OF RAW MATERIALS

Minimize environmental impact with our eco-conscious air conditioning solutions. By reducing reliance on finite resources such as plastic, aluminum, and copper, LG's innovative approach embraces a circular economy supply chain. This not only lessens carbon emissions during pre-manufacturing but also ensures resource efficiency, particularly for energy-hungry materials. Discover the sustainability of LG air conditioners, where recycled materials play a pivotal role. We conduct thorough stability and quality tests to guarantee optimal performance, leading the way toward a more sustainable and efficient future.



RECYCLING OLD APPLIANCES

Many reusable resources are left in discarded products. Founded in 2001 through investment from LG, the Chilseo Recycling Center acts as a virtuous cycle of resources, from product design, use, and recovery, to disposal. Engineers collect old appliances from LG and other brands, then carefully take them apart. More than 40 kinds of renewable raw materials, including separated plastic, iron, and non-ferrous metals, are reborn into new LG products.



RE-PROGRAM

ACHIEVE 95% IN WASTE RECYCLING AT PRODUCTION SITES BY 2030

At LGE, we continuously invest in environmental facilities and improve our waste treatment processes with a view to being able to recycle 95% of waste generated at production sites around the world by 2030.



INNOVATE


REDUCE RELIANCE UPON HIGH GWP REFRIGERANT GASES

Refrigerant gases contribute to global warming even though their contribution is not the biggest. LG was the first manufacturer to launch an R32 monobloc air-to-water heat pump in 2018 and have also converted our full single split line up to R32 with 3 years lead time on the EU -driven planned ban in 2025. Also, LG is likely to put in place collection and recovery streams of refrigerant gases from end of life equipment at no extra cost for its customers.

CONSTANT PRODUCT EFFICIENCY IMPROVEMENTS

Electrically-driven heating and cooling equipment is LG's signature. What's more, we always aim at the highest energy ratings, generation after generation of product launching.

> Reduce carbon emissions during use of 7 major products (baseline year 2020)



FIRST HOME APPLIANCES LIGHTHOUSE FACTORY

In March 2022. Changwon LG Smart Park was named the first 'lighthouse factory' by the World Economic Forum (WEF). The WEF "Lighthouse" facilities implement Fourth Industrial Revolution technologies, such as the Internet of Things, big data, artificial intelligence and robots, into manufacturing and supply chain operations to deliver a wide range of benefits, from increased production efficiency to enhanced environmental sustainability. LG plans to apply the innovative, smart production technologies pioneered at LG Smart Park to a total of 26 LG production facilities in 13 countries, accelerating the digital transformation of its global manufacturing network by 2025.

EDUCATE

LIFE CYCLE ANALYSIS

The Air Solution Division has assessed 4 product families, as regards their total life cycle impact, according to the French PEP certification scheme: it provides product greenhouse gas emissions from production, transport, use and end of life phases, over a period of 22 years.

Efficiency comparisons between THERMA V & differing technologies

+132% improvement

Standard

gas boiler

Standard

improvement

improvement

+142%

**In Poland

CERTIFICATIONS

LG Electronics is listed in the:

- DJSI World for 9 consecutive years
- 2020 Global Sustainability Leadership top 100, announced by Privileged United Nationals Sustainability Development Goals (UNSDGs)
- 6th place in the top 100 World Sustainable Management Companies by Wall Street Journal
- ECOVADIS Platinum certified in 2021 & 2023



HEAT PUMP TECHNOLOGY


LG Electronics Leads the Way in Heat Pump Technology

As a leading HVAC supplier, LG's heating product portfolio comprises a wide range of highly energy efficient renewable energy systems, providing the right heating solution for any type of requirements and/or buildings.

What is an Air-to-Water Heat Pump System?

Modern Technology to Replace Conventional Boilers


Historically, conventional heating systems have used either oil or gas or have represented direct electric heaters. In such conventional heating systems, environmental aspects such as the pollution produced by fossil fuel use have been overlooked. Over the last years, the interest in these environmentally friendly devices has been increasing and in order to respond to the growing demand for eco-conscious devices, LG has further developed its heat pump technology to produce more efficient, environmentally friendly products.

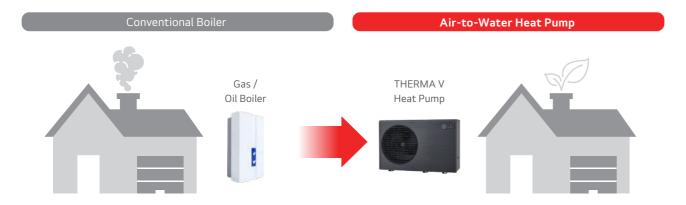

Modern Technology for Renewable Energy


010

The term "Heat Pump" refers to a technique that pumps heat from renewable energy sources, like the air, ground and water. A heat pump device transforms this energy into a usable heat source via the refrigerant cycle. With THERMA V heat pump technology about 75% of the energy needed to provide heating and hot water comes from a natural air source.¹⁾

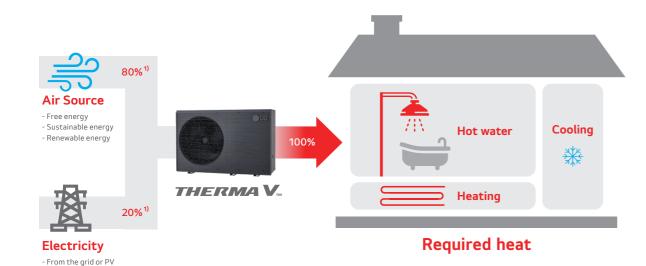

1) The efficiency ratio is to help general understanding and is based on the Seasonal Coefficient of Performance (SCOP) of THERMA V R290 Monobloc under Low Temperature & Average Climate conditions, which is higher than 5. The actual efficiency may vary with water and outside temperatures.

How do Air-to-Water Heat Pumps Work?

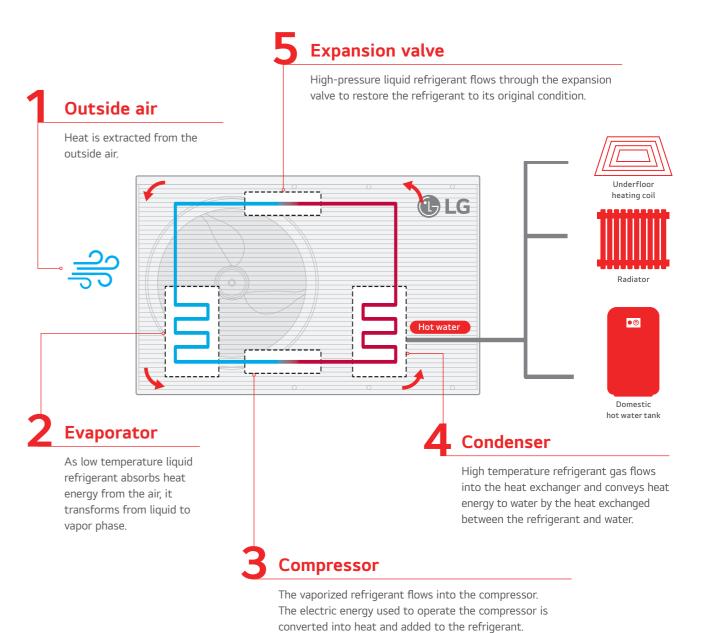

0.

REGULATIONS & CERTIFICATIONS

Energy Label

Energy labels


The EU energy label has been a key driver for helping consumers choose products which are more energy efficient. At the same time, it also encourages manufacturers to drive innovation by using more energy efficient technologies. The energy label was recognized by 93% of consumers and 79% considered it when buying energy efficient products, according to the special eurobarometer 492 carried out in the 28 EU member states during 2019.

Starting from 2013, the regulations apply to heat pumps, as well as to water heaters since 2015.

As of September 26th, 2019, the energy efficiency scale for seasonal space heating ranges from A+++ to D, with A+++ being the most efficient. The water heating energy efficiency scale for the declared load profile for combination heat pumps ranges from to A+ to F, with A+ being the most efficient.


Information on the energy label

The energy labels provide minimum necessary information such as: manufacturer's name, manufacturer's model name, seasonal space heating energy efficiency class under average climate condition from A+++ to D in medium/low temperature applications (55°C/35°C), rated heat output under average, colder and warmer climate conditions in medium/low temperature applications (55°C/35°C), European map displaying the three temperature zones, the sound power level indoors and/or outdoors. In addition, just for combination heat pumps, the energy label also includes Water heating energy efficiency class under average climate condition from A+ to F at declared load profile, while the seasonal space heating energy efficiency class and rated heat output are indicated only for the medium temperature application (55°C).



Heat pump space heaters

- 1 Manufacturer's name or trade mark Manufacturer's model name
- 3 Space heating function
- Seasonal space heating energy efficiency class under average climate condition from A+++ to D in medium/low temperature applications (55°C/35°C)
- 3 Rated heat output (kW) under average, colder and warmer climate conditions in medium/low temperature applications
- 6 Operating noise for indoor and outdoor European map displaying the three temperature zones
- * This energy label may differ depending on local regulations (for example in the UK).



Heat pump combination heaters

- 1 Manufacturer's name or trade mark
- Manufacturer's model name 3 Space heating function
- Seasonal space heating energy efficiency class under average climate conditions from A+++ to D in medium temperature applications (55°C)
- 6 Water heating energy efficiency class under average climate conditions from A+ to F
- 6 Rated heat output (kW) under average, colder and warmer climate conditions in
- medium temperature application (55°C) Operating noise for indoor and outdoor
- 1 European map displaying the three temperature zones
- * This energy label may differ depending on local regulations (for example in the UK).

Nearly Zero Energy Building (nZEB)


Nearly Zero Energy Building

Nearly Zero-Energy Building (nZEB) means a building that has a very high energy performance, while the nearly zero or very low amount of energy required should be covered to a very significant extent by energy from renewable sources, including energy from renewable sources produced on-site or nearby. The Energy Performance of Buildings Directive (EPBD) requires that EU countries ensure that all new buildings are nearly zero-energy by the end of 2020, while all new public buildings had to be nearly zero-energy after 31 December 2018.

As concrete numeric thresholds or ranges are not defined in the EPBD, each EU member state defines their Nearly Zero-Energy Buildings (nZEB) in a flexible way, taking into account their country-specific climate conditions, primary energy factors, calculation methodologies, building traditions and current ambitions.

How LG THERMA V supports to Nearly Zero Energy Buildings (nZEB)

In general, consultants use software programs to evaluate nZEB satisfaction of a new building. LG has been registering THERMA V products in their database so that our THERMA V products can be used directly in these software programs such as BENG in Netherlands, SAP in UK and RE2020 in France.

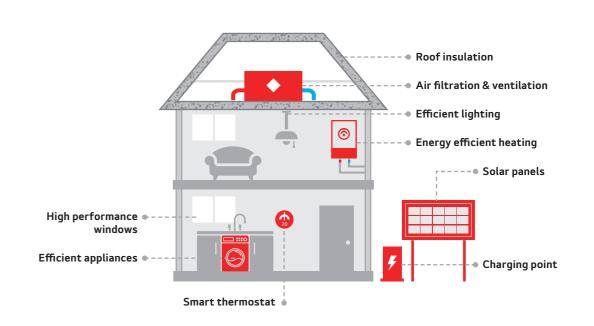

LG THERMA V energy labels | Energy labels for each LG THERMA V model can be found on the websites below.



LG.COM -Compliance Information

https://www.lg.com/global/ support/cedoc/cedoc

Browse now Q



European Product Registry for Energy Labelling

https://eprel.ec.europa.eu/screen/product/

Browse now Q



Netherland -BFNG

https://bcrg.nl/nl/ verklaringenregister/



https://www.ncm-pcdb.org.uk/sap/ pcdbsearch.jsp?type=362&pid=31



France -RF2020

https://www.edibatec.org/baseproduits/

Browse now Q)

REGULATIONS & CERTIFICATIONS

Certifications

All heat pumps and water heaters in the European market are continuously tested by various certification schemes. These are usually the basis for qualifying for subsidy programs in each country.



Keymark

https://keymark.eu/en/products/heatpumps/certified-products





The heat pump Keymark is a voluntary, independent European certification mark (ISO type 5 certification) for all heat pumps, combination heat pumps and hot water heaters (as covered by ecodesign, EU regulation 813/2013 and 814/2013). It is based on independent, third party testing and demonstrates compliance with product requirements as set in the heat pump Keymark scheme rules and with efficiency requirements as set by ecodesign lot 1 and lot 2.

The heat pump Keymark scheme is owned by the European committee for standardization (CEN).

The certificates are granted by independent certification bodies to products fulfilling all requirements of the scheme. LG THERMA V products are certified with the heat pump Keymark. Please, refer to the web page above for details.



Eurovent

https://www.eurovent-certification.com/en/





Established in 1993, Eurovent certita certification is recognized as a world leader in third-party product performance certification in the heating, ventilation, air conditioning and refrigeration fields. Its major certification brand 'Eurovent Certified Performance' has become over the years a major European certification. Today over 67% of HVAC-R products sold in Europe hold this certification. LG THERMA V products are certified with Eurovent. Please, refer to the web page above for details.

MCS

https://mcscertified.com/product-directory/





MCS certification is a mark of quality and demonstrates compliance to industry standards. It is supported by the department for business, energy & industrial strategy of the UK. In particular, MCS certification demonstrates the quality and reliability of products in the renewable technology sector and it ensures that products are compliant with the UK regulations.

LG THERMA V products are certified with MCS. Please, refer to the web page above for details.



EHPA

https://www.ehpa.org/quality/quality-label/





The EHPA quality label is a label that shows the end-consumer a quality heat pump unit or model range on the market. The heat pumps that receive the label need to undergo tests according to the international standard EN14511 and EN16147. These tests are executed by EN17025 accredited test centres.

LG THERMA V products are certified with the EHPA quality label for Austria, Germany and Switzerland. Please, refer to the web page above for details.

THERMA V. INTRODUCTION

SUSTAINABLE

CHOICE


RELIABLE

FUTURE-PROOF

ECO-RESPONSIBLE

THERMA V_{IM}

(L) LG



With refrigerant regulations changing around the world, it's time to move to a more eco-conscious solution. THERMA V R290 Monobloc uses natural R290 refrigerant which has a lower tonne of ${\rm CO_2}$ equivalent index than other gases such as R32. Possible carbon emission from refrigerants is reduced by 99.7% compared to previous R32 Monobloc. The R290 can be vented directly into the atmosphere without any impact on the climate because it's eco-conscious refrigerant with nearly zero carbon emissions.

LG Electronics' THERMA V line-up fulfills both European regulations as well as customer needs.

THERMA V... WHAT IS LG THERMA V?



LG's Advanced Heating Technology

The LG THERMA V Air-to-Water Heat Pump system boasts an advanced heating technology that can minimize energy consumption more than any other solution in the market. In addition, it has been specially designed to provide a valuable living space and domestic hot water supply to both new build and renovated homes.



THERMA V.

Space heating

The wide span THERMA V systems with high efficiency can cover heating loads of various types of houses.


Domestic hot water

As the hot water efficiency becomes more and more important, THERMA V can provide an optimized solution for this.

Space cooling

THERMA V is a single device that can also provide a cooling solution besides the heating and hot water provided by boilers.

High Efficiency and Low CO₂ Emission

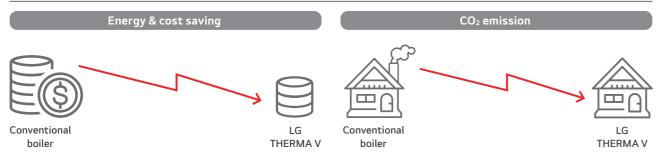

Benefits of LG THERMA V



For installers and service providers

- Time savings with features for quicker installation and commissioning
- Less manpower for handling with the compact size and light weight
- Less service visit with high reliability and durable equipment
- Intuitive controller interface for all LG products, requiring less training
- Remote control, monitoring and diagnosis to avoid unnecessary site visits
- Clip connections for quick maintenance and no need for special tools



For consultants and designers

- Variety of software to support selection and designing THERMA $\mbox{\sc V}$
- Multiple solutions with space heating, cooling and DHW supply
- Wide leaving water temperature compatible with various heat emitters
- Valuable space savings with the small footprint
- Excellent heating performance even at low ambient temperature
- Optimal system interoperability open modbus with 3rd party controller
- Adapts operation to ESS battery output, maximizing self-consumption of locally produced PV energy



For homeowners

- Energy saving by utilizing renewable energy and high efficiency equipment
- Multiple solutions with space heating, cooling and DHW supply
- Economic support through domestic renewable heat incentive programs
- Investment cost savings thanks to the compatibility with existing heating system like radiator, boiler, etc.
- Valuable space savings with the small footprint
- No disturbing caused to neighbors with low noise
- Low repair cost and high reliability with durable equipment
- Convenient control by user-friendly remote controller
- Remote connectivity for control and monitoring via LG ThinQ

021

LG AIR-TO-WATER HEAT PUMP SOLUTION OVERVIEW

			Monobloc			
			The Control of the Co			
		R290 Monobloc Control Unit	R290 Monobloc Hydro Unit	R290 Monobloc Combi Unit 1)	R32 Monobloc S	
		1 Ø: 12/14/16 kW 3 Ø: 9/12/14/16 kW	1 Ø: 12/14/16 kW 3 Ø: 9/12/14/16 kW	1 Ø: 12/14/16 kW 3 Ø: 9/12/14/16 kW	1 Ø: 5/7/9/12/14/16 kW 3 Ø: 9/12/14/16 kW	
Line-up						
Application			- \ \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\			
Energy label		Space heating (A+++) (MA+++) (MM) 55 °C	Space heating (A+++) (IIII) 55°C	Space heating A+++ Space heating A+++ M=55°C A+ C- DHW heating A+- Profile L	Space heating A+++ =35°C A++ =55°C A+ Combination with 05HW-20 (Profile L)	
Certifications		To be acquired ¹⁾	SG Rady	To be acquired ¹⁾	MOS CERTIFIED	
Operation	Outdoor air	-28 ~ 35℃	-28 ~ 35℃	-28 ~ 35℃	-25 ~ 35°C	
range (heating)	Leaving water	15~ 75℃	15~ 75℃	15~ 75℃	15 ~ 65°C	
Operation range	Outdoor air	5 ~ 48°C	5 ~ 48°C	5~ 48°C	5 ~ 48°C	
range (cooling)	Leaving water	5 ~ 27°C	5 ~ 27°C	5 ~ 27°C	5 ~ 27°C	
Operation r (hot water)		15 ~ 65°C ⁶⁾	15 ~ 65°C ⁶⁾	15 ~ 65°C ⁶⁾	15 ~ 55℃ ⁶⁾	
	ot water tank	Х	X	O (200 l)	Х	
	ter included	Х	0	0	X (accessory)	
F-gas licens	se needed	X	X	X	Х	
Wi-Fi remo	te control via	0	0	0	0	

- 1) The Combi Unit are under development, those will be launched within this year.
- 2) Wi-Fi modem (PWFMDD200) should be purchased and installed separately.
- 3) Except for 3 Ø 9 kW model (HM093MR U44)

- 4) 5, 7, 9 and 12 kW models only (HM051MR U44, HM071MR U44, HM091MR U44, HM093MR U44, HM121MR U34, HM123MR U34)
- 5) 3 Ø models only
- 6) With electric boost heater up to 80°C possible





5~48°C

5 ~ 27°C

15 ~ 55°C ⁶⁾

X

X (accessory)

Χ

0























-25 ~ 35°C

15 ~ 65°C

5 ~ 48°C

5 ~ 27°C

15 ~ 55°C ⁶⁾

O(200 l)

0

Χ

0





4/6 kW: -20 ~ 35°C 5/7/9 kW: -25 ~ 35°C

4/6 kW: 15 ~ 55°C 5/7/9 kW: 15 ~ 65°C

5 ~ 27°C

4/6 kW: 15 ~ 50°C ⁶⁾ 5/7/9 kW: 15 ~ 55°C ⁶

0

0

0



5 ~ 48°C

5 ~ 27°C

4/6 kW: 15 ~ 50°C ⁶⁾

5/7/9 kW: 15 ~ 55℃ ⁶ O (200 l)

0

0

0





suchph	CERTIFIED suchpis
4/6 kW: -20 ~ 35°C 5/7/9 kW: -25 ~ 35°C	-25 ~ 35°C
4/6 kW: 15 ~ 55°C 5/7/9 kW: 15 ~ 65°C	15 ~ 57°C



-25 ~ 35°C
15 ~ 57°C
5 ~ 48°C
5 ~ 27°C
15 ~ 50℃ ⁶⁾
X
0

0

0

THERMA V. **LINE-UP OVERVIEW**

Line-up	Unit	Туре	Power supply	Appearance	4kW	6kW	Appearance	5kW	
	Outdoor		10/ 230 V						
	Unit	-	3 Ø / 400 V						
NEW R290		Control Unit	Common				ā		
Monobloc P. 046	Indoor	Hydro	1 Ø / 230 V				+		
	Unit	Unit	3 Ø / 400 V ¹⁾				-		
		Combi	1 Ø / 230 V				7		
		Unit	3 Ø / 400 V 1)						
R32 Monobloc S	Set	_	1 Ø / 230 V				(a)	HM051MR U44	
P. 058	Jet		3 Ø / 400 V						
	Outdoor Unit	_	1 Ø / 230 V						
			3 Ø / 400 V						
R32 Hydrosplit P. 076	Indoor Unit	Hydro Unit	Common						
		Combi Unit	Common						
	Outdoor Unit	-	10/ 230 V	0 .	HU041MR U20	HU061MR U20	0	HU051MR U44	
R32 Split P. 100	Indoor Unit		Hydro Unit	1Ø/ 230 V		HN0613	3M NK5	100	HN091MR NK5
		Combi Unit	10/ 230 V		HN061	3T NK0		HN0913T NK0	
	Outdoor	_	1 Ø / 230 V						
R410A Split	Unit		3 Ø / 400 V						
P. 138	Indoor	Hydro	1 Ø / 230 V						
	Unit	Unit	3 Ø / 400 V						

	1	This is the power specifications of the backu	heater inside indoor unit	and the main nower supply	of the indoor unit is single phase (1 Ø / 230 V)
--	---	---	---------------------------	---------------------------	--------------------------------------	--------------

²⁾ The Combi Unit are under development, those will be launched within this year.3) Combinations for 1 Ø outdoor units.

⁴⁾ Combinations for 3 Ø outdoor units.


Line-up	Power supply	Appearance	200 l	270 ℓ
Hot water heat pump P. 148	1Ø/230V		WH20S	WH27S

^{*} Production of this product could be discontinued without prior notice considering manufacturer's circumstances.

7kW	9kW	Appearance	12kW	14kW	16kW		
			HM121HF UB60	HM141HF UB60	HM161HF UB60		
	HM093HFX UB60		HM123HF UB60	HM143HF UB60	HM163HF UB60		
	PHCS0	ā		PHCS0			
		+		HN1616HC NK0 ³⁾			
	HN1639HC NK0 ⁴⁾			HN1639HC NK0 ⁴⁾			
		-		HN1616HY NK0 ^{2,3)}			
	HN1636HY NK0 ^{2), 4)}			HN1636HY NK0 ^{2,4)}			
HM071MR U44	HM091MR U44	0 -	HM121MR U34	HM141MR U34	HM161MR U34		
	HM093MR U44	0	HM123MR U34	HM143MR U34	HM163MR U34		
			HU121MRB U30	HU141MRB U30	HU161MRB U30		
		0	HU123MRB U30	HU143MRB U30	HU163MRB U30		
		· .		HN1600MC NK1			
				HN1616Y NB1			
HU071MR U44	HU091MR U44						
HN09	1MR NK5						
HN09	13T NK0						
		0:	HU121MA U33	HU141MA U33	HU161MA U33		
		0	HU123MA U33	HU143MA U33	HU163MA U33		
		*		HN1616M NK5 ³⁾			
		=	HN1636M NK5 ⁴⁾				

THERMA V.


LINE-UP INTRODUCTION




R290 Monobloc

The new R290 Monobloc is a super-quiet, future-conscious heat pump that uses the R290 refrigerant which has lower GWP of only three. Refined grey design allows it to seamlessly harmonize with a diverse range of home and building exteriors and thanks to its low noise level, you don't have to worry about finding an installation location that won't disturb your neighbors. The LG THERMA V R290 Monobloc is available in three different combinations (Control Unit, Hydro Unit or Combi Unit 1) depending on the customers' needs. By adopting a high-efficiency compressor leveraging injection technology, R290 Monobloc can deliver a leaving water temperature of up to 75 degrees Celsius all year round. Thus, this unit is suitable for renovation house since such high temperature of water is compatible with previously installed radiator systems. Moreover, thanks to the LG's renowned compressor technology, the THERMA V R290 Monobloc is able to maintain a comfortably warm indoor temperature even when it's a freezing-cold negative 28 degrees Celsius outside.


Browse now Q

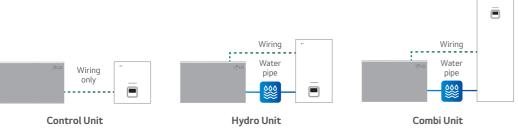




- 1) The Combi Unit are under development, those will be launched within this year.
- * The power supply is shown based on the outdoor unit.





R32 Monobloc S

The THERMA V R32 Monobloc S is the 2nd generation of LG's R32 Monobloc series. As implied by "silence" and "supreme," it boasts reduced noise level and best performance in the THERMA V Series. Combining the indoor and outdoor as one module, it's also connected by only water piping eliminating the need for refrigerant piping. Furthermore, hydronic components like the plate heat exchanger, expansion tank, water pump, flow sensor, pressure sensor, air vent valves, and safety valve are conveniently situated inside the unit. The R32 Monobloc S provides excellent heating performance, especially at low ambient temperature, while producing lower carbon emissions with R32.






Line-up	Capacity (kW)	4.0	5.5	6.0	7.0	9.0	12.0	14.0	16.0
R32	1 Ø 230 V		•		•	•	•	•	•
Monobloc S	3 Ø 400 V					•	•	•	•



R32 Hydrosplit Hydro Unit

The LG THERMA V Hydrosplit series separates the indoor unit (IDU) and outdoor unit (ODU), connecting them via water pipes. The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage. THERMA V R32 Hydrosplit Hydro Box is a solution providing space heating, cooling and DHW supply with high installation flexibility thanks to the characteristic of being a wall mounted type. Since the indoor unit is installed on the wall rather than on the floor, space is not wasted, and the light weight enables quick installation. Also, it has good maintainability because the indoor unit is located indoors, for example in a machine room.





THE STATE OF	٧
Browse now	C

Line-up	Capacity (kW)	4.0	5.5	6.0	7.0	9.0	12.0	14.0	16.0
R32 Hydrosplit	1 Ø 230 V						•	•	•
Hydro Unit	3 Ø 400 V						•	•	•

^{*} The power supply is shown based on the outdoor unit.


THERMA $V_{\scriptscriptstyle TM}$

LINE-UP INTRODUCTION



R32 Hydrosplit Combi Unit

The LG THERMA V Hydrosplit series separates the indoor unit (IDU) and outdoor unit (ODU), connecting them via water pipes. The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage. THERMA V R32 Hydrosplit Combi Unit combines an indoor unit, a water tank and complex piping into a single, space-saving solution that is able to provide space heating, cooling and DHW supply. Relatively compact and lightweight, the innovative all-in-one is easy to install and operate, and boasts the outstanding reliability and efficiency. Since there is no need to install a separate domestic hot water tank for hot water supply, space is not wasted, and the concept with all-in-one enables quick installation.






Line-up	Capacity (kW)	4.0	5.5	6.0	7.0	9.0	12.0	14.0	16.0
R32 Hydrosplit Combi Unit	1 Ø 230 V						•	•	•
	3 Ø 400 V						•	•	•

^{*} The power supply is shown based on the outdoor unit.



R32 Split Hydro Unit

The LG THERMA V R32 Split Hydro Unit is a hydro type system consisting of an indoor unit and an outdoor unit. The two units are connected by refrigerant piping only, thus hydronic components such as plate heat exchanger, expansion tank and water pump are located within the indoor unit. Due to the split nature, freezing will not compromise this unit regardless of outdoor ambient temperatures. The outdoor unit is on offer in 4/6 kW and 5/7/9 kW capacity range. R32 Split 4/6 kW model is suitable for new build houses that are well insulated and require a small heating load, while R32 Split 5/7/9 kW model is adapted for both new build and renovation projects.






Line-up	Capacity (kW)	4.0	5.5	6.0	7.0	9.0	12.0	14.0	16.0
R32 Split	1 Ø 230 V	•	•	•	•	•			
Hydro Unit	3 Ø 400 V								

^{*} The power supply is shown based on the outdoor unit.



R32 Split Combi Unit

The LG THERMA V R32 Split Combi Unit is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit. THERMA V R32 Split Combi Unit is the perfect space-saving solution for residential applications because hydronic components like the Domestic Hot Water (DHW) and buffer tanks, which are typically installed separately, are fully integrated. Also, freezing will not compromise this unit regardless of outdoor ambient temperatures due to the split nature. The outdoor unit is on offer in 4/6 kW and 5/7/9 kW capacity range. R32 Split 4/6 kW model is suitable for new build houses that are well insulated and require a small heating load, while R32 Split 5/7/9 kW model is adapted for both new build and renovation projects.





Line-up	Capacity (kW)	4.0	5.5	6.0	7.0	9.0	12.0	14.0	16.0
R32 Split	1 Ø 230 V	•	•	•	•	•			
Combi Unit	3 Ø 400 V								


^{*} The power supply is shown based on the outdoor unit.



R410A Split Hydro Unit

The LG THERMA V R410A Split Hydro Unit is a hydro type system consisting of an indoor unit and an outdoor unit. The two units are connected by refrigerant piping only, thus hydronic components such as the plate heat exchanger, expansion tank and water pump are located within the indoor unit. Due to the split nature, freezing will not compromise this unit regardless of outdoor ambient temperatures.

LG's THERMA V R410A Split Hydro Unit is designed for the benefit of users and installers who want to apply a heating solution to a large capacity building or applications subject to colder climate conditions. It has a maximized energy efficiency of A++ in the mid-temperature ranges, which results in reduced operating costs.





Line-up	Capacity (kW)	4.0	5.	5	6.0	7.0	9.0	12	2.0	14.0	16.0
R410A Split	1 Ø 230 V								•	•	•
Hydro Unit	3 Ø 400 V								•	•	•

^{*} The power supply is shown based on the outdoor unit.

THERMAV... LINE-UP INTRODUCTION





Flexible Installation Locations



Laundry room



Storage room









Bathroom Garage Garage

* Actual product appearance may differ from the above simulated scene.

PRE-SALES / ENGINEERING TOOLS

Pre-sales/Engineering Tools

LG provides a variety of software to support THERMA V for all customers including designers, installers, and end users.

1. LATS THERMA V



LATS THERMA V is a web based simulation tool that enables to choose the optimal THERMA V model from various capacity range and simulates its energy cost comparing to other heating solutions. Furthermore, customer is easily able to simulate payback compared to a conventional system such as a gas boiler, electric boiler by using LATS THERMA V.



There are 3 types project in LATS THERMA V WEB.

1. Model Selection: Select suitable model based on the design conditions you input.



2. Diagram: Generate piping / wiring diagrams in DWG format based on the design conditions and other selected applications.




3. Sound Simulation: Provide noise simulation results according to distance from house.



2. LG Energy Lab




LG Energy Lab online is a web version tool that can print energy labels. It is easy to use because it is composed of a user-friendly UI, and provides additional functions such as contact function and project management function.



3. LGMV

LGMV is a useful engineering tool that monitors THERMA V's real-time refrigerant and water cycle. It assists installers with effective and efficient start-up and commissioning after the THERMA V installation. LGMV enables service/field engineers to detect the errors and troubleshooting for fast and reliable problem solving.


 \star LGMV is available on the LG partner portal.



4. LG THERMA V Selector

The LG THERMA V Selector is a mobile application for designers, installers and end users, which provides various real-life simulations. An energy simulation can quickly indicate energy consumption and cost as well as CO_2 emission values that can be vastly reduced from conventional heating systems using minimal input values.

With both model selection and energy simulation tools, quick and accurate selection is made possible with detailed input values such as desired system configuration, required heating and Domestic Hot Water (DHW) load, which will calculate payback, result in a faster energy simulation and generate cost comparisons. Sound level can also be calculated through simulations based on the installation environment.

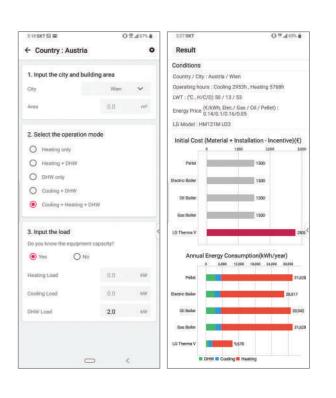

ThinQ SEAMLESS CONNECTIVITY

Smart Control, Smarter Life

LG ThinQ, a smart phone app, allows users to monitor and manage compatible LG products remotely, which means they can set the temperature and regulate the use of their THERMA V anytime and anywhere.

In most EU countries, LG ThinQ technology also works with Google Assistant, letting users control their THERMA V with voice commands.



Mandatory accessory

PWFMDD200 (LG Wi-Fi Modem) / PWYREW000 (10 m extension connect cable in between THERMA V indoor and LG Wi-Fi Modem) could be required depending on installation conditions.

- * Search "LG ThinQ" on Google market or App store, then download the app.
- * Google assistant voice control may be restricted in use and language in some countries.
- * Google and Google Home are trademarks of Google LLC.
- * Voice-enabled smart speaker device is not included.

How to install the LG ThinQ app How to connect THERMA V to the LG ThinQ app

Search and install for the LG ThinQ application from the Google
Play or Apple App Store on a smart phone.

In the video below, see how to install Wi-Fi modem and connect
THERMA V and ThinQ.

For Android users





For iOS users





Download now 🕹





Connect and control from anywhere, anytime

LG ThinQ allows end users to easily control their heating system in away they have never done before. Let them experience smart control of THERMA V with just the tap of a button. Even when outside, they can operate the THERMA V remotely.





Simple control with voice assistant

Tell THERMA V exactly what is needed.

Say, "Turn on/off the THERMA V" and the AI speaker will listen and turn on/off the THERMA V.






Efficient energy monitoring

The LG ThinQ app continuously monitors THERMA V. Whether it's everyday maintenance or something else, the app allows you to easily monitor energy usage.



ThinQ mobile app



Home screen

Space heating
/ Cooling control

Hot water control

No Disprovis Result

Display Display Figures

Useful features

Energy Usage Heat Output

Dry Work Month Year

C Fri, Jan 12, 2024

Current Power Consumption Based on 1,18, W
Daily Cumulative Usage --kWh

No history

Data is bosed on 1244. Account data may very slightly, If trait alongs is long it may not be discisized in the year.

Energy monitoring

Widget on home screen
(Android)

This image is intended to help you understand, and there may be some differences in actual use.


^{*} Control via widgets is only possible with the Android app

LG BECON CLOUD SERVICE for THERMA V...



What is LG BECON cloud Service?


LG BECON cloud service is a cloud-based service that remotely monitors a customer's heating system via PC, tablet or mobile anytime, anywhere. The operation status of the heat pump can be monitored at a glance as well as the past operation history. In the event of an issue, the cause can be identified in advance and the repair can be completed during a one-time visit. For more details and service contract, please contact your LG regional service contact.

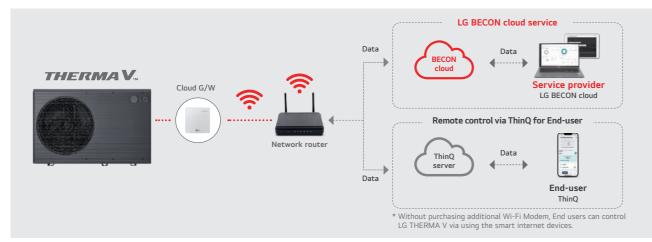

^{*} THERMA V, excluding R290 Monobloc, requires PI485 G/W installation between the Cloud G/W and the outdoor unit.

Target Customer and Benefits

Service partners / Installers



Save time and cost Save time and cost

- One time visit with right parts
- No need pre-visit for diagnosis


▼ Quality of service

- Better service to end users with accurate diagnosis and fast repair

▼ Increased business opportunity

- Combine product + service offer
- Make more installation / repairs

End-users



ऑ Enjoy peace of mind

- Be serviced at once or faster
- Be confident that immediate and quality of service will be provided in case of an error

✓ Less constraints

- No need to be at home for first diagnosis
- Monitor the operation status and control the system remotely

Key Features



Management at a glance

Monitoring status of customers
• Interactive map view or list view



Monitoring with visualized schematic

Examining the operating state of the heat pump • Schematic view or table view

- Cycle monitoring, sensor and actuator monitoring
- Current status and historical data



Remote control via cloud

Preventing unnecessary site visit caused by simple operation mistake

- Operation mode (heating / cooling / DHW), target temperature
- Emergency operation, low noise operation, quick DHW operation



Energy monitoring

Providing warning if energy usage is excessively high

• Display estimated power consumption by selfcalculation



Operation and error history

Providing operation data and error history to quickly identify the issue

• Operation history, error history, setting history, etc



Error notification by e-mail

Providing an e-mail notification automatically when


• Possible to identify immediately and take a fast action

LG BECON CLOUD SERVICE for THERMA V...

Why LG BECON cloud Service?


Quick service response time

Saving time and cost thanks to remote diagnosis of operation cycle without access to product.




Accurate diagnosis

Accurate diagnosis for cause of failure can be done by utilizing the error code and cycle data when an actual failure occurs.




Remote device control

With single account, maintenance service provider (or installer) can control their customer's sites remotely. As a result, site visit is not needed for minor issues, such as adjusting temperature or mode.




Energy monitoring

Power consumption based on self-calculation is recorded and displayed. Maintenance service provider (or installer) can provide warning if energy usage is excessively high.



Error notification by e-mail

Providing an e-mail notification automatically when an error occurs, making it possible for maintenance service provider (or installer) to immediately identify and quickly react.



ThinQ for end-users

Without purchasing additional Wi-Fi Modem, end-users can control LG THERMA V via using smart internet devices.



Requirements



Cloud gateway



PI485 gateway

Compatible THERMA V 1)	Required accessory	Network router
R290 Monobloc R32 Monobloc S R32 Split Hydro Unit R32 Split Combi Unit R32 Hydrosplit Hydro Unit	Cloud gateway (PWFMDB200) PI485 gateway (PP485A00T) ¹⁾	Wireless or wired LAN
		1
LG BECON cloud service contract	Supported device / software	Supported language 2)

- 1) In the case of R290 Monobloc, PI485 G/W is built-in, so there is no need to purchase it separately.
- 2) More languages will be supported sequentially. The schedule for service availability may vary by country.

Interface Screen

Dashboard





[Operation status]




Site

Control







[Cycle monitoring – schematic view]



[Cycle monitoring - table view]

History

in the	ter bine me	No. and	-	S will be	a bester by
100	-	-	-	And other	-
-	-	-			Special Column products with the larger than 100 to
		10,000			Special frame part of the ST or study for the state for the state of t
	******	7000			
	Alterna	-			Section 11 to the area of 12 to the 12 to the area of 12 to the ar
6.0	deserted a	-		-	Section Charles
**		70.00			Security of the second Property of the second of the secon
4.1	geomine	-			Santa Property
910					-
					beautiful from any other other bases from the sent to be

-	become.	-	To be	Secure College	=	90 · m	- tu	den
		Section .	- marian	Constitution	-	- Inner	-	
	16	10-170-000	-0.0	(r-mask		(4)		
	3000							01
and the same	Transferred		-	-				
	-							
north (Breen								

[Error history]



[Outdoor unit cycle history]

LG SMART HOME ENERGY PACKAGE




Power your home the smart way and save the energy bill

Your connected energy solution at a glance. The LG smart home energy package consists of LG's Energy Storage System (ESS) and the Air-to-Water Heat Pump (AWHP or ASHP), a system that's been expertly designed with compatibility in mind. With LG, you are able to minimize the energy cost and one step closer to the ultimate smart home.


Power your home the smart way and save on the energy bill

The connected energy solution at a glance. The LG smart home energy package consists of LG's Energy Storage System (ESS) and the Air-to-Water Heat Pump (AWHP or ASHP), a system that's been expertly designed with compatibility in mind. With LG, you are able to minimize the energy cost and one step closer to the ultimate smart home.


Conventional Products



- 1. Energy is generated from solar panels and sent to the battery.
- Once the battery is fully charged, surplus energy is automatically sold to the grid.
- 3. When hot water is needed but the battery is empty, it is no choice but to buy electricity from the grid at a higher price.




LG Energy Package




- 1. Energy is generated from solar panels and sent to your battery.
- When the battery is charged, the surplus energy from the ESS will heat the water in your water tank and also the surplus energy can be used to heating your room.
- 3. Surplus energy remaining even after utilized will be automatically converted to be sell to the grid.



Conditions for Energy Level





Energy Monitoring





Compare to

LG ESS RESIDENTIAL LINE UP HOME SERIES

- LG ESS Home 8 / 10
- D008KE1N211
- D010KE1N211
- LG HBC Battery 11H / 15H
- BUEL011HBC1
- BUEL015HBC1




• LG ESS Home 4.6

- RA460K07A00 (4.6 kW / 7.12 kWh)
- RA460K11A00 (4.6 kW / 10.68 kWh)
- LG ESS Home 6
- RA600K07A00 (6 kW / 7.12 kWh)
- RA600K11A00 (6 kW / 10.68 kWh)



Tune	Three p	hase DC	Single ph	ase DC		
Туре	Home 8	Home 10	Home 4.6	Home 6		
DC input	12 kW	13.5 kW	6.9 kW	9.0 kW		
AC Power	8 kW 10 kW		4.6 kW	6.0 kW		
Battery Usable Capacity	10.7 / 1	14.2 kWh	7.1 / 10.7 kWh			
Style	Multiple units (E	Battery separated)	Single unit (Single unit (All in one)		
Usable MPP Voltage Range	150 ~	- 800 V	150 ~ 510 V			
Number of MPPT		3	2			
Degree of Protection		IF	221			
Warranty		10)	years			
Energy Meter		ABB (B21-112-100, B21	1-212-100, B21-312-100)			

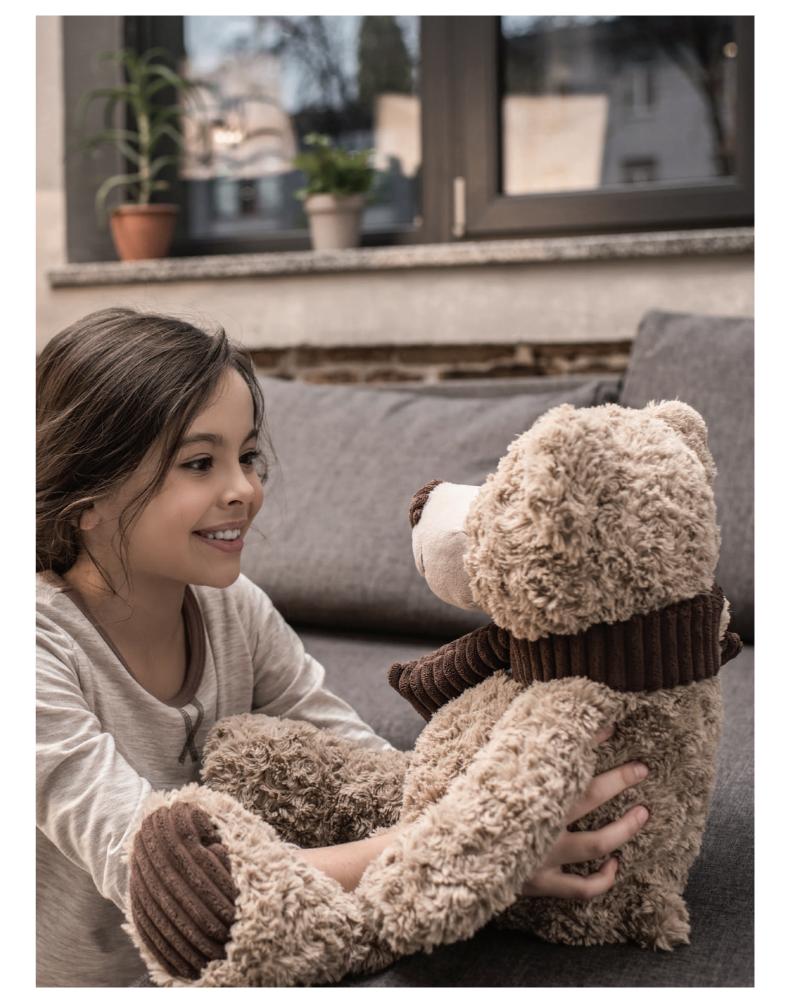



MONOBLOC

 NEW
 R290 MONOBLOC
 046

 R32 MONOBLOC S
 058

HYDROSPLIT

R32 HYDROSPLIT HYDRO UNIT 076
R32 HYDROSPLIT COMBI UNIT 088

SPLIT

R32 SPLIT HYDRO UNIT 100
R32 SPLIT COMBI UNIT 116
R410A SPLIT HYDRO UNIT 138

HOT WATER HEAT PUMP

HOT WATER HEAT PUMP 148



THERMA VI R290% Monobloc



A Heat Pump for a Sustainable Future



What is R290 Monobloc

The new R290 Monobloc is a super-quiet, future-conscious heat pump that uses the R290 refrigerant which has lower GWP of only three.

Refined grey design allows it to seamlessly harmonize with a diverse range of home and building exteriors and thanks to its low noise level, you don't have to worry about finding an installation location that won't disturb your neighbors.


The LG THERMA V R290 Monobloc is available in three different combinations (Control Unit, Hydro Unit or Combi Unit*) depending on the customers' needs.

Product Range

Phase	Capacity (kW)		Indoo	r Unit		Outdoo	r Unit
	12					HM121HF UB60	
1Ø	14	HN1616HC NKO				HM141HF UB60	
	16					HM161HF UB60	
	9		_	PHCS0	ē	HM093HFX UB60	Q [.
3 Ø	12	HN1639HC NKO				HM123HF UB60	
3 10	14	HIN 1023HC INKU				HM143HF UB60	
	16					HM163HF UB60	

Key Features

- Capacity range from 9 to 16 kW for renovation and large new builds
- Natural refrigerant R290 with low GWP (3)
- Refined gray design that adapts to various surroundings
- One of the quietest models on the market (49 dB(A) for 12 kW models)
- Maximum flow temperature up to 75℃
- Operation range down to -28℃
- Customized combinations of Control Unit, Hydro Unit, and

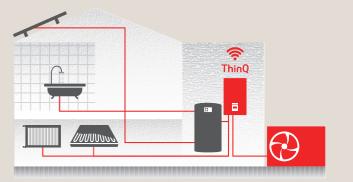

Excellent performance & efficiency















User convenience

























Easy installation & maintenance











THERMA V... R290%

HIGHLIGHT OF R290 MONOBLOC HYDRO UNIT

New Design

European design




- Refined gray design with wavy grille

High reliability








Anti-icing and Deicing technologies for R290 Monobloc


- Defrost operation by dual EEVs & Cycle
- Corrugated fin
- 3 Base pan heating (heater)
- 4 Elimination of side panel and rear grille
- Frost-free for bottom pass of heat exchanger
- 1 Increased quantity for drain holes

High Efficiency Operation

Exceptional efficiency



Annual energy cost simulation



- * This simulation result may differ from actual values due to assumptions.
- * Annual energy costs are calculated based on national gas and electricity prices as of June 2023 and may differ from the actual cost paid by customers depending on energy price changes and individual energy use patterns.

 For conventional heat pumps and gas boilers, energy consumption matches LG THERMA V R290 Monobloc 16 kW's heating demand. Specific assumptions
- 1) considered only space heating for all system (DHW operation is not considered)
- average climate, low temperature application (35°C).
 SCOP 2.7 to account for a 10-year-old heat pump's performance degradation.
- SCOP 2.7 to account for a 10-year-old heat pump's performance degradation
 90% efficiency with a condensing boiler.


Extremely Quiet Operation

Heats home in hushed tones



1) Sound power level is measured in accordance with EN 12102-1 and ISO 9614.

Ensuring regulatory compliance across all EU markets



Customers can have peace of mind with no risk of complaints and no additional costs for acoustic enclosures.

Improved Operational Stability

Freezing outside, but toasty inside

The R290 Monobloc can function in external temperatures as low as -28°C. Plus, customers can retain their existing radiators as the system can generate a water flow of up to 75°C, offering a cost-saving advantage.



Freedom of Integration

Customized combinations to meet diverse needs

Since THERMA V R290 Monobloc has hydro components integrated into the outdoor unit, it can be combined with various indoor units to implement applications tailored to customer needs.

Outdoor unit		Indoor unit type
	ē	Control Unit • Stand-alone concept • Easy integration with 3 rd party equipment
		Hydro Unit • Back-up heater & expansion tank integrated inside the Hydro Unit
	To be released	Combi Unit* • DHW tank, electric heater, expansion tank integrated inside the Combi Unit • 200 l stainless steel tank


^{*} The Combi Unit are under development, those will be launched within this year.

Convenience

Easy installation

The two-way piping connection method not only grants greater installation flexibility but also offers distinct advantages when it comes to concealing underground piping for both aesthetic and frost protection purposes.





THERMA V_m R290%

R290 MONOBLOC HYDRO UNIT

Outdoor unit

HM093HFX UB60 HM121HF UB60 / HM123HF UB60 HM141HF UB60 / HM143HF UB60 HM161HF UB60 / HM163HF UB60

Indoor unit

HN1616HC NK0 HN1639HC NK0

















Key Components

Outdoor Unit



Components

- 1 Black Fin heat exchanger (air / ref.)
- 2 New biomimetic fan
- 3 Dual sound shield
- 4 R290 scroll compressor
- 5 Hydronic components assembly
- 6 Water pump
- Deaerator
- 8 Plate heat exchanger (ref / water)
- 9 Flow sensor
- Pressure sensor

Connections

- A Leaving water pipe (male PT 1")
- B Entering water pipe (male PT 1")

Indoor Unit (Hydro Unit)



Components

- 1 Backup heater (1 Ø: 6 kW / 3 Ø: 9 kW)
- 2 Expansion tank (8 ℓ)
- 3 Air vent valve
- 4 Standard III remote controller 1)

1) Temperature control class (ERP class): V

Connections

- A Heating circuit outlet pipe (male PT 1")
- B Heating circuit inlet pipe (male PT 1")
- © Outlet pipe to outdoor unit (male PT 1")
- D Inlet pipe from outdoor unit (male PT 1")

Product Specification

Efficiency Data		Unit	9 kW (3 Ø)	12 kW (1 Ø) 12 kW (3 Ø)	14 kW (1 Ø) 14 kW (3 Ø)	16 kW (1 Ø) 16 kW (3 Ø)			
Seasonal space heating eff. class (35℃ / 55℃)		-	A+++ / A++	A+++ / A+++	A+++ / A+++	A+++ / A+++			
Seasonal space heating efficie	ency (η _s) (35℃ / 55℃)	%	206 / 147	215 / 156	212 / 155	201 / 154			
SCOP (35℃ / 55℃)		-	5.23 / 3.75	5.45 / 3.97	5.38 / 3.96	5.11 / 3.92			
Sound power level (outdoor unit)	Rated / low noise mode	dB(A)	49 / 48	49 / 48	51 / 50	52 / 51			
Sound pressure level at 5m (outdoor unit)	Rated / low noise mode	dB(A)	27 / 26	27 / 26	29 / 28	30 / 29			
Sound power level (indoor unit)	Rated	dB(A)		3	9				
Sound pressure level at 1m (indoor unit)	Rated	dB(A)		31					

Air +7°C / water +35°C	Heating capacity / COP	kW / -	9.00 / 4.90	12.00 / 4.70	14.00 / 4.50	16.00 / 4.30
Air +2℃ / water +35℃	Heating capacity / COP	kW / -	9.00 / 3.88	12.00 / 3.72	14.00 / 3.61	14.50 / 3.49
Air -7℃ / water +35℃	Heating capacity / COP	kW / -	8.90 / 3.44	11.80 / 3.27	13.00 / 3.21	13.80 / 3.17
Air +7℃ / water +55℃	Heating capacity / COP	kW / -	9.00 / 3.20	10.00 / 3.10	11.00 / 3.25	12.00 / 3.30
Air -7℃ / water +55℃	Heating capacity / COP	kW / -	7.00 / 2.43	9.30 / 2.32	10.30 / 2.28	10.90 / 2.26
Air +35℃ / water +18℃	Cooling capacity / EER	kW / -	9.00 / 3.90	11.50 / 3.78	12.00 / 3.70	12.50 / 3.70
Air +35°C / water +7°C	Cooling capacity / EER	kW / -	9.00 / 3.24	10.50 / 3.12	12.00 / 2.99	12.50 / 2.95

All +33C / Water +/C	Cooling capacity / LER	KVV / -	9.00 / 5.24	10.30 / 3.12	12.00 / 2.99	12,30 / 2,33	
Outdoor Units		Unit	HM093HFX UB60	HM121HF UB60 HM123HF UB60	HM141HF UB60 HM143HF UB60	HM161HF UB60 HM163HF UB60	
Operation range	Heating & DHW (Min. ~ Max.)	℃		-28 ~	35		
(outdoor air temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 48				
	Type - R290						
Refrigerant	GWP	-	3				
	Precharged amount		1,20	0			
Piping connections (water)	Inlet / outlet diameter	inch	Ma	le PT 1" according to ISO 7	7-1 (tapered pipe thread	ls)	
Dimension	HxWxD	mm		1,019 x 1,56	60 x 520		
Weight	Empty	kg		181.	0		
F. A. J.	Color of chassis / RAL code	-		Dawn gray /	RAL 7037		
Exterior	Color of front grille / RAL code	-		Dark dawn gray	/ RAL 7012		
	Voltage, phase, frequency	V, Ø, Hz	380 - 415, 3, 50	220 -	240, 1, 50 / 380 - 415,	3, 50	
Power supply	Standby power consumption	W		10			
	Recommended circuit breaker	Α	16		1 Ø: 25 / 3 Ø: 16		

Indoor Units		Unit	HN1616HC NKO HN1639HC NKO
a .:	Heating (Min. ~ Max.)	℃	15 ~ 75
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 27
(leaving water temperature)	DHW (Min. ~ Max.)	°C	15 ~ 80
Expansion vessel (heating circuit)	Volume	l	8
	Capacity combination	kW	3.0 + 3.0 / 3.0 + 3.0 + 3.0
Backup heater	Heating steps	Steps	2
Backup neater	Power supply	V, Ø, Hz	220 - 240, 1, 50 / 380 - 415, 3, 50
	Rated running current	Α	26 / 13
	Heating circuit outlet pipe	inch	
Di-i (t)	Heating circuit inlet pipe	inch	Mala DT 4ll according to 100 7.4 (house or district through)
Piping connections (water)	Outlet pipe to outdoor unit	inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)
	Inlet pipe from outdoor unit	inch	
Dimension	HxWxD	mm	850 x 490 x 315
Weight	Empty	kg	30.0 / 31.0
Exterior	Color / RAL code	-	Noble white / RAL 9016
Dawer avanly	Voltage, phase, frequency	V, Ø, Hz	220 - 240, 1, 50
Power supply	Recommended circuit breaker	А	10

Note

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 65 ~ 80°C Operating is available only when the booster heater is operating.

THERMA V... R290% R290 MONOBLOC HYDRO UNIT

Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HM093HFX UB60

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C	LWT 70 °C	LWT 75 °C	
Temperature	Capacity (kW)										
-25℃ DB	7.84	7.56	7.30	7.07	6.86	6.37	-	-	-	-	
-20°C DB	9.00	8.80	8.63	8.52	8.51	8.27	6.77	-	-	-	
-15℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	8.71	7.17	-	-	
-7℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	8.99	-	
-4℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	8.91	
-2℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	
2℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	8.08	6.84	6.36	
7℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	8.03	7.67	
10℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	8.95	
15℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	
18℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	
20℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	
35℃ DB	-	-	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00	

HM121HF UB60 / HM123HF UB60

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C	LWT 70 °C	LWT 75 °C		
Temperature	Capacity (kW)											
-25℃ DB	8.36	8.07	7.79	7.54	7.32	6.37	-	-	-	-		
-20℃ DB	9.60	9.39	9.20	9.09	9.08	8.27	6.77	-	-	-		
-15℃ DB	10.84	10.69	10.55	10.55	10.84	10.76	8.71	7.17	-	-		
-7℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	11.27	10.00	8.99	-		
-4℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	10.88	9.65	8.91		
-2℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	11.45	10.29	9.32		
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	8.08	6.84	6.36		
7℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	10.28	8.34	7.67		
10℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	11.20	9.90	8.95		
15℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	11.09		
18℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	11.69		
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00		
35℃ DB	-	-	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00		

HM141HF UB60 / HM143HF UB60

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C	LWT 70 °C	LWT 75 °C			
Temperature		Capacity (kW)											
-25℃ DB	8.88	8.57	8.28	8.01	7.78	6.37	-	-	-	-			
-20℃ DB	10.20	9.97	9.78	9.66	9.48	8.27	6.77	-	-	-			
-15℃ DB	12.06	11.99	11.79	11.59	11.29	10.76	8.71	7.17	-	-			
-7℃ DB	14.00	14.00	13.82	13.63	13.45	12.58	11.27	10.00	8.99	-			
-4℃ DB	14.00	14.00	13.90	13.83	13.83	13.23	12.06	10.88	9.65	8.91			
-2℃ DB	14.00	14.00	13.96	13.95	14.00	13.71	12.59	11.45	10.29	9.32			
2℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	13.16	8.08	6.84	6.36			
7℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	10.28	8.34	7.67			
10℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	11.20	9.90	8.95			
15℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	12.72	12.02	11.09			
18℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	13.82	12.89	11.69			
20℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00	13.47	12.09			
35℃ DB	-	-	14.00	14.00	14.00	14.00	14.00	14.00	14.00	12.80			

HM161HF UB60 / HM163HF UB60

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C	LWT 70 °C	LWT 75 °C		
Temperature		Capacity (kW)										
-25℃ DB	9.41	9.08	8.76	8.48	7.81	6.37	-	-	-	-		
-20°C DB	10.80	10.56	10.35	10.23	9.48	8.27	6.77	-	-	-		
-15℃ DB	13.36	13.28	12.74	12.15	11.29	10.76	8.71	7.17	-	-		
-7℃ DB	16.00	16.00	15.17	14.35	13.52	12.58	11.27	10.00	8.99	-		
-4°C DB	16.00	16.00	15.43	14.85	14.29	13.23	12.06	10.88	9.65	8.91		
-2°C DB	16.00	16.00	15.69	15.34	14.81	13.71	12.59	11.45	10.29	9.32		
2°C DB	16.00	16.00	16.00	16.00	16.00	14.84	13.16	8.08	6.84	6.36		
7℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	14.25	10.28	8.34	7.67		
10℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	14.92	11.20	9.90	8.95		
15℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	12.72	12.02	11.09		
18℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	13.82	12.89	11.69		
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	14.56	13.47	12.09		
35℃ DB	-	-	16.00	16.00	16.00	16.00	16.00	16.00	14.40	12.80		

Performance Table for Cooling Operation

Maximum cooling capacity

HM093HFX UB60

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
20℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
30℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	8.01	8.64	9.00	9.00	9.00	9.00	9.00
45°C DB	7.02	7.63	8.23	8.63	9.00	9.00	9.00

HM121HF UB60 / HM123HF UB60

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
20℃ DB	11.50	11.50	11.50	11.50	11.50	11.50	11.50
30°C DB	10.97	11.50	11.50	11.50	11.50	11.50	11.50
35℃ DB	10.50	11.28	11.50	11.50	11.50	11.50	11.50
40°C DB	9.35	10.08	10.80	11.27	11.50	11.50	11.50
45°C DB	8.19	8.90	9.61	10.07	10.77	11.23	11.50

HM141HF UB60 / HM143HF UB60

	,						
Outdoor	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C	LWT 18 °C	LWT 20 °C	LWT 22 °C
Temperature				Capacity (kW)			
20℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
30°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40℃ DB	10.68	11.52	12.00	12.00	12.00	12.00	12.00
45℃ DB	9.36	10.17	10.98	11.51	12.00	12.00	12.00

HM161HF UB60 / HM163HF UB60

	,						
Outdoor	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C	LWT 18 °C	LWT 20 °C	LWT 22 °C
Temperature				Capacity (kW)			
20℃ DB	12.50	12.50	12.50	12.50	12.50	12.50	12.50
30℃ DB	12.50	12.50	12.50	12.50	12.50	12.50	12.50
35℃ DB	12.50	12.50	12.50	12.50	12.50	12.50	12.50
40℃ DB	12.02	12.50	12.50	12.50	12.50	12.50	12.50
45℃ DB	10.03	10.78	11.54	12.05	12.50	12.50	12.50

Note

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM : Liters Per Minute (ℓ/\min), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


THERMA V... R290% R290 MONOBLOC HYDRO UNIT

Drawings


HM093HFX UB60 HM121HF UB60 / HM123HF UB60

HM141HF UB60 / HM143HF UB60

HM161HF UB60 / HM163HF UB60

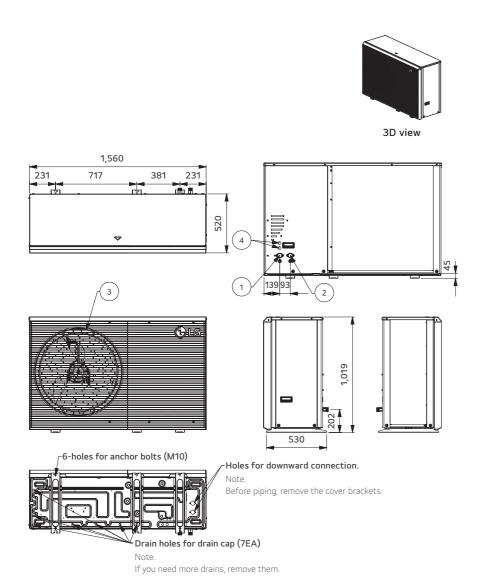

No.	Part name	Description
1	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Air discharge grille	-
4	Access to electrical terminals	Power, Communication

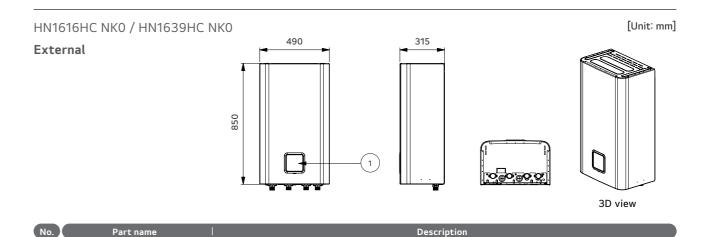


Built-in remote controller

Internal

Control panel

[Unit: mm]

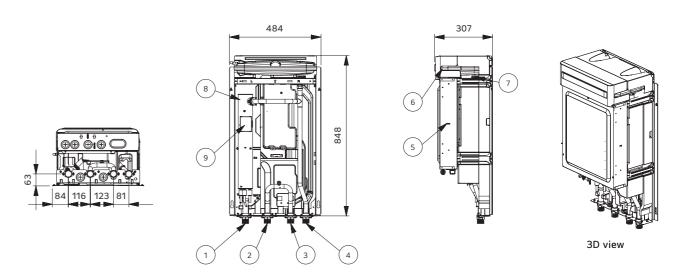

No.	Part name	Description
1	Leaving water pipe (heat load)	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Entering water pipe (heat load)	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Leaving water pipe (ODU)	Male PT 1" according to ISO 7-1 (tapered pipe threads)
4	Entering water pipe (ODU)	Male PT 1" according to ISO 7-1 (tapered pipe threads)
5	Control box	PCB and terminal blocks
6	Expansion tank	Absorbing volume change of heated water
7	Air vent	Air purging when charging water
8	Backup heater	Capacity: 1 Ø 6kW, 3 Ø 9kW
9	Terminal switch	Cut-off power input to backup heater at 90°C (manual return 55°C)

THERMA V... R290% R290 MONOBLOC CONTROL UNIT

Outdoor unit

HM093HFX UB60 HM121HF UB60 / HM123HF UB60 HM141HF UB60 / HM143HF UB60 HM161HF UB60 / HM163HF UB60

Indoor unit

PHCS0





Thing is a second of the secon

Key features

- Stand-alone concept
- Light weight and compact size fits in small spaces
- Simple installation by minimizing piping and wiring work
- Easy integration with 3rd party equipment because of less cabling

Indoor Units		Unit	PHCS0
0 11	Heating (Min. ~ Max.)	℃	15 ~ 75
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 27
(leaving water temperature)	DHW (Min. ~ Max.)	°C	15 ~ 80
Dimension	H x W × D	mm	490 x 420 x 141
Weight	Empty	kg	6.7
Exterior	Color / RAL code	-	Essence white / RAL 9003
Power supply	Voltage, phase, frequency	V, Ø, Hz	220-240, 1, 50
Power supply	Recommended circuit breaker	А	10

THERMA V... R290% R290 MONOBLOC COMBIUNIT

PRELIMINARY INTRODUCTION

Outdoor unit


HM093HFX UB60 HM121HF UB60 / HM123HF UB60 HM141HF UB60 / HM143HF UB60 HM161HF UB60 / HM163HF UB60

Indoor unit

HN1616HY NK0 HN1636HY NK0







Key features

- All-in-one Combi Unit with integrated hot water cylinder
- Saves space in the technical room with a small footprint
- Installation time reduced with pre-installed components
- Harmonized with other household appliances for a cohesive exterior

Indoor Units		Unit	HN1616HY NK0 HN1636HY NK0
0	Heating (Min. ~ Max.)	℃	15 ~ 75
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	℃	5 ~ 27
(leaving water temperature)	DHW (Min. ~ Max.)	℃	15 ~ 80
	Volume	l	200
Domestic hot water tank	Tank material	-	Duplex stainless steel
	Standby losses	W	60
Expansion vessel (heating circuit)	Volume	l	8
Flantain hantau	Capacity combination	kW	1 Ø: 3.0, 6.0 / 3 Ø: 9.0
-lectric heater	Power supply	V, Ø, Hz	220-240, 1, 50 / 380-415, 3, 50
	Inlet / outlet diameter for connection to outdoor unit	inch	
Piping connections (water)	Inlet / outlet diameter for space heating	inch	Female G1" according to ISO228-1 (parallel pipe threads)
	Inlet / outlet diameter for DHW	inch	
	Recirculation	inch	
Dimension	H × W × D	mm	1,750 x 600 × 660 (expected, subject to change in the future)
Weight	Empty	kg	113.0 (expected, subject to change in the future)
Exterior	Color / RAL code	-	White / RAL 9016

 $[\]hbox{* The Combi Unit are under development, those will be launched within this year. Therefore, this specification is preliminary and it may be changed.}$

THERMAV **R32** Monobloc S

Silence and Supreme LG

What is R32 Monobloc S


The THERMA V R32 Monobloc S is a ready-to-install, plug and play heat pump without an indoor unit. As implied by "silence" and "supreme," it boasts reduced noise level and best performance in the THERMA V R32 series. With its unique design, it requires only water piping connections, eliminating the need for additional refrigerant piping work. This not only simplifies installation but also ensures a spaceefficient solution suitable for both new builds and renovations.

Product Range

Capacity (kW)	Uı	nit	Appearance
Capacity (KWV)	10	3 Ø	Appearance
5	HM051MR U44	-	LG LG
7	HM071MR U44	-	
9	HM091MR U44	HM093MR U44	
12	HM121MR U34	HM123MR U34	8
14	HM141MR U34	HM143MR U34	
16	HM161MR U34	HM163MR U34	



- Capacity range from 5 to 16 kW for new build and renovation
- R32 refrigerant with reduced Global Warming Potential (GWP)
- No need for F-gas license and simple installation due to no refrigerant piping work
- Low noise level for high installation flexibility
- Maximum flow temperature up to 65℃
- Operation range down to -25℃
- Standalone heat pump allowing easy installation



Excellent performance & efficiency















User convenience



























Easy installation & maintenance












THERMA V_m (R32)


HIGHLIGHT OF R32 MONOBLOC S

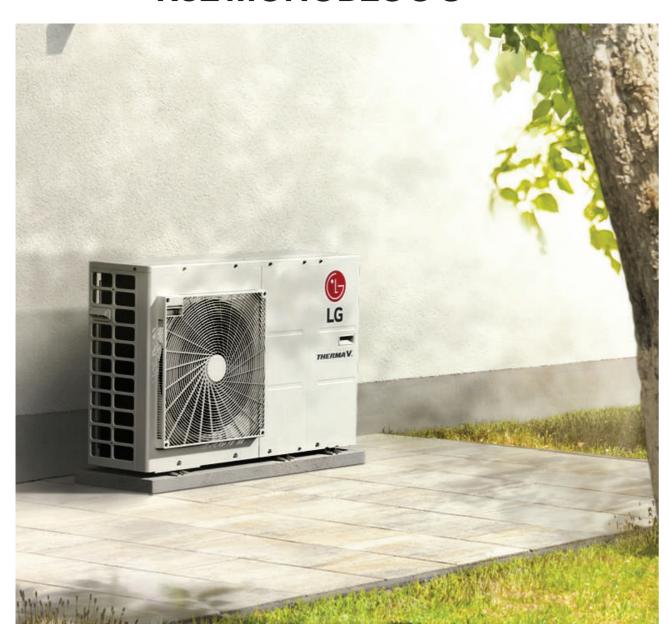

Monobloc Concept

R32 Monobloc S is an all-in one concept, with its reduced weight allowing quicker and easier installations.

- Additional hydronic components are included in the package
- Easier and quicker installation without refrigerant piping work
- The best solution when space heating only is needed

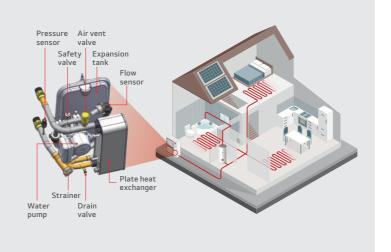

Ready-to-install and Space Saving Solution

- Integrated hydronic components in the package
- Easier and quicker installation without refrigerant piping work
- The best solution, when interior space is limited



Low Noise Level Allowing Installation Flexibility

- Designed to reach lower noise levels in order to meet homeowner expectations in urban areas
- Noise reduction technology such as encapsulated compressor and vibration-decoupling to ensure a quieter and more comfortable experience
- Quiet Mark certified*





* Certified products are HM051MR U44 / HM071MR U44 / HM091MR U44 / HM093MR U44 / HM121MR U34 / HM123MR U34 This certification is valid for UK & EU territories only.

Remarkable Heating Performance even in Cold Weather

- 100 % heating capacity at -15℃ ambient temp. (@LWT 35 ℃, except for 16 kW model)
- Longer continuous heating periods with reduced defrost operation time and extended intervals



THERMA V... (R32) R32 MONOBLOC S

Outdoor unit

HM051MR U44 HM071MR U44 HM091MR U44 HM093MR U44

























Key Components



Components

- 1 Standard III remote controller 1), 2)
- 2 R1 Compressor
- 3 Compressor noise shield
- 4 Black Fin heat exchanger (ref/air)
- 5 Plate type heat exchanger (ref/water)
- 6 Water pump
- Water flow sensor
- 8 Expansion vessel (8 l)
- 9 Water pressure sensor
- 10 Air vent valve
- Strainer

1) The remote controller is supplied with the product, but it needs to be installed separately.

2) Temperature control class (ERP class): V

Product Specification

Efficiency Data			5 kW (1 Ø)	7 kW (1 Ø)	9 kW (1 Ø) 9 kW (3 Ø)	
Seasonal space heating eff. class (35°C / 55°C)			A+++ / A++	A+++ / A++	A+++ / A++	
Seasonal space heating efficiency (η_s) (35°C / 55°C)			175 / 125	176 / 125	179 / 125	
SCOP (35°C / 55°C)		-	4.46 / 3.20	4.48 / 3.20	4.55 / 3.20	
Sound power level	Rated / low noise mode	dB(A)	57 / 54	57 / 55		
Sound pressure level at 5m	Rated / low noise mode	dB(A)	35 / 32	35 / 33		

Nominal Capacity and COP/EER					
Air +7℃ / water +35℃	Heating capacity / COP	kW / -	5.50 / 4.70	7.00 / 4.70	9.00 / 4.60
Air +2℃ / water +35℃	Heating capacity / COP	kW / -	4.40 / 3.60	5.60 / 3.55	6.80 / 3.50
Air +7℃ / water +55℃	Heating capacity / COP	kW / -	5.50 / 2.70	5.50 / 2.70	5.50 / 2.70
Air +35℃ / water +18℃	Cooling capacity / EER	kW / -	5.50 / 4.70	7.00 / 4.70	9.00 / 4.60
Air +35℃ / water +7℃	Cooling capacity / EER	kW / -	5.50 / 3.30	7.00 / 3.20	9.00 / 3.10

Outdoor Units		Unit	HM051MR U44	HM071MR U44	HM091MR U44 HM093MR U44			
Operation range	Heating & DHW (Min. ~ Max.)	℃						
(outdoor air temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 48					
	Heating (Min. ~ Max.)	°C		15 ~ 65				
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	°C		5 ~ 27				
	DHW (Min. ~ Max.)	°C	15 ~ 80					
	Туре	-		R32	332			
	GWP	-	675					
	Precharged amount	g	1,400					
Piping connections (water)	Inlet / outlet diameter	inch	Male PT 1"	according to ISO 7-1 (tapered p	ipe threads)			
Expansion vessel (heating circuit)	Volume	l		8				
Dimension	HxWxD	mm		834 x 1,239 x 330				
Weight	Empty	kg	89	9.5	89.5 / 90.0			
Exterior	Color / RAL code	-		Warm gray / RAL 7044				
	Voltage, phase, frequency	V, Ø, Hz	220 - 24	40, 1, 50	220 - 240, 1, 50 / 380 - 415, 3, 5			
Power supply	Standby power consumption	W		10				
	Recommended circuit breaker	А	16	20	25 / 16			

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 \sim 80°C Operating is available only when the booster heater is operating.

065



Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HM051MR U44

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature		Capacity (kW)						
-25℃ DB	5.50	5.50	5.50	5.50	-	-	-	-
-20℃ DB	5.50	5.50	5.50	5.50	5.23	-	-	-
-15℃ DB	5.50	5.50	5.50	5.50	5.23	5.23	-	-
-7℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
-2℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
2℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HM071MR U44

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature				Capaci	ity (kW)			
-25℃ DB	5.85	5.85	5.85	5.85	-	-	-	-
-20℃ DB	6.43	6.43	6.43	6.43	6.10	-	-	-
-15℃ DB	7.00	7.00	7.00	7.00	6.65	6.65	-	-
-7℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-4℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
-2℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
7℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
10℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
15℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
18℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00

HM091MR U44 / HM093MR U44

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature				Capaci	ty (kW)			
-25℃ DB	6.20	6.20	6.20	6.20	-	-	-	-
-20℃ DB	7.60	7.60	7.60	7.60	7.22	-	-	-
-15℃ DB	9.00	9.00	9.00	9.00	8.55	8.55	-	-
-7℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-4℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
-2℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
2℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00

Note

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),

LPM : Liters Per Minute (l/min), TC : Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.

• Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

• In accordance with the test standard (or nations), the rating will vary slightly.

4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum cooling capacity

HM051MR U44

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
30℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.29	5.32	5.36	5.38	5.41	5.43	5.45
45°C DB	5.09	5.15	5.21	5.25	5.31	5.36	5.40

HM071MR U44

Outdoor	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C	LWT 18 °C	LWT 20 °C	LWT 22 °C
Temperature		- Lurio e	1 200 10 0	Capacity (kW)	LITTIO C		20122
10℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
30℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40℃ DB	6.36	6.45	6.55	6.61	6.71	6.77	6.84
45℃ DB	5.71	5.82	5.92	5.99	6.10	6.17	6.24

HM091MR U44 / HM093MR U44

Outdoor	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C	LWT 18 °C	LWT 20 °C	LWT 22 °C
Temperature				Capacity (kW)			
10℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
30°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	7.66	7.66	7.65	7.65	7.65	7.65	7.65
45°C DB	6.31	6.35	6.39	6.42	6.45	6.48	6.51

Not

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),

LPM : Liters Per Minute (ℓ/\min), TC : Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.

• Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

• In accordance with the test standard (or nations), the rating will vary slightly.

4. The shaded areas are not guaranteed continuous operation.

[Unit: mm]

THERMA V... (R32) R32 MONOBLOC S


Y


Drawings


HM051MR U44 / HM071MR U44 / HM091MR U44 / HM093MR U44

[Unit: mm]

Side view



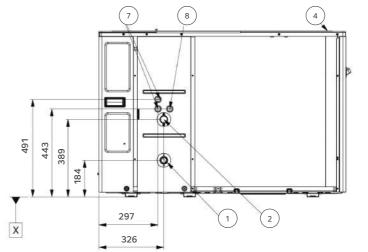



	UN3/UN4
i i	

1,239

No.	Part name	Description
1	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Strainer	Filtering and stacking particles inside circulating water
4	Top cover	-
5	Front panel	-
6	Side panel	-
7	Low voltage	Communication cable hole
8	Unit power	Power cable hole
9	Water pump	To circulate water inside the system
10	Plate heat exchanger	Heat exchange between refrigerant and water
11	Compressor shield panel	-
12	Safety valve	Open at water pressure 3 bar
13	Indoor control box	Indoor PCB and terminal blocks
14	Outdoor control box	Outdoor PCB and terminal blocks
15	Flow sensor	To measure the water flow rate (5-80 LPM)
16	Pressure sensor	To measure the water pressure (0-2 MPa)

THERMA V... (R32) R32 MONOBLOC S

Outdoor unit

HM121MR U34 HM141MR U34 HM161MR U34 HM123MR U34 HM143MR U34

HM163MR U34






















Key Components

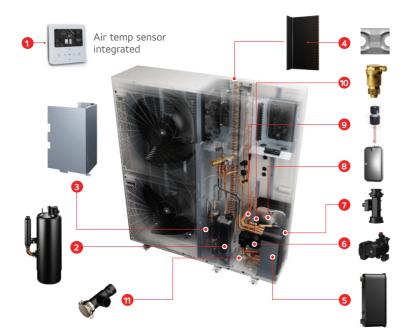

Components

- 1 Standard III remote controller 1), 2)
- 2 R1 Compressor
- 3 Compressor noise shield
- 4 Black Fin heat exchanger (ref/air)
- 5 Plate type heat exchanger (ref/water)
- 6 Water pump
- Water flow sensor
- 8 Expansion vessel (8 l)
- 9 Water pressure sensor
- Air vent valve
- 1 Strainer

The remote controller is supplied with the product, but it needs to be installed separately.
 Temperature control class (ERP class): V

Product Specification

Efficiency Data			12 kW (1 Ø) 12 kW (3 Ø)	14 kW (1 Ø) 14 kW (3 Ø)	16 kW (1 Ø) 16 kW (3 Ø)
Seasonal space heating eff. class (35°C / 55°C)			A+++ / A++	A+++ / A++	A+++ / A++
Seasonal space heating efficiency (η _s) (35°C / 55°C)			184 / 136	182 / 135	178 / 135
SCOP (35°C / 55°C)			4.67 / 3.47	4.62 / 3.46	4.53 / 3.45
Sound power level	Rated / low noise mode	dB(A)	60 / 56	61 / 57	
Sound pressure level at 5m Rated / low noise mode		dB(A)	38 / 34	39 / 35	

Nominal Capacity and COP,	Nominal Capacity and COP/EER												
Air +7℃ / water +35℃	Heating capacity / COP	kW / -	12.00 / 4.90	14.00 / 4.80	16.00 / 4.70								
Air +2℃ / water +35℃	Heating capacity / COP	kW / -	11.00 / 3.65	12.00 / 3.63	13.80 / 3.60								
Air +7℃ / water +55℃	Heating capacity / COP	kW / -	11.00 / 2.90	11.50 / 2.85	12.00 / 2.80								
Air +35℃ / water +18℃	Cooling capacity / EER	kW / -	12.00 / 4.75	14.00 / 4.30	16.00 / 4.00								
Air +35℃ / water +7℃	Cooling capacity / EER	kW / -	12.00 / 3.30	14.00 / 3.30	16.00 / 3.10								

Outdoor Units		Unit	HM121MR U34 HM123MR U34	HM141MR U34 HM143MR U34	HM161MR U34 HM163MR U34		
Operation range	Heating & DHW (Min. ~ Max.)	℃	-25 ~ 35				
(outdoor air temperature)	Cooling (Min. ~ Max.)	℃		5 ~ 48			
	Heating (Min. ~ Max.)	℃		15 ~ 65			
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	℃		5 ~ 27			
(,,,,,,	DHW (Min. ~ Max.)	℃		15 ~ 80			
	Туре	-					
Refrigerant	GWP	-	675				
	Precharged amount	g	2,000				
Piping connections (water)	Inlet / outlet diameter	inch	Male PT 1" a	according to ISO 7-1 (tapered pip	oe threads)		
Expansion vessel (heating circuit)	Volume	l		8			
Dimension	HxWxD	mm	1,380 x 1,239 x 330				
Weight	Empty	kg		119.1			
Exterior	Color / RAL code	-		Warm gray / RAL 7044			
	Voltage, phase, frequency	V, Ø, Hz	2	20 - 240,1,50 / 380 - 415, 3, 50)		
Power supply	Standby power consumption	W	10				
	Recommended circuit breaker	А	40 / 16				

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 \sim 80°C Operating is available only when the booster heater is operating.

Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HM121MR U34 / HM123MR U34

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C				
Temperature	Capacity (kW)											
-25℃ DB	9.50	9.50	9.50	9.50	-	-	-	-				
-20℃ DB	10.75	10.75	10.75	10.75	10.21	-	-	-				
-15℃ DB	12.00	12.00	12.00	12.00	11.50	11.50	-	-				
-7℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-				
-4℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				
-2℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				
2℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				
7℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				
10℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				
15℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				
18℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				
20℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				
35℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				

HM141MR U34 / HM143MR U34

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C				
Temperature	Capacity (kW)											
-25℃ DB	10.00	10.00	10.00	10.00	-	-	-	-				
-20℃ DB	12.00	12.00	12.00	12.00	11.40	-	-	-				
-15℃ DB	14.00	14.00	14.00	14.00	13.30	13.30	-	-				
-7℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-				
-4℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00				
-2℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00				
2℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00				
7℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00				
10℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00				
15℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00				
18℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00				
20℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00				
35℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00				

HM161MR U34 / HM163MR U34

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C				
Temperature		Capacity (kW)										
-25℃ DB	10.50	10.50	10.50	10.50	-	-	-	-				
-20℃ DB	13.25	13.25	13.25	13.25	12.59	-	-	-				
-15℃ DB	16.00	14.40	14.40	14.40	13.68	13.68	-	-				
-7℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-				
-4℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00				
-2℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00				
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00				
7℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00				
10℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00				
15℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00				
18℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00				
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00				
35℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00				

Note

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),

LPM : Liters Per Minute (l/min), TC : Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.

Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

In accordance with the test standard (or nations), the rating will vary slightly.

4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum cooling capacity

HM121MR U34 / HM123MR U34

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
30°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40℃ DB	11.05	11.19	11.33	11.43	11.57	11.67	11.76
45℃ DB	10.10	10.37	10.64	10.83	11.10	11.28	11.46

HM141MR U34 / HM143MR U34

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	12.50	12.80	13.10	13.30	13.60	13.80	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
30°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40°C DB	12.35	12.60	12.84	13.01	13.26	13.42	13.59
45°C DB	10.69	11.19	11.69	12.02	12.51	12.84	13.17

HM161MR U34 / HM163MR U34

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	13.00	13.60	14.20	14.60	15.20	15.60	16.00
20℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
30℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40°C DB	13.60	13.96	14.32	14.56	14.92	15.16	15.40
45°C DB	11.20	11.76	12,32	12.69	13.25	13.62	14.00

Not

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),

LPM: Liters Per Minute (l/min), TC: Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.


• Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

• In accordance with the test standard (or nations), the rating will vary slightly.


4. The shaded areas are not guaranteed continuous operation.

Drawings


HM121MR U34 / HM141MR U34 / HM161MR U34 HM123MR U34 / HM143MR U34 / HM163MR U34 [Unit: mm]

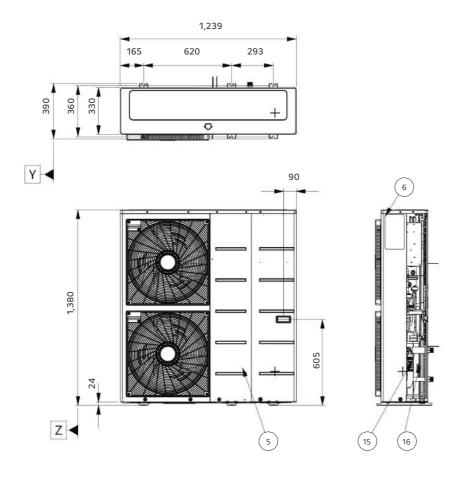


Side view









No.	Part name	Description
1	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Strainer	Filtering and stacking particles inside circulating water
4	Top cover	-
5	Front panel	-
6	Side panel	-
7	Low voltage	Communication cable hole
8	Unit power	Power cable hole
9	Water pump	To circulate water inside the system
10	Plate heat exchanger	Heat exchange between refrigerant and water
11	Compressor shield panel	-
12	Safety valve	Open at water pressure 3 bar
13	Indoor control box	Indoor PCB and terminal blocks
14	Outdoor control box	Outdoor PCB and terminal blocks
15	Flow sensor	To measure the water flow rate (5-80 LPM)
16	Pressure sensor	To measure the water pressure (0-2 MPa)

075

Electric Backup Heater

HA031M E1

HA061M E1

HA063M E1




Backup heater specification

Electrical spe	cification	Unit	HA031M E1	HA061M E1	HA063M E1
	Туре	-		Sheath	
Capacity o	Number of heating coil	EA	1	2	3
	Capacity combination	kW	3.0	3.0 + 3.0	2.0 + 2.0 + 2.0
	Heating steps	Step	1	2	1
heater	Power supply	V, Ø, Hz	220 ~ 2	220 ~ 240, 1, 50	
	Rated running current	А	12.5	25.0	8.7
	Dimensions (H x W x D)	mm		607 x 210 x 217	
	Net weight (unit)	kg	12.8	13.4	13.1
Wiring	Power supply cable (included earth, H07RN-F)	mm ² x cores	1.5 x 3 C	4.0 x 3 C	2.5 x 4 C
connections	Communication cable (H07RN-F)	mm ² x cores	0.75	x 4 C	0.75 x 2 C

- 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Wiring cable size must comply with the applicable local and national codes.

 Especially the power cable and circuit breaker should be selected in accordance with that.

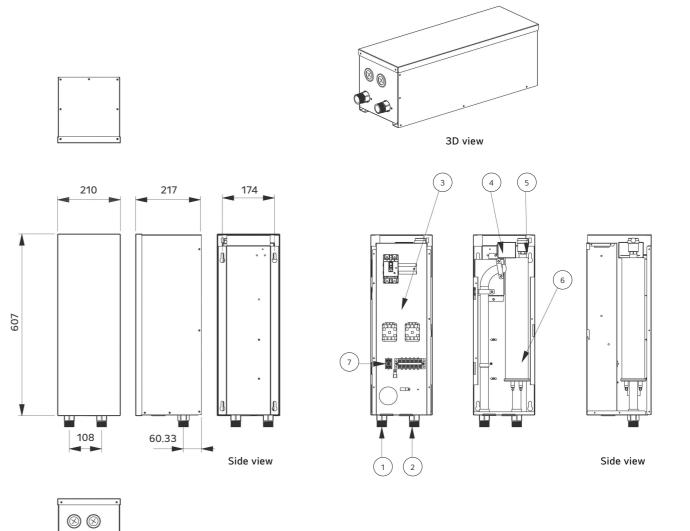

No.	Part name	Description		
1	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)		
2	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)		
3	Control box Circuit breaker, Magnetic switch, Terminal blocks			
4	Thermal switch	Cut-off power input to E/heater at 90°C		
5	Air vent	Air purging when charging water		
6	Electric heater	Support the space heating at very cold temperature and in case of emergency		
7	Backup heater outlet sensor	Connect to unit (heat pump)		

THERMAV

R32 Hydrosplit **Hydro Unit**





What is R32 Hydrosplit Hydro Unit

The LG THERMA V Hydrosplit series is a simple, safe heat pump that eliminating the risk of indoor refrigerant leakage by connecting outdoor unit and indoor unit using water piping.


Since the indoor unit of R32 Hydrosplit Hydro Unit is installed on the wall rather than on the floor, space is not wasted, and the light weight enables quick installation. This makes it perfect for renovation projects. Also, it has good maintainability because the indoor unit is located indoors, for example in a machine room.

Product Range

Phase	Capacity (kW)	Indoo	r Unit	Outdoor Unit		
	12			HU121MRB U30		
1 Ø	14			HU141MRB U30	LG LG	
	16	HN1600MC NK1	14	HU161MRB U30		
	12	HIN IOUUMIC INKT		HU123MRB U30		
3 Ø	14			HU143MRB U30		
	16			HU163MRB U30		



- Capacity range from 12 to 16 kW for renovation and large new build
- R32 refrigerant with reduced Global Warming Potential (GWP)
- No need for F-gas license and simple installation due to no refrigerant piping work
- Operation range down to -25℃
- Maximum flow temperature up to 65℃
- High level hydronic components integration for fast and clean installation

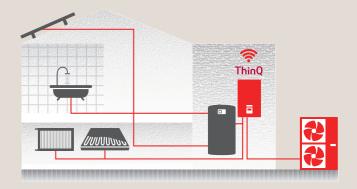

Excellent performance & efficiency

















User convenience





























Easy installation & maintenance







HIGHLIGHT OF R32 HYDROSPLIT HYDRO UNIT



Hydrosplit Concept

The THERMA V R32 Hydrosplit Hydro Unit connects an IDU and ODU by water pipes due to the heat exchanger's location in the outdoor unit, thus reducing the risk of indoor refrigerant leakage.



Simple Installation without Refrigerant Piping

- No need for F-gas license, because outdoor and indoor unit are connected by water pipes
- As hydronic parts are packaged inside indoor units, the installation can be realized with minimum usage of space
- Refrigerant is hermetically sealed inside outdoor unit




Remarkable Heating Performance even in Cold Weather

- Wide operation range down to -25℃
- 100 % heating capacity at -7°C ambient temp. (@ LWT 35°C)
- Reduces energy bills with the highest energy efficiency of A+++ (\otimes 35°C)



No Risk of Indoor Refrigerant Leakage

The Hydrosplit architecture, with no refrigerant circulating indoors, makes it possible to expand the living space, as the minimum floor area requirements do not apply.

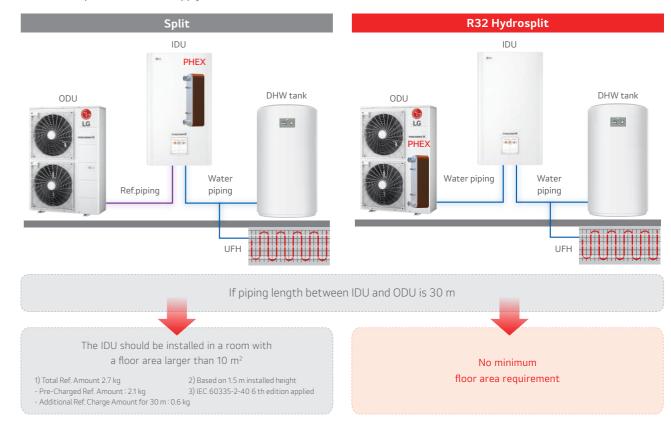

081

THERMA V. (R32) R32 HYDROSPLIT HYDRO UNIT

Outdoor unit

HU121MRB U30 / HU123MRB U30 HU141MRB U30 / HU143MRB U30 HU161MRB U30 / HU163MRB U30

Indoor unit

HN1600MC NK1








Key Components

Hydro Unit



Components

- Standard III remote controller ¹⁾
 (air temp. sensor integrated)
- 2 Flow sensor
- 3 Water pressure sensor
- 4 Air vent valve
- 5 Backup electric heater (6 kW, accessory)
- 6 Water pump
- 7 Expansion vessel (8 ℓ)8 Strainer

1) Temperature control class (ERP class): V

Connections

- A Heating circuit outlet pipe (male PT 1")
- B Heating circuit inlet pipe (male PT 1")
- © Outlet pipe to outdoor unit (male PT 1")
- Inlet pipe from outdoor unit (male PT 1")

Product Specification

Efficiency Data		Unit	12 kW (1 Ø) 12 kW (3 Ø)	14 kW (1 Ø) 14 kW (3 Ø)	16 kW (1 Ø) 16 kW (3 Ø)		
Seasonal space heating eff. cla	ss (35℃ / 55℃)	-	A+++/A++	A+++/A++	A+++/A++		
Seasonal space heating efficien	icy (η _s) (35℃ / 55℃)	%	181 / 137	180 / 136	179 / 135		
SCOP (35°C / 55°C)		-	4.60 / 3.50	4.57 / 3.47	4.55 / 3.45		
Sound power level (outdoor unit)	Rated / low noise mode	dB(A)	61 / 60	62 / 60	63 / 60		
Sound pressure level at 5m (outdoor unit)	Rated / low noise mode	dB(A)	39 / 38	40 / 38	41 / 38		
Sound power level (indoor unit)	Rated	dB(A)	A) 44				
Sound pressure level at 1m (indoor unit) Rated		dB(A)	36				

Nominal Capacity and COP/EER							
Air +7°C / water +35°C	Heating capacity / COP	kW / -	12.00 / 5.04	14.00 / 4.89	16.00 / 4.80		
Air +2°C / water +35°C	Heating capacity / COP	kW / -	11.00 / 3.65	12.00 / 3.63	13.80 / 3.60		
Air +7°C / water +55°C	Heating capacity / COP	kW / -	11.00 / 2.90	11.50 / 2.85	12.00 / 2.80		
Air +35℃ / water +18℃	Cooling capacity / EER	kW / -	12.00 / 4.75	14.00 / 4.30	16.00 / 4.00		
Air +35℃ / water +7℃	Cooling capacity / EER	kW / -	12.00 / 2.70	14.00 / 2.60	16.00 / 2.50		

Outdoor Units			HU121MRB U30 HU141MRB U30 HU161MRB U30 HU123MRB U30 HU143MRB U30 HU163MRB U30				
Operation range	Heating & DHW (Min. ~ Max.)	℃	-25 ~ 35				
(outdoor air temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 48				
	Туре	-	R32				
Refrigerant	GWP	-	675				
	Precharged amount	g	2,100				
Piping connections (water) Inlet / outlet diameter		inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)				
Dimension	HxWxD	mm	1,380 x 950 x 330				
Weight	Empty	kg	91.7				
Exterior	Color / RAL code	-	Warm gray / RAL 7044				
	Voltage, phase, frequency (10/30)	V, Ø, Hz	220 - 240, 1, 50 / 380 - 415, 3, 50				
Power supply	Standby power consumption	W	60				
	Recommended circuit breaker (10/30)	А	40 / 16				

Indoor Units		Unit	HN1600MC NK1
	Heating (Min. ~ Max.)	℃	15 ~ 65
•	Cooling (Min. ~ Max.)	°C	5 ~ 27
(leaving water temperature)	DHW (Min. ~ Max.)	°C	15 ~ 80
Expansion vessel (heating circuit)	Volume	l	8
	Outlet to outdoor unit	inch	
Piping connections (water)	Inlet from outdoor unit	inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)
riping connections (water)	Outlet to heat load	inch	Mate P1 1 according to 150 7-1 (tapered pipe tilleads)
	Inlet from heat load	inch	
Dimension	Dimension H x W x D		850 x 490 x 315
Weight Empty		kg	30.5
Exterior	Color / RAL code	-	Noble white / RAL 9016


Note

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 ~ 80°C Operating is available only when the booster heater is operating.

THERMA V... (R32) R32 HYDROSPLIT HYDRO UNIT

Accessory Parts (Optional Accessory)

Accessory backup heater for Hydrosplit Hydro Unit

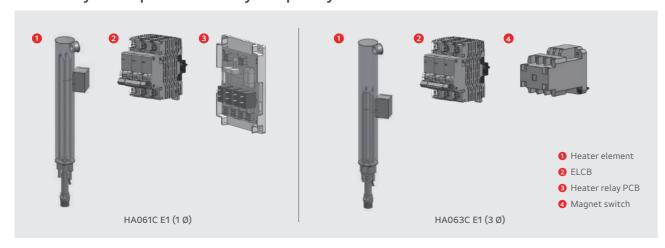

Electrical specification		Unit	HA061C E1	HA063C E1
	Capacity combination	kW	3.0 + 3.0	2.0 + 2.0 + 2.0
Packup bastor	Heating steps Steps 1	1		
Backup heater	Power supply	V, Ø, Hz	220 ~ 240, 1, 50	380 ~ 415, 3, 50
	Rated running current	А	24.0	8.7

^{*} The backup heater should be purchased and installed separately.

Supplied Parts

Strainer



Technical specification		Details		
Material	Body	Brass		
Material	Mesh	Stainless steel (STS304)		
Maah	Mesh no.	30		
Mesh	Max. particle size	0.6 mm		
Piping connection		Female G 1" according to ISO 228-1		



^{*} The strainer is supplied with the product, but it needs to be installed separately.

* This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.

Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HU121MRB U30 / HU123MRB U30 + HN1600MC NK1

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature	Capacity (kW)							
-25℃ DB	9.66	8.85	8.42	8.29	-	-	-	-
-20℃ DB	10.13	10.00	9.88	9.75	9.63	-	-	-
-15℃ DB	11.50	11.50	11.50	11.50	11.50	11.50	-	-
-7℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-
-4°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
-2℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
7℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
10℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
15℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
18℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 / HU143MRB U30 + HN1600MC NK1

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature		Capacity (kW)						
-25℃ DB	10.04	9.21	8.76	8.62	-	-	-	-
-20℃ DB	11.82	11.25	10.95	10.67	10.59	-	-	-
-15℃ DB	12.52	12.90	13.26	12.88	12.81	12.63	-	-
-7℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-
-4℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
-2℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
7℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
15℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
18℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1600MC NK1

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C	
Temperature		Capacity (kW)							
-25℃ DB	10.98	10.00	9.50	9.33	-	-	-	-	
-20℃ DB	13.43	12.54	12.03	11.78	11.47	-	-	-	
-15℃ DB	14.23	14.39	14.50	13.95	13.86	13.12	-	-	
-7℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-	
-4℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	
-2℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	
2℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	
7℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	
10℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	
15℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	
18℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	
20℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	
35℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	

Note

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM : Liters Per Minute (l/min), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum cooling capacity

HU121MRB U30 / HU123MRB U30 + HN1600MC NK1

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	12.00	12.00	12.00	12.00	12,00	12.00	12.00
20℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
30℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40℃ DB	11.75	12.00	12.00	12.00	12.00	12.00	12.00
45°C DB	11.50	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 / HU143MRB U30 + HN1600MC NK1

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
30℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40℃ DB	13.75	14.00	14.00	14.00	14.00	14.00	14.00
45℃ DB	13.50	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1600MC NK1


Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
30℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40°C DB	15.75	16.00	16.00	16.00	16.00	16.00	16.00
45°C DB	15.50	16.00	16.00	16.00	16.00	16.00	16.00

Not


- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM : Liters Per Minute (ℓ/min), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


Drawings

HU121MRB U30 / HU141MRB U30 / HU161MRB U30 HU123MRB U30 / HU143MRB U30 / HU163MRB U30 [Unit: mm]






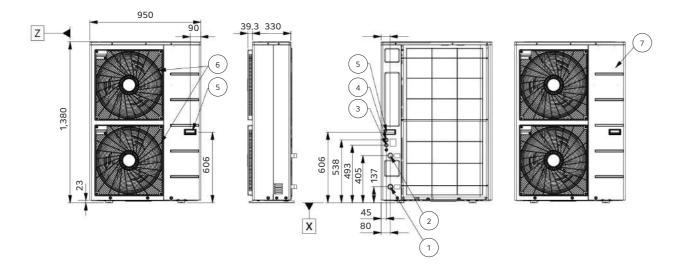




No.	Part name	Description
1	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Unit power	Power cable hole
4	Low voltage	Communication cable hole
5	Handle	-
6	Air outlet	-
7	Side panel	-

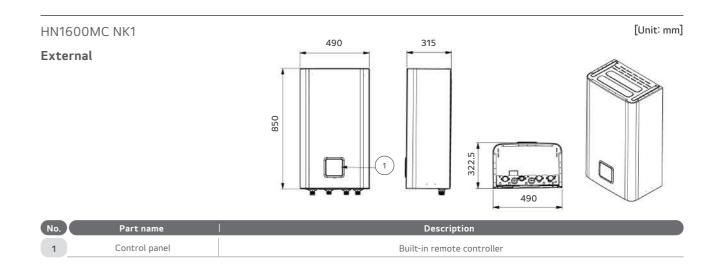

Internal

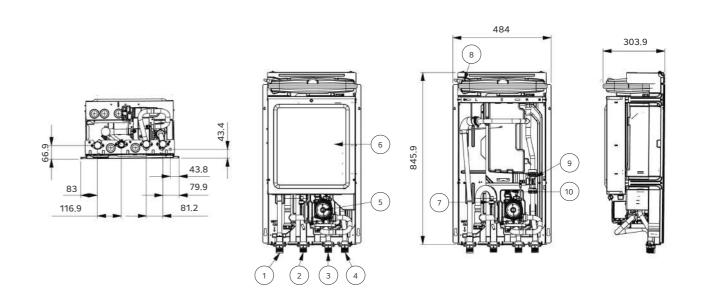

No.	Part name	Description
1	Heating circuit outlet pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Heating circuit inlet pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Outlet pipe to outdoor unit	Male PT 1" according to ISO 7-1 (tapered pipe threads)
4	Inlet pipe to outdoor unit	Male PT 1" according to ISO 7-1 (tapered pipe threads)
5	Water pump	To circulate water inside the system
6	Control box	PCB and Terminal blocks
7	Pressure sensor	To measure the water pressure (0-2MPa)
8	Expansion tank	8 Liter, 3/4" connection
9	Flow sensor	To measure the water flow rate (5-80 LPM)
10	Safety valve	Open at water pressure 3 bar

THERMAVI

R32 Hydrosplit **Combi Unit**



What is R32 Hydrosplit Combi Unit

The LG THERMA V Hydrosplit series is a simple, safe heat pump that eliminating the risk of indoor refrigerant leakage by connecting outdoor unit and indoor unit using water piping. R32 Hydrosplit Combi Unit is the perfect space-saving solution for heating, cooling and hot water supply due to its fully integrated hot water tank. This all-in-one solution's hydronic and domestic hot water components are pre-wired, reducing installation time and space occupancy, making it perfect for new builds.


Product Range

Phase	Capacity (kW)	Indoo	or Unit	Outdoo	or Unit
	12			HU121MRB U30	
1 Ø	14			HU141MRB U30	LG LG
	16	HN1616Y NB1		HU161MRB U30	
	12	HINTOTOT INDT		HU123MRB U30	
3 Ø	14			HU143MRB U30	
	16			HU163MRB U30	



Key Features

- Capacity range from 12 to 16 kW for renovation and large new build
- R32 refrigerant with reduced Global Warming Potential (GWP)
- No need for F-gas license and simple installation due to no refrigerant piping work
- Operation range down to -25℃
- Maximum flow temperature up to 65℃
- All-in-one Combi Unit with integrated hot water cylinder



Excellent performance & efficiency













User convenience






























Easy installation & maintenance








HIGHLIGHT OF R32 HYDROSPLIT COMBIUNIT

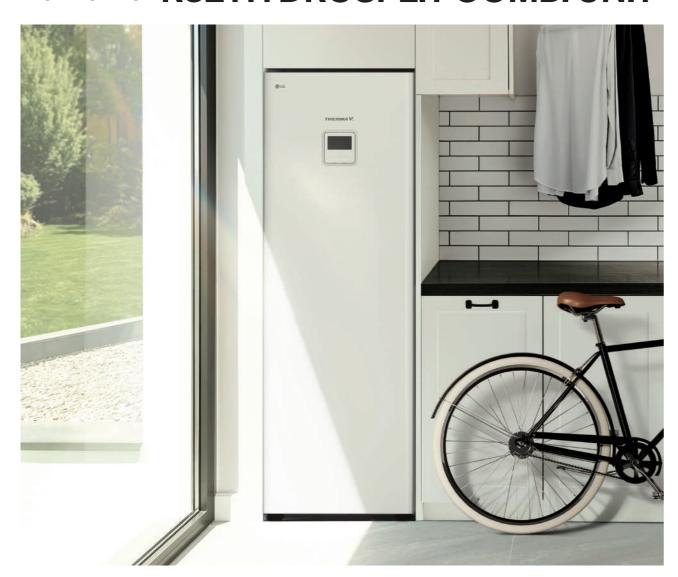



The THERMA V R32 Hydrosplit Combi Unit connects an IDU and ODU by water pipes due to the heat exchanger's location in the outdoor unit, thus reducing the risk of indoor refrigerant leakage.

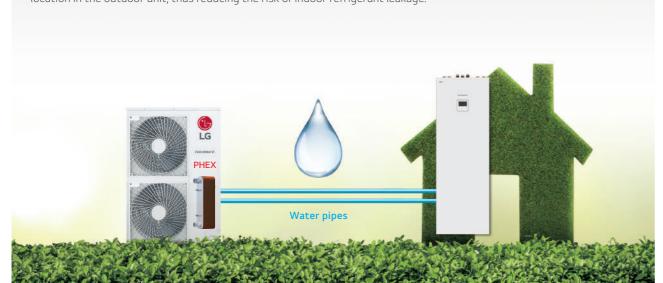

All-in-one Integration (Combi Unit)

- Integrated indoor unit with a hot water storage tank
- Saves space in the technical room with a small footprint
- Installation time reduced with pre-installed components
- Harmonized with other household appliances for a cohesive optorior.




Sophisticated and Harmonious Exterior

The indoor unit's sleek design fits into diverse indoor spaces, such as a utility or laundry room, a garage or a kitchen.



Save Space and Time

Unlike in the case of a conventional system, this all-in-one solution requires reduced installation time and saves valuable living space.



THERMA V. (R32) R32 HYDROSPLIT COMBI UNIT

Outdoor unit

HU121MRB U30 / HU123MRB U30 HU141MRB U30 / HU143MRB U30 HU161MRB U30 / HU163MRB U30

Indoor unit

HN1616Y NB1







Key Components

Combi Unit



Components

- 1 DHW storage tank (200 l)
- 2 Main water pump
- 3 Water pump for DHW charging
- 4 Plate heat exchanger for DHW (water / DHW)
- 5 Electric heater (max. 6 kW)
- 6 3-way diverting valve
- **7** Expansion vessel for heating (12 ℓ)
- 8 Flow sensor
- 9 Water pressure sensor
- ① Expansion vessel for DHW (8 ℓ , option)
- Buffer tank (40 ℓ, option)
- 2 Standard III remote controller 1) (attached on the front panel)
- 1) Temperature control class (ERP class): V

Connections

- A Inlet pipe from outdoor unit (female G1")
- 3 Outlet pipe to outdoor unit (female G1")
- O Domestic hot water outlet pipe (female G3/4")
- Domestic cold water outlet pipe (female G3/4")
- B DHW recirculation pipe (female G3/4")
- F Heating circuit inlet pipe (female G1")
- G Heating circuit outlet pipe (female G1")

Product Specification

Efficiency Data		Unit	12 kW (1 Ø) 12 kW (3 Ø)	14 kW (1 Ø) 14 kW (3 Ø)	16 kW (1 Ø) 16 kW (3 Ø)		
Seasonal space heating eff. class (35°C / 55°C)		-	A+++/A++	A+++/A++	A+++/A++		
Seasonal space heating efficie	ncy (η _s) (35℃ / 55℃)	%	181 / 137	180 / 136	179 / 135		
SCOP (35°C / 55°C)		-	4.60 / 3.50	4.57 / 3.47	4.55 / 3.45		
Declared load profile, average c	limate	-	L	L	L		
Water heating efficiency (η_{WH}),	average climate	%	120	120	120		
COP _{DHW,} average climate		-	2.74	2.74	2.74		
Water heating eff. class, averag	e climate	-	A+	A+	A+		
Annual energy consumption, DHW (average climate)		kWh		850			
Heating up time acc. to EN 16147 (average climate)		h/mn	1h25				
Max. usable water volume acc. to EN 16147 (average climate)		l	222				
Declared load profile, warmer c	imate	-	L	L	L		
Water heating efficiency (η_{WH}),	warmer climate	%	151	151	151		
COP _{DHW} , warmer climate		-	3.43	3.43	3.43		
Water heating eff. class, warme	r climate	-	A++	A++	A++		
Declared load profile, colder clin	mate	-	L	L	L		
Water heating efficiency (η_{WH}),	colder climate	%	101	101	101		
COP _{DHW} , colder climate		-	2.34	2.34	2.34		
Water heating eff. class, colder	climate	-	А	А	А		
Sound power level (outdoor unit)	Rated / low noise mode	dB(A)	61 / 60	62 / 60	63 / 60		
Sound pressure level at 5m (outdoor unit)	Rated / low noise mode	dB(A)	39 / 38	40 / 38	41 / 38		
Sound power level (indoor unit)	Rated	dB(A)		43			
Sound pressure level at 1m (indoor unit)	Rated	dB(A)		35			

Nominal Capacity and COP/EER							
Air +7℃ / water +35℃	Heating capacity / COP	kW / -	12.00 / 5.04	14.00 / 4.89	16.00 / 4.80		
Air +2℃ / water +35℃	Heating capacity / COP	kW / -	11.00 / 3.65	12.00 / 3.63	13.80 / 3.60		
Air +7℃ / water +55℃	Heating capacity / COP	kW / -	11.00 / 2.90	11.50 / 2.85	12.00 / 2.80		
Air +35℃ / water +18℃	Cooling capacity / EER	kW / -	12.00 / 4.75	14.00 / 4.30	16.00 / 4.00		
Air +35℃ / water +7℃	Cooling capacity / EER	kW / -	12.00 / 2,70	14.00 / 2.60	16.00 / 2.50		

Not

- Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 ~ 80°C Operating is available only when the booster heater is operating.

THERMA V. (32) R32 HYDROSPLIT COMBI UNIT

Product Specification

Outdoor Units			HU121MRB U30 HU141MRB U30 HU161MRB U30 HU123MRB U30 HU143MRB U30 HU163MRB U30				
Operation range	Heating & DHW (Min. ~ Max.)	°C	-25 ~ 35				
(outdoor air temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 48				
	Туре	-	R32				
Refrigerant	GWP	-	675				
	Precharged amount	g	2,100				
Piping connections (water)	Piping connections (water) Inlet / outlet diameter		Male PT 1" according to ISO 7-1 (tapered pipe threads)				
Dimension	HxWxD	mm	1,380 x 950 x 330				
Weight	Empty	kg	91.7				
Exterior	Color / RAL code	-	Warm gray / RAL 7044				
	Voltage, phase, frequency	V, Ø, Hz	220 - 240, 1, 50 / 380 - 415, 3, 50				
Power supply	Standby power consumption	W	60				
	Recommended circuit breaker	А	40 / 16				

Indoor Units		Unit	HN1616Y NB1
	Heating (Min. ~ Max.)	°C	15 ~ 65
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 27
(DHW (Min. ~ Max.)	°C	15 ~ 80
	Volume	l	200
Domestic hot water tank	Tank material	-	Enameled steel
	Standby losses		61
Expansion vessel (heating circuit)	Volume	l	12
	Capacity combination	kW	2.0 / 2.0 + 2.0 / 2.0 + 2.0 + 2.0
Electric heater	Heating steps	Steps	1
(Case 1 / Case 2 / Case 3)	Power supply	V, Ø, Hz	220 - 240, 1, 50 / 220 - 240, 1, 50 / 380 - 415, 3, 50
	Rated running current	А	8.7 / 17.4 / 8.7
	Outlet to outdoor unit	inch	
	Inlet from outdoor unit	inch	Famala Call according to ICO220 1 (according to the control
Di-i	Outlet to heat load	inch	Female G1" according to ISO228-1 (parallel pipe threads)
Piping connections (water)	Inlet from heat load	inch	
	Inlet / outlet diameter for DHW	inch	Famala C2/4"
	Recirculation	inch	Female G3/4" according to ISO228-1 (parallel pipe threads)
Dimension	HxWxD	mm	1,812 x 601 x 685
Weight	Empty	kg	130.0
Exterior	Color / RAL code	-	White / RAL 9002

Note

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 \sim 80°C Operating is available only when the booster heater is operating.

Accessory Parts (Optional Accessory)

Buffer tank for space heating



A standard 40 ℓ buffer tank for can be installed as an optional accessory for space heating. Fitting seamlessly into the main casing, it can be attached to the backside of the indoor unit.

Electrical specification		Unit	OSHB-40KT.AEU		
Water volume		l	40		
Dimensions (H x W x D)		mm	560 x 518 x 175		
Weight (w/o water) Product		kg	24		

 $[\]mbox{\ensuremath{\star}}$ The buffer tank for space heating should be purchased and installed separately.

Expansion vessel for DHW



A standard 8 ℓ DHW expansion vessel, that conveniently fits inside the indoor unit, can be installed as an optional accessory. It is provided with an accessory kit that includes a flexible connection tube.

Electrical specification	Unit	OSHE-12KT.AEU
Water volume	l	8
Connection	inch	3/4
Max. pressure	bar	10
Pre-charge	bar	3
Dimensions (H x W x D)	mm	238 x 416 x 502
Weight (w/o water) Product	kg	2.5

 $[\]ensuremath{^{\star}}$ The expansion vessel for DHW should be purchased and installed separately.

Supplied Parts

Shut-off valve



Shut-off valve with strainer



Strainer



Technical specification		Details			
Material	Body	Brass			
матепаі	Mesh	Stainless steel (STS304)			
Mesh	Mesh no.	30			
меѕп	Max. particle size	0.6 mm			
Piping connection		Female G 1" according to ISO 228-1			

^{*} The strainer and valves are supplied with the product, but it need to be installed separately.

^{*} This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.

097

THERMA V. (32) R32 HYDROSPLIT COMBI UNIT

Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HU121MRB U30 / HU123MRB U30 + HN1616Y NB1

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C			
Temperature		Capacity (kW)									
-25℃ DB	9.66	8.85	8.42	8.29	-	-	-	-			
-20℃ DB	10.13	10.00	9.88	9.75	9.63	-	-	-			
-15℃ DB	11.50	11.50	11.50	11.50	11.50	11.50	-	-			
-7℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-			
-4℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00			
-2℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00			
2℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00			
7℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00			
10℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00			
15℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00			
18℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00			
20℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00			
35℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00			

HU141MRB U30 / HU143MRB U30 + HN1616Y NB1

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature				Capaci	ty (kW)			
-25℃ DB	10.04	9.21	8.76	8.62	-	-	-	-
-20℃ DB	11.82	11.25	10.95	10.67	10.59	-	-	-
-15℃ DB	12.52	12.90	13.26	12.88	12.81	12.63	-	-
-7℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-
-4℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
-2℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
2℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
7℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
15℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
18℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1616Y NB1

	,							
Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature				Capac	ity (kW)			
-25℃ DB	10.98	10.00	9.50	9.33	-	-	-	-
-20℃ DB	13.43	12.54	12.03	11.78	11.47	-	-	-
-15℃ DB	14.23	14.39	14.50	13.95	13.86	13.12	-	-
-7℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-
-4℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

Note

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM : Liters Per Minute (l/min), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum cooling capacity

HU121MRB U30 / HU123MRB U30 + HN1616Y NB1

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
30℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35℃ DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40℃ DB	11.75	12.00	12.00	12.00	12.00	12.00	12.00
45℃ DB	11.50	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 / HU143MRB U30 + HN1616Y NB1

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
30℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35℃ DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40°C DB	13.75	14.00	14.00	14.00	14.00	14.00	14.00
45°C DB	13.50	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1616Y NB1


Outdoor	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C	LWT 18 °C	LWT 20 °C	LWT 22 °C
Temperature				Capacity (kW)			
10℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
30℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35℃ DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40℃ DB	15.75	16.00	16.00	16.00	16.00	16.00	16.00
45℃ DB	15.50	16.00	16.00	16.00	16.00	16.00	16.00

Not


- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute (l/min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


Drawings


HU121MRB U30 / HU141MRB U30 / HU161MRB U30 HU123MRB U30 / HU143MRB U30 / HU163MRB U30 [Unit: mm]





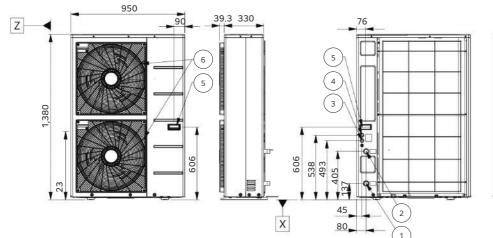








_		
No.	Part name	Description
1	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Unit power	Power cable hole
4	Low voltage	Communication cable hole
5	Handle	-
6	Air outlet	-
7	Side panel	-

HN1616Y NB1





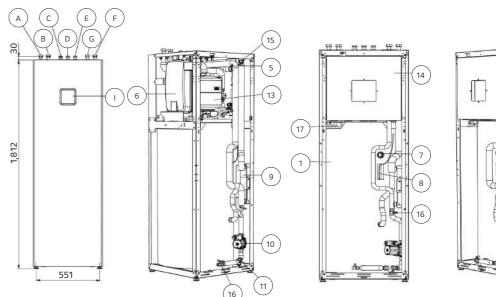

No.	Part name	Description
1	Domestic hot water tank	200 l
2	Electric heater	Max 6 kW
3	Flow sensor	To measure the water flow rate (5-80 LPM)
4	3 way valve	Heating / DHW circuit
5	Water pressure sensor	To measure the water pressure (0-2 MPa)
6	Expansion vessel	12 ℓ for heating circuit
7	Magnesium anode	To prevent corrosion
8	DHW tank sensor	Temperature sensor
9	Plate heat exchanger	Heat exchange (water / DHW tank)
10	DHW charging pump	To circulate water for DHW heating
11	Strainer for DHW tank	Filtering and stacking particles
12	Main water pump	To circulate water inside the system
13	Expansion vessel	8 l For DHW circuit (accessory)
14	Control box	PCB and terminal blocks
15	Air vent	Air purging when charging water
16	Drain cock	Valve for water draining
17	Electrical conduits	For electric wiring

No.	Part name	Description
Α	Inlet pipe from outdoor unit	Female G1"
В	Outlet pipe to outdoor unit	Female G1"
С	Domestic hot water outlet pipe	Female G3/4"
D	Domestic cold water inlet pipe	Female G3/4"
Е	Domestic re-circulation pipe	Female G3/4"
F	Heating circuit outlet pipe	Female G1"
G	Heating circuit inlet pipe	Female G1"
Н	Electrical conduits	For electric wiring
1	Control panel	Built-in remote controller
		Baile in remote controller

THERMAVI

R32 Split **Hydro Unit**









What is R32 Split Hydro Unit

The LG THERMA V Split series is a heat pump that is easy, flexible to install. As the expression "split" suggests, the outdoor and indoor units are connected by refrigerant piping, thus freezing will not compromise this unit regardless of outdoor ambient temperatures.

THERMA V Split Hydro Unit is a combination of an outdoor unit and an indoor Hydro Unit with built-in hydronic components such as a plate heat exchanger, expansion

The outdoor unit is on offer in 4/6 kW and 5/7/9 kW capacity range. R32 Split 4/6 kW model is suitable for new build houses that are well insulated and require a small heating load, while R32 Split 5/7/9 kW model is adapted for both new build and renovation projects.


Product Range

Phase	Capacity (kW)	Indoo	or Unit	Outdoor Unit		
	4	LINIOCAZNA NIKE	*	HU041MR U20	es l	
	6	HN0613M NK5	=	HU061MR U20		
1 Ø	5		# 1	HU051MR U44	- O	
	7	HN091MR NK5	=	HU071MR U44		
	9		=	HU091MR U44		



Key Features

- Capacity range from 4 and 6 kW for new build and 5 to 9 kW for new build or small renovation
- R32 refrigerant with reduced Global Warming Potential (GWP)
- Maximum flow temperature up to 55°C (4/6 kW) and 65°C
- Operation range down to -20°C (4/6 kW) and -25°C (5/7/9 kW)
- High level hydronic components integration for fast and clean installation

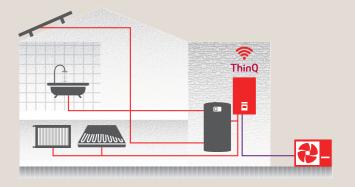

Excellent performance & efficiency















User convenience





















Easy installation & maintenance











THERMA V_m (R32)

HIGHLIGHT OF R32 SPLIT HYDRO UNIT

No Potential Risk of Piping Freezing

- Robust to cold ambient thanks to refrigerant piping
- No exposed piping freezing even during prolonged blackouts



High Installation Flexibility Not Restricted by the Site Condition

- Light weight and compact size
- Allows a maximum refrigerant pipe length of 50 m and offers 3-way piping connection availability (R32 Split 5/7/9 kW Split)
- Eliminates minimum floor area requirements due to R32 refrigerant (R32 Split 4/6 kW)



Small Refrigerant Amount


- free from minimum floor area requirements due to R32 refrigerant

ONLY4/6kW

Minimum floor space requirements do not apply to R32 Split 4/6 kW, as the maximum refrigerant amount (including 30 m pipes) used in the product is smaller than the minimum set by regulation. As a result, there are more opportunities for flexible design and installation.








Reduced Noise Level

Browse now Q
ONLY 4/6 kW

The R32 Split outdoor unit can be installed at the minimum of 4.5 m away¹⁾ from neighboring houses while complying with noise-related requirements in most European countries, including Germany. (based on 4 kW ODU & low noise mode)

Descri	ption	Germany	Austria	Switzerland	Netherlands
	Day time	50 dB (A) (06:00 ~ 22:00)	40 dB (A) (06:00 ~ 19:00)	40 dB (A) (07:00 ~ 19:00)	45 dB (A) (07:00 ~ 19:00)
Sound pressure threshold	Evening	-	35 dB (A) (19:00 ~ 22:00)	-	-
	Night time	35 dB (A) (22:00 ~ 06:00)	30 dB (A) (22:00 ~ 06:00)	35 dB (A) (19:00 ~ 07:00)	40 dB (A) (19:00 ~ 07:00)






- $1) \\ \text{Minimum distance to be away from a neighboring property may vary depending on installation conditions and noise regulations in individual countries$
- 2) Sound pressure level is converted from sound power level of low noise mode based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2.

Flexible Refrigerant Piping Design

ONLY5/7/9 kW

Installation flexibility is enabled by THERMA V Split's long pipe length (up to 50 m) and the fact that the refrigerant piping can be connected in three directions: front, side and rear.

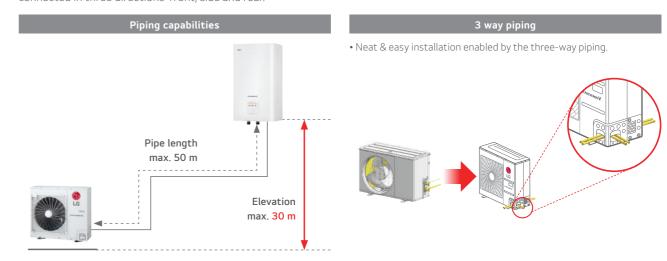

THERMA V. (R32) R32 SPLIT HYDRO UNIT (4 / 6 kW)

Outdoor unit

HU041MR U20 HU061MR U20

Indoor unit

HN0613M NK5























Key Components

Hydro Unit



Components

- Standard III remote controller¹⁾ (air temp. sensor integrated)
- 2 Water pump
- 3 Water pressure sensor
- 4 Flow sensor
- 5 Plate type heat exchanger (ref/water)
- 6 Air vent valve
- 7 Expansion vessel (8 l)
- 8 Back up electric heater (3 kW)
- Safety valve
- 10 Strainer

1) Temperature control class (ERP class): V

Connections

- A Heating circuit outlet pipe (male PT 1" *)
- B Heating circuit inlet pipe (male PT 1" *)
- © Refrigerant liquid pipe (SAE 1/4" with connector **)
- D Refrigerant gas pipe (SAE 1/2" with connector **)
- * According to ISO 7-1 (tapered pipe threads)
- ** In case of Split 4/6 kW model, the adaptors provided with the outdoor unit must be separately installed on the gas/liquid connection of the indoor unit when connecting the refrigerant pipe. After installing the adaptors, the liquid and gas connection size becomes Ø 6.35 (1/4 inch) and Ø 12.7 (1/2 inch) respectively.

Product Specification

Efficiency Data		Unit	4 kW (1 Ø)	6 kW (1 Ø)
Seasonal space heating eff. class (35°C / 59	5℃)	-	A+++ / A++	A+++ / A++
Seasonal space heating efficiency (η_s) (35°C	%	183 / 126	183 / 126	
SCOP (35°C / 55°C)		-	4.65 / 3.23	4.65 / 3.23
Sound power level (outdoor unit)	Rated / low noise mode	dB(A)	57 / 56	58 / 57
Sound pressure level at 5m (outdoor unit)	Rated / low noise mode	dB(A)	35 / 34	36 / 35
Sound power level (indoor unit)	Rated	dB(A)	4	14
Sound pressure level at 1m (indoor unit)	Rated	dB(A)	3	36

Nominal Capacity and COP/EER							
Air +7°C / water +35°C	Heating capacity / COP	kW / -	4.00 / 5.10	6.00 / 4.95			
Air +2°C / water +35°C	Heating capacity / COP	kW / -	3.60 / 3.75	4.80 / 3.65			
Air -7°C / water +35°C	Heating capacity / COP	kW / -	4.00 / 3.08	6.00 / 2.98			
Air +7℃ / water +55℃	Heating capacity / COP	kW / -	3.70 / 2.85	4.60 / 2.90			
Air -7°C / water +55°C	Heating capacity / COP	kW / -	3.70 / 1.80	4.60 / 1.80			
Air +35°C / water +18°C	Cooling capacity / EER	kW / -	4.00 / 4.80	6.00 / 4.80			
Air +35°C / water +7°C	Cooling capacity / EER	kW / -	4.00 / 3.40	6.00 / 3.20			

Outdoor Units		Unit	HU041MR U20	HU061MR U20	
2	Heating & DHW (Min. ~ Max.)	℃	-20	~ 35	
Operation range (outdoor air temperature)	Cooling (Min. ~ Max.)	°C	5 ~	48	
	Туре	-	R:	32	
Refrigerant	GWP	-	67	75	
	Precharged amount	g	1,1	00	
	Gas / Liquid	mm (inch)	Ø 12.7 (1/2) /	Ø 6.35 (1/4)	
	Length standard / Max.	m	5 /	5 / 30	
Piping connections (water)	Level difference Max.	m	3	30	
-iping connections (water)	Max. length without additional charge	m	1	10	
	Mass of additional ref. charge	g/m	2	0	
Dimension	HxWxD	mm	650 x 87	70 x 330	
Veight	Empty	kg	44	1.7	
Exterior	Color / RAL code	-	Warm gray	/ RAL 7044	
	Voltage, phase, frequency	V, Ø, Hz	220 - 240, 1, 50		
Power supply	Standby power consumption	W	2	0	
	Recommended circuit breaker	Α	16	20	

Indoor Units		Unit	HN0613M NK5
	Heating (Min. ~ Max.)	℃	15 ~ 55
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 27
	DHW (Min. ~ Max.)	℃	15 ~ 80
Expansion vessel (heating circuit)	Volume	L	8
	Capacity combination	kW	1.5 + 1.5
Dealers beater	Heating steps	Steps	2
Backup heater	Power supply	V, Ø, Hz	220 - 240, 1, 50
	Rated running current	А	13.0
Piping connections (water)	Inlet / outlet diameter	inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)
Piping connections (ref.)	Gas / Liquid	mm (inch)	Ø 12.7 (1/2) / Ø 6.35 (1/4)
Dimension	HxWxD	mm	850 x 490 x 315
Weight	Empty	kg	37.8
Exterior	Color / RAL code	-	Noble white / RAL 9016

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of O dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 50 ~ 80°C Operating is available only when the booster heater is operating.

Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HU041MR U20 + HN0613M NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C		
Temperature	Capacity (kW)							
-20°C DB	4.00	4.00	4.00	4.00	-	-		
-15°C DB	4.00	4.00	4.00	4.00	4.00	-		
-7°C DB	4.00	4.00	4.00	4.00	4.00	4.00		
-4°C DB	4.00	4.00	4.00	4.00	4.00	4.00		
-2°C DB	4.00	4.00	4.00	4.00	4.00	4.00		
2°C DB	4.00	4.00	4.00	4.00	4.00	4.00		
7°C DB	4.00	4.00	4.00	4.00	4.00	4.00		
10°C DB	4.00	4.00	4.00	4.00	4.00	4.00		
15°C DB	4.00	4.00	4.00	4.00	4.00	4.00		
18°C DB	4.00	4.00	4.00	4.00	4.00	4.00		
20°C DB	4.00	4.00	4.00	4.00	4.00	4.00		
35°C DB	4.00	4.00	4.00	4.00	4.00	4.00		

HU061MR U20 + HN0613M NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C
Temperature			Capaci	ty (kW)		
-20°C DB	4.92	4.78	4.64	4.50	-	-
-15°C DB	5.56	5.52	5.48	5.44	5.40	-
-7°C DB	6.00	6.00	6.00	6.00	6.00	6.00
-4°C DB	6.00	6.00	6.00	6.00	6.00	6.00
-2°C DB	6.00	6.00	6.00	6.00	6.00	6.00
2°C DB	6.00	6.00	6.00	6.00	6.00	6.00
7°C DB	6.00	6.00	6.00	6.00	6.00	6.00
10°C DB	6.00	6.00	6.00	6.00	6.00	6.00
15°C DB	6.00	6.00	6.00	6.00	6.00	6.00
18°C DB	6.00	6.00	6.00	6.00	6.00	6.00
20°C DB	6.00	6.00	6.00	6.00	6.00	6.00
35°C DB	6.00	6.00	6.00	6.00	6.00	6.00

Note

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM : Liters Per Minute (ℓ /min), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum cooling capacity

HU041MR U20 + HN0613M NK5

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
20℃ DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
30°C DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
35℃ DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
40℃ DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
45℃ DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00

HU061MR U20 + HN0613M NK5


Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	6.00	6.00	6.00	6.00	6.00	6.00	6.00
20℃ DB	6.00	6.00	6.00	6.00	6.00	6.00	6.00
30°C DB	6.00	6.00	6.00	6.00	6.00	6.00	6.00
35℃ DB	6.00	6.00	6.00	6.00	6.00	6.00	6.00
40°C DB	5.74	5.81	5.87	5.91	6.00	6.00	6.00
45°C DB	5.48	5.61	5.73	5.81	5.94	6.00	6.00


Not

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM : Liters Per Minute (ℓ/\min), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


Drawings

HU041MR U20 / HU061MR U20 [Unit: mm]

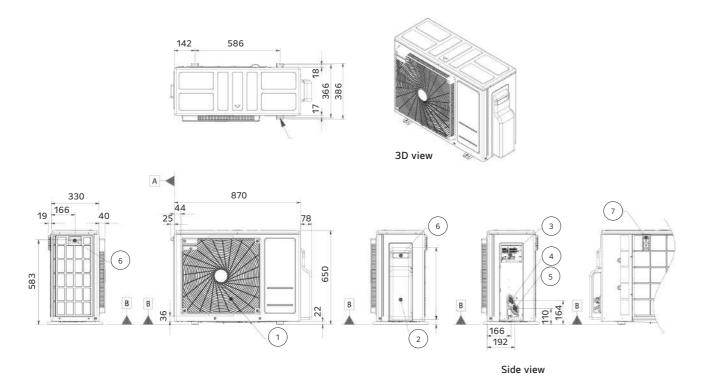




No.	Part name	Description
1	Air outlet	-
2	Control cover & SVC valve cover	-
3	Power and communication cable connection	-
4	Gas pipe connection	Flare joint
5	Liquid pipe connection	Flare joint
6	Handle	-
7	Intake air temperature sensor cover	-

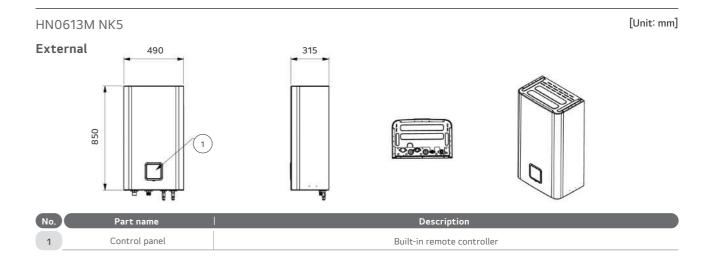

Internal

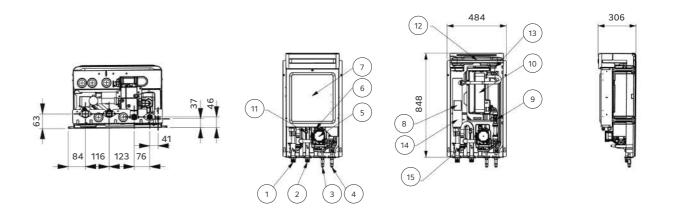

No.	Part name	Description			
1	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)			
2	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)			
3	Refrigerant piping connection	Ø 6.35 ¹⁾ (mm)			
4	Refrigerant piping connection	Ø 12.7 ¹⁾ (mm)			
5	Water pump	To circulate water inside the system			
6	Safety valve	Open at water pressure 3 bar			
7	Control box	PCB and terminal blocks			
8	Thermostat	Cut-off power input to electric heater at 90°C			
9	Flow sensor	To measure the water flow rate (5-80 LPM)			
10	Plate heat exchanger	Heat exchange between refrigerant and water			
11	Pressure sensor	To measure the water pressure (0-2 MPa)			
12	Expansion tank	Absorbing volume change of heated water			
13	Air vent	Air purging when charging water			
14	Backup heater	3 kW			
15	Strainer	Filtering and stacking particles inside circulating water			

¹⁾ When connecting the refrigerant pipe, the adaptors provided with the outdoor unit must be installed on the connection of the indoor unit.

THERMA V. (32) R32 SPLIT HYDRO UNIT (5 / 7 / 9 kW)

Outdoor unit

HU051MR U44 HU071MR U44 HU091MR U44

Indoor unit

HN091MR NK5


























Key Components

Hydro Unit

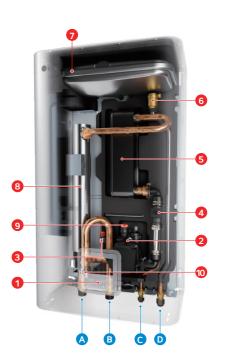

Components

- Standard III remote controller¹⁾ (air temp. sensor integrated)
- 2 Water pump
- 3 Water pressure sensor
- 4 Flow sensor
- 5 Plate type heat exchanger (ref/water)
- 6 Air vent valve
- 7 Expansion vessel (8 l)
- 8 Back up electric heater (3 kW)
- Safety valve
- 10 Strainer

1) Temperature control class (ERP class) : V

Connections

- A Heating circuit outlet pipe (male PT 1" *)
- B Heating circuit inlet pipe (male PT 1" *)
- © Refrigerant liquid pipe (SAE 3/8")
- D Refrigerant gas pipe (SAE 5/8")
- * According to ISO 7-1 (tapered pipe threads)

Product Specification

Efficiency Data		Unit	5 kW (1 Ø)	7 kW (1 Ø)	9 kW (1 Ø)
Seasonal space heating eff. class (35℃ / 55	5°C)	-	A+++ / A++	A+++ / A++	A+++ / A++
Seasonal space heating efficiency (η _s) (35°C / 55°C)		%	183 / 126	183 / 126	183 / 126
SCOP (35°C / 55°C)		-	4.65 / 3.23	4.65 / 3.23	4.65 / 3.23
Sound power level (outdoor unit) Rated / low noise mode		dB(A)	60 / 58		
Sound pressure level at 5m (outdoor unit)	Rated / low noise mode	dB(A)	38 / 36		
Sound power level (indoor unit) Rated		dB(A)	44		
Sound pressure level at 1 m (indoor unit)	Rated	dB(A)		36	

Nominal Capacity and COP/EER								
Air +7℃ / water +35℃	Heating capacity / COP	kW / -	5.50 / 4.90	7.00 / 4.90	9.00 / 4.65			
Air +2℃ / water +35℃	Heating capacity / COP	kW / -	3.30 / 3.52	4.20 / 3.51	5.40 / 3.50			
Air +7°C / water +55°C	Heating capacity / COP	kW / -	5.50 / 2.70	5.50 / 2.70	5.50 / 2.70			
Air +35℃ / water +18℃	Cooling capacity / EER	kW / -	5.50 / 4.60	7.00 / 4.50	9.00 / 4.20			
Air +35℃ / water +7℃	Cooling capacity / EER	kW / -	5.50 / 2.80	7.00 / 2.70	9.00 / 2.60			

Outdoor Units		Unit	HU051MR U44	HU071MR U44	HU091MR U44		
Operation range	Heating & DHW (Min. ~ Max.)	°C	-25 ~ 35				
(outdoor air temperature)	Cooling (Min. ~ Max.)	$^{\circ}$		5 ~ 48			
	Туре	-		R32			
Refrigerant	GWP	-	675				
	Precharged amount	g	1,500				
	Gas / Liquid	mm (inch)	Ø 15.88 (5/8) / Ø 9.52 (3/8)				
	Length standard / Min. / Max.	m	5 / 50				
Piping connections (ref.)	Level difference Max.	m	30				
	Max. length without additional charge	m	10				
	Mass of additional ref. charge	g/m		40			
Dimension	HxWxD	mm		834 x 950 x 330			
Weight	Empty	kg		60.0			
Exterior	Color / RAL code	-		Warm gray / RAL 7044			
	Voltage, phase, frequency	V, Ø, Hz	z 220 - 240, 1, 50				
Power supply	Standby power consumption	W		20			
	Recommended circuit breaker	Α	20	25	30		

Indoor Units		Unit	HN091MR NK5
	Heating (Min. ~ Max.)	℃	15 ~ 65
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 27
(leaving water temperature)	DHW (Min. ~ Max.)	°C	15 ~ 80
Expansion vessel (heating circuit)	Volume	l	8
	Capacity combination	kW	3.0 + 3.0
Dealers hantes	Heating steps	Steps	2
Backup heater	Power supply	V, Ø, Hz	220 - 240, 1, 50
	Rated running current	А	25.0
Piping connections (water)	Inlet / outlet diameter	inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)
Piping connections (ref.)	Gas / Liquid	mm (inch)	Ø 15.88 (5/8) / Ø 9.52 (3/8)
Dimension	HxWxD	mm	850 x 490 x 315
Weight	Empty	kg	38.1
Exterior	Color / RAL code	-	Noble white / RAL 9016

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that.

 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 ~ 80°C Operating is available only when the booster heater is operating.

Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HU051MR U44 + HN091MR NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature				Capaci	ty (kW)			
-25℃ DB	4.02	3.90	3.78	3.66	-	-	-	-
-20℃ DB	4.64	4.51	4.38	4.26	4.13	-	-	-
-15℃ DB	5.26	5.12	4.99	4.85	4.72	4.58	-	-
-7℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-2℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
2℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HU071MR U44 + HN091MR NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C	
Temperature	Capacity (kW)								
-25℃ DB	5.00	4.85	4.71	4.56	-	-	-	-	
-20℃ DB	5.58	5.43	5.27	5.11	4.95	-	-	-	
-15℃ DB	6.17	6.00	5.83	5.66	5.49	5.32	-	-	
-7℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-	
-4℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-	
-2℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-	
2℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	
7℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	
10℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	
15℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	
18℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	
20℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	
35℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	

HU091MR U44 + HN091MR NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature				Capaci	ty (kW)			
-25℃ DB	6.40	6.20	6.00	5.80	-	-	-	-
-20℃ DB	7.23	7.00	6.77	6.54	6.31	-	-	-
-15℃ DB	8.06	7.80	7.54	7.28	7.02	6.76	-	-
-7℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-4℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-2℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00

Note

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),

LPM: Liters Per Minute (l/min), TC: Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.

• Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

• In accordance with the test standard (or nations), the rating will vary slightly.

4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum cooling capacity

HU051MR U44 + HN091MR NK5

Outdoor	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C	LWT 18 °C	LWT 20 °C	LWT 22 °C
Temperature				Capacity (kW)			
10℃ DB	6.42	6.95	7.49	7.85	8.39	8.75	9.11
20°C DB	6.05	6.37	6.70	6.91	7.23	7.45	7.66
30°C DB	5.68	5.79	5.90	5.97	6.08	6.15	6.22
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.32	5.34	5.35	5.37	5.38	5.40	5.41
45°C DB	5.13	5.17	5.21	5.23	5.27	5.29	5.32

HU071MR U44 + HN091MR NK5

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	8.17	8.85	9.54	9.99	10.68	11.13	11.59
20℃ DB	7.70	8.11	8.52	8.80	9.21	9.48	9.75
30°C DB	7.23	7.37	7.51	7.60	7.74	7.83	7.92
35℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40°C DB	6.77	6.79	6.81	6.83	6.85	6.87	6.88
45°C DB	6.53	6.58	6.63	6.66	6.70	6.74	6.77

HU091MR U44 + HN091MR NK5

Outdoor	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C	LWT 18 °C	LWT 20 °C	LWT 22 °C
Temperature				Capacity (kW)			
10℃ DB	10.50	11.38	12.26	12.85	13.73	14.31	14.90
20°C DB	9.90	10.43	10.96	11.31	11.84	12.19	12.54
30°C DB	9.30	9.48	9.65	9.77	9.95	10.06	10.18
35℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40℃ DB	8.70	8.73	8.76	8.78	8.81	8.83	8.85
45°C DB	8.40	8.46	8.52	8.56	8.62	8.66	8.70
45 C DB	8.40	8.46	8.52	8.56	8.62	8.66	8.70

No

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),

LPM : Liters Per Minute (ℓ /min), TC : Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.

Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

• In accordance with the test standard (or nations), the rating will vary slightly.


4. The shaded areas are not guaranteed continuous operation.

THERMA V. (R32) R32 SPLIT HYDRO UNIT (5 / 7 / 9 kW)


Drawings


HU051MR U44 / HU071MR U44 / HU091MR U44


[Unit: mm]






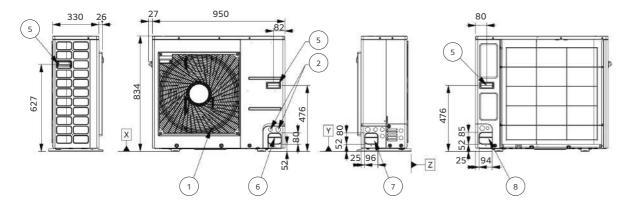









No.	Part name	Description
1	Air outlet	-
2	Power and communication cable hole	-
3	Gas pipe connection	Flare joint
4	Liquid pipe connection	Flare joint
5	Handle	-
6	Pipe routing hole (front)	-
7	Pipe routing hole (side)	-
8	Pipe routing hole (back)	-

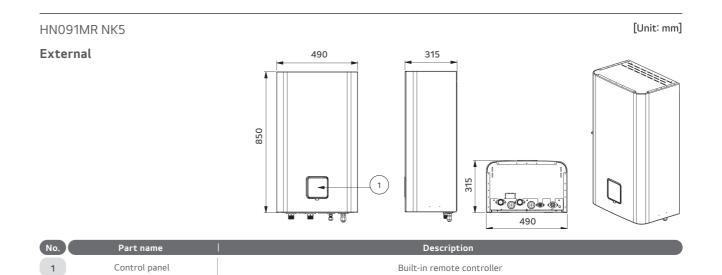

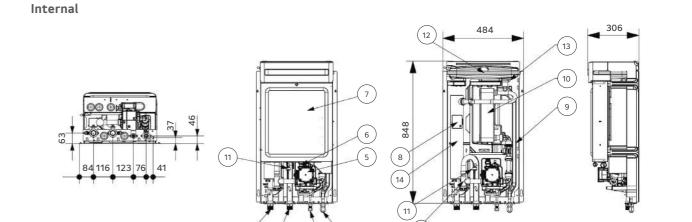

No.	Part name	Description
1	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Refrigerant pipe (liquid)	Ø 9.52 (mm)
4	Refrigerant pipe (gas)	Ø 15.88 (mm)
5	Water pump	To circulate water inside the system
6	Safety valve	Open at water pressure 3 bar
7	Control box	PCB and terminal blocks
8	Thermal switch	Cut-off power input to electric heater at 90°C
9	Flow sensor	To measure the water flow rate (5-80 LPM)
10	Plate heat exchanger	Heat exchange between refrigerant and water
11	Pressure sensor	To measure the water pressure (0-2 MPa)
12	Expansion tank	Absorbing volume change of heated water
13	Air vent	Air purging when charging water
14	Backup heater	6 kW
15	Strainer	Filtering and stacking particles inside circulating water

THERMAVI

R32 Split **Combi Unit**







The LG THERMA V R32 Split Combi Unit is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit. THERMA V R32 Split Combi Unit is the perfect spacesaving solution for residential applications because the Domestic Hot Water (DHW) tank, which are typically installed separately, are fully integrated along with hydronic components. The outdoor unit is on offer in 4/6 kW and 5/7/9 kW capacity range. R32 Split 4/6 kW model is suitable for new build houses that are well insulated and require a small heating load, while R32 Split 5/7/9 kW model is adapted for both new build and renovation projects.


Product Range

Phase	Capacity (kW)	Indo	or Unit	Outdoor Unit		
	4	LINIO CAST NIVO		HU041MR U20	t G	
	6	HN0613T NK0		HU061MR U20		
1 Ø	5		31	HU051MR U44	H. 100	
	7	HN0913T NK0	20	HU071MR U44	LG —	
	9	9		HU091MR U44	5	



Key Features

- Capacity range from 4 and 6 kW for new build and 5 to 9 kW for new build or small renovation
- R32 refrigerant with reduced Global Warming Potential (GWP)
- Maximum flow temperature up to 55°C (4/6 kW) and 65°C
- Operation range down to -20°C (4/6 kW) and -25°C (5/7/9 kW)
- All-in-one Combi Unit with integrated hot water cylinder

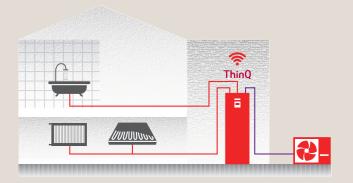

Excellent performance & efficiency













User convenience






































HIGHLIGHT OF R32 SPLIT COMBIUNIT



All-in-one Integration (Combi Unit)

THERMA V R32 Split Combi Unit is the perfect space-saving solution for residential application thanks to its fully integrated hot water tank. Unlike in the case of typical separate installation, in this all-in-one solution hydronic components and Domestic Hot Water (DHW) are pre-wired, which requires reduced installation time and saves valuable living space. THERMA V R32 Split Combi Unit is easy to set up and operate while it demonstrates outstanding reliability and efficiency.





LG THERMA V R32 Split Combi Unit (less installation space required)

Small Refrigerant Amount

- free from minimum floor area requirements due to R32 refrigerant




ONLY4/6kW

Minimum floor space requirements do not apply to R32 Split 4/6 kW, as the maximum refrigerant amount (including 30 m pipes) used in the product is smaller than the minimum set by regulation. As a result, there are more opportunities for flexible design and installation.








Reduced Noise Level

ONLY4/6kW

The R32 Split outdoor unit can be installed at the minimum of 4.5 m away¹⁾ from neighboring houses while complying with noise-related requirements in most European countries, including Germany. (based on 4 kW ODU & low noise mode)

Descri	ption	Germany	Austria	Switzerland	Netherlands
	Day time	50 dB (A) (06:00 ~ 22:00)	40 dB (A) (06:00 ~ 19:00)	40 dB (A) (07:00 ~ 19:00)	45 dB (A) (07:00 ~ 19:00)
Sound pressure threshold	Evening	-	35 dB (A) (19:00 ~ 22:00)	-	-
	Night time	35 dB (A) (22:00 ~ 06:00)	30 dB (A) (22:00 ~ 06:00)	35 dB (A) (19:00 ~ 07:00)	40 dB (A) (19:00 ~ 07:00)





- 1) Minimum distance to be away from a neighboring property may vary depending on installation conditions and noise regulations in individual countries.
- 2) Sound pressure level is converted from sound power level of low noise mode based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2.


HIGHLIGHT OF R32 SPLIT COMBIUNIT

Energy States Interlock

THERMA V R32 Split Combi Unit provides an energy state interlock function enabling customers to use their own renewable energy as much as possible. It can shift set points depending on input signal from the Energy Storage System (ESS) or any other third-party device using Modbus or Digital 230 V inputs.

- Energy is generated from solar panels and sent to your battery.
- 2) When the battery is charged, the surplus energy from the ESS will heat the water in your water tank and also the surplus energy can be used to heating your room.
- energy can be used to heating your room.

 3) Surplus energy remaining even after utilized will be automatically converted to be sell to the grid.

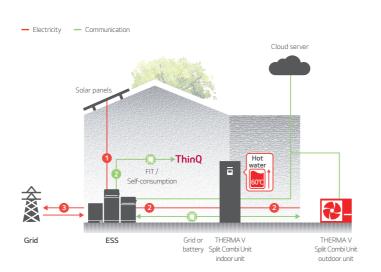

Easy Draining System

It is convenient for maintenance or moving as the water inside can be easily drained through the built-in drain valve.







DHW Recirculation Pump Control

THERMA V can be connected to the DHW recirculation pump, which can then be managed via the scheduling function. When a user opens the faucet, hot water is immediately accessible thanks to the DHW recirculating function. This feature also has the added advantage of preventing Legionella growth in the hot water pipe.





THERMA V_m (R32) R32 SPLIT COMBI UNIT (4 / 6 kW)

Outdoor unit

HU041MR U20 HU061MR U20

Indoor unit

HN0613T NK0






















Key Components

Combi Unit

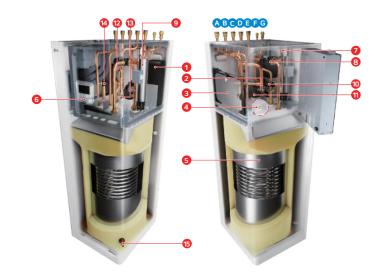

Components

- 1 Plate heat exchanger (ref. / water)
- 2 Strainer
- 3 Expansion tank for heating (8 l)
- 4 Reserved space for DHW expansion tank
- 5 DHW storage tank (stainless steel, 200 l) with internal coil type heat exchanger
- 6 Standard III remote controller 1)
- (air temp. sensor integrated) 7 Air vent valve
- 8 3 Way diverting valve (DC)
- 9 Electric back-up heater (3 kW)
- 10 Water flow sensor
- 11 Main water pump with air vent and safety valve (water circuit, 3 bar)
- 12 Water pressure sensor
- 13 Drain valve for water circuit
- 14 Safety valve (DHW tank, 10 bar)
- 15 Drain valve for DHW tank
- 1) Temperature control class (ERP class): V

Connections

- A DHW recirculation pipe (female G1" *)
- B Domestic hot water outlet pipe (female G1" *)
- C Domestic cold water inlet pipe (female G1" *)
- D Heating circuit inlet pipe (female G1" *)
- Heating circuit outlet pipe (female G1" *)
- F Refrigerant liquid pipe (SAE 1/4" with connector **)
- G Refrigerant gas pipe (SAE 1/2" with connector **)
- * According to ISO 228-1 (parallel pipe threads)
- ** In case of Split 4/6 kW model, the adaptors provided with the outdoor unit must be separately installed on the gas/liquid connection of the indoor unit when connecting the refrigerant pipe. After installing the adaptors, the liquid and gas connection size becomes Ø 6.35 (1/4 inch) and Ø 12.7 (1/2 inch) respectively.

Product Specification

Efficiency Data		Unit	4 kW (1 Ø)	6 kW (1 Ø)	
Seasonal space heating eff. cla	ass (35℃ / 55℃)	-	A+++/A++	A+++/A++	
Seasonal space heating efficie	ncy (η _s) (35℃ / 55℃)	%	183 / 126	183 / 126	
SCOP (35℃ / 55℃)		-	4.65 / 3.23	4.65 / 3.23	
Declared load profile, average	climate	-	L	L	
Water heating efficiency (η_{WH})	, average climate	%	133	133	
COP _{DHW} , average climate		-	3.15	3.15	
Water heating eff. class, avera	ge climate	-	A+	A+	
Annual energy consumption, D	HW (average climate)	kWh	770	770	
Heating up time acc. to EN 16	147 (average climate)	h/mn	1h45		
Max. usable water volume acc	to EN 16147 (average climate)	l	220		
Declared load profile, warmer	climate	-	L	L	
Water heating efficiency (η_{WH})	, warmer climate	%	160	160	
COP _{DHW} warmer climate		-	3.69	3.69	
Water heating eff. class, warm	er climate	-	A++	A++	
Declared load profile, colder cl	imate	-	L	L	
Water heating efficiency (η_{WH})	, colder climate	%	110	110	
COP _{DHW} colder climate		-	2.54	2.54	
Water heating eff. class, colde	r climate	-	A	А	
Sound power level (outdoor unit)	Rated / low noise mode	dB(A)	57 / 56	58 / 57	
Sound pressure level at 5m (outdoor unit)	Rated / low noise mode	dB(A)	35 / 34	36 / 35	
Sound power level (indoor unit)		dB(A)	42		
Sound pressure level at 1m (indoor unit)	Rated	dB(A)	34	4	

Nominal Capacity and COP/EER					
Air +7℃ / water +35℃	Heating capacity / COP	kW / -	4.00 / 5.10	6.00 / 4.95	
Air +2℃ / water +35℃	Heating capacity / COP	kW / -	3.60 / 3.75	4.80 / 3.65	
Air -7℃ / water +35℃	Heating capacity / COP	kW / -	4.00 / 3.08	6.00 / 2.98	
Air +7℃ / water +55℃	Heating capacity / COP	kW / -	3.70 / 2.85	4.60 / 2.90	
Air -7℃ / water +55℃	Heating capacity / COP	kW / -	3.70 / 1.80	4.60 / 1.80	
Air +35℃ / water +18℃	Cooling capacity / EER	kW / -	4.00 / 4.80	6.00 / 4.80	
Air +35℃ / water +7℃	Cooling capacity / EER	kW / -	4.00 / 3.40	6.00 / 3.20	

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 50 ~ 80°C Operating is available only when the booster heater is operating.

THERMA V... (R32) R32 SPLIT COMBI UNIT (4 / 6 kW)

Product Specification

Outdoor Units		Unit	HU041MR U20	HU061MR U20
Operation range	Heating & DHW (Min. ~ Max.)	℃	-20 ~ 35	
(outdoor air temperature)	Cooling (Min. ~ Max.)	°C	5 ~	48
	Туре	-	R3	32
Refrigerant	GWP	-	67	75
	Precharged amount	g	1,1	00
	Gas / Liquid	mm (inch)	Ø 12.7 (1/2) /	Ø 6.35 (1/4)
	Length standard / Min. / Max.	m	5 /	30
Piping connections (ref.)	Level difference Max.	m	3	0
	Max. length without additional charge	m	1	0
	Mass of additional ref. charge	g/m	2	0
Dimension	HxWxD	mm	650 x 87	70 x 330
Weight	Empty	kg	44	1.7
Exterior	Color / RAL code	-	Warm gray ,	/ RAL 7044
	Voltage, phase, frequency	V, Ø, Hz	220 - 24	40, 1, 50
Power supply	Standby power consumption	W	20	
	Recommended circuit breaker	А	16	20

Indoor Units			HN0613T NK0
	Heating (Min. ~ Max.)	℃	15 ~ 55
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	℃	5 ~ 27
	DHW (Min. ~ Max.)	°C	15 ~ 80
	Volume	l	200
Domestic hot water tank	Tank material	-	Duplex stainless steel
	Standby losses		60
Expansion vessel (heating circuit)	Volume	l	8
	Capacity combination	kW	3.0
Electric heater	Heating steps	Steps	1
Electric neater	Power supply	V, Ø, Hz	220 - 240, 1, 50
	Rated running current	А	13.0
	Inlet / outlet diameter for space heating	inch	
Piping connections (water)	Inlet / outlet diameter for DHW	inch	Female G1" according to ISO228-1 (parallel pipe threads)
	Recirculation	inch	
Piping connections (ref.)	Gas / Liquid	mm (inch)	Ø 12.7 (1/2) / Ø 6.35 (1/4)
Dimension	HxWxD	mm	1,750 x 600 x 660
Weight	Empty	kg	118.0
Exterior	Color / RAL code	-	White / RAL 9016

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standards. Sound pressure level is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.

 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
 7. DHW 50 ~ 80°C Operating is available only when the booster heater is operating.



127

THERMA V.. (R32) R32 SPLIT COMBI UNIT (4 / 6 kW)

Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HU041MR U20 + HN0613T NK0

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C
Temperature			ty (kW)			
-20℃ DB	4.00	4.00	4.00	4.00	-	-
-15℃ DB	4.00	4.00	4.00	4.00	4.00	-
-7℃ DB	4.00	4.00	4.00	4.00	4.00	4.00
-4℃ DB	4.00	4.00	4.00	4.00	4.00	4.00
-2℃ DB	4.00	4.00	4.00	4.00	4.00	4.00
2°C DB	4.00	4.00	4.00	4.00	4.00	4.00
7℃ DB	4.00	4.00	4.00	4.00	4.00	4.00
10℃ DB	4.00	4.00	4.00	4.00	4.00	4.00
15℃ DB	4.00	4.00	4.00	4.00	4.00	4.00
18℃ DB	4.00	4.00	4.00	4.00	4.00	4.00
20℃ DB	4.00	4.00	4.00	4.00	4.00	4.00
35℃ DB	4.00	4.00	4.00	4.00	4.00	4.00

HU061MR U20 + HN0613T NK0

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C		
Temperature	Capacity (kW)							
-20°C DB	4.92	4.78	4.64	4.50	-	-		
-15℃ DB	5.56	5.52	5.48	5.44	5.40	-		
-7℃ DB	6.00	6.00	6.00	6.00	6.00	6.00		
-4°C DB	6.00	6.00	6.00	6.00	6.00	6.00		
-2℃ DB	6.00	6.00	6.00	6.00	6.00	6.00		
2℃ DB	6.00	6.00	6.00	6.00	6.00	6.00		
7℃ DB	6.00	6.00	6.00	6.00	6.00	6.00		
10℃ DB	6.00	6.00	6.00	6.00	6.00	6.00		
15℃ DB	6.00	6.00	6.00	6.00	6.00	6.00		
18℃ DB	6.00	6.00	6.00	6.00	6.00	6.00		
20℃ DB	6.00	6.00	6.00	6.00	6.00	6.00		
35℃ DB	6.00	6.00	6.00	6.00	6.00	6.00		

Note

1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),

LPM: Liters Per Minute (ℓ/\min), TC: Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.

Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

In accordance with the test standard (or nations), the rating will vary slightly.

4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum cooling capacity

HU041MR U20 + HN0613T NK0

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
20℃ DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
30°C DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
35℃ DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
40°C DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00
45°C DB	4.00	4.00	4.00	4.00	4.00	4.00	4.00

HU061MR U20 + HN0613T NK0

	· Intoolol Itale						
Outdoor	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C	LWT 18 °C	LWT 20 °C	LWT 22 °C
Temperature				Capacity (kW)			
10℃ DB	6.00	6.00	6.00	6.00	6.00	6.00	6.00
20℃ DB	6.00	6.00	6.00	6.00	6.00	6.00	6.00
30℃ DB	6.00	6.00	6.00	6.00	6.00	6.00	6.00
35℃ DB	6.00	6.00	6.00	6.00	6.00	6.00	6.00
40°C DB	5.74	5.81	5.87	5.91	6.00	6.00	6.00
45℃ DB	5.48	5.61	5.73	5.81	5.94	6.00	6.00

Not

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),

LPM : Liters Per Minute (ℓ/\min), TC : Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

Direct interpolation is permissible. Do not 3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.

Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

• In accordance with the test standard (or nations), the rating will vary slightly.


4. The shaded areas are not guaranteed continuous operation.


THERMA V... (R32) R32 SPLIT COMBI UNIT (4 / 6 kW)

Drawings


HU041MR U20 / HU061MR U20

[Unit: mm]

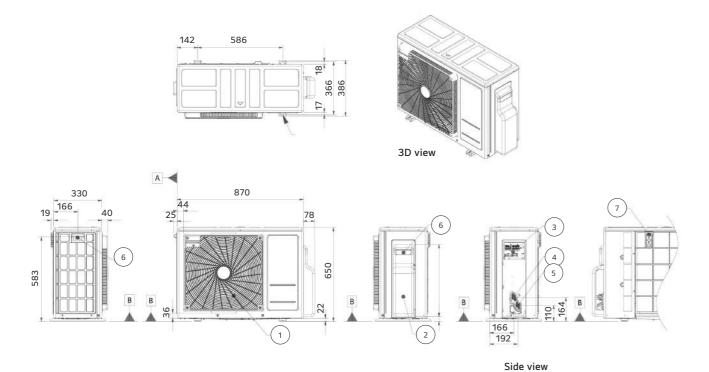




No.	Part name	Description
1	Air outlet	-
2	Control cover & SVC valve cover	-
3	Power and communication cable connection	-
4	Gas pipe connection	Flare joint
5	Liquid pipe connection	Flare joint
6	Handle	-
7	Intake air temperature sensor cover	-

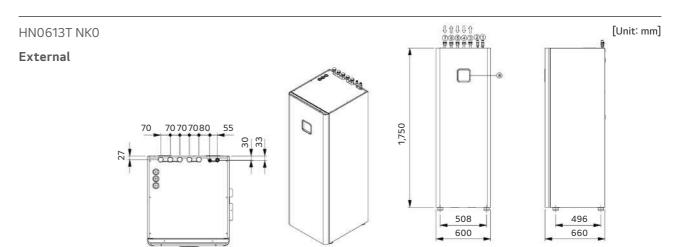


No.	Part name	Description
1	Refrigerant gas pipe	SAE 1/2"¹)
2	Refrigerant liquid pipe	SAE 1/4"¹)
3	Heating circuit outlet pipe	
4	Heating circuit inlet pipe	
5	Domestic cold water inlet pipe	Female G1" according to ISO228-1 (parallel pipe threads)
6	Domestic cold water outlet pipe	
7	DHW re-circulation pipe	
8	Control panel	Built-in remote controller

1) When connecting the refrigerant pipe, the adaptors provided with the outdoor unit must be installed on the connection of the indoor units.



No.	Part name	Description
1	DHW tank	Domestic hot water tank (200 ℓ)
2	Heater	Electric heater (3 kW)
3	Flow sensor	Flow metering sensor
4	3 way valve	For DHW / heating
5	Pressure sensor	Pressure sensor
6	Expansion vessel	8 l for Heating circuit
7	DHW tank sensor	Temperature sensor
8	Heat exchanger 1	Coil heat exchange (water / DHW)
9	Heat exchanger 2	Plate heat exchange (ref. / Water)



No.	Part name	Description
10	Water pump	Main circulation pump
11	Control box	PCB'A and terminal blocks
12	Air vent	For air purging
13	Drain cock 1	Valve for DHW tank drain
14	Drain cock 2	Valve for water circuit drain
15	Strainer	For water circuit
16	Safety valve	For DHW (10 bar)
17	Safety valve	For water circuit (3 bar)

THERMA V_m (R32) R32 SPLIT COMBI UNIT (5 / 7 / 9 kW)

Outdoor unit

HU051MR U44 HU071MR U44 HU091MR U44

Indoor unit

HN0913T NK0
























Key Components

Combi Unit

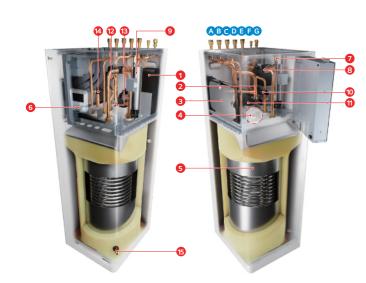

Components

- 1 Plate heat exchanger (ref. / water)
- 2 Strainer
- 3 Expansion tank for heating (8 ℓ)
- 4 Reserved space for DHW expansion tank
- 5 DHW storage tank (stainless steel, 200 l) with internal coil type heat exchanger
- 6 Standard III remote controller 1)
- (air temp. sensor integrated)
- 7 Air vent valve
- 8 3 Way diverting valve (DC)
- 9 Electric back-up heater (3 kW)
- 10 Water flow sensor
- 11 Main water pump with air vent and safety valve (water circuit, 3 bar)
- 12 Water pressure sensor
- 13 Drain valve for water circuit
- 14 Safety valve (DHW tank, 10 bar)
- 15 Drain valve for DHW tank
- 1) Temperature control class (ERP class): V

Connections

- A DHW recirculation pipe (female G1" *)
- B Domestic hot water outlet pipe (female G1" *)
- C Domestic cold water inlet pipe (female G1" *)
- ▶ Heating circuit inlet pipe (female G1" *)
- Heating circuit outlet pipe (female G1" *)
- F Refrigerant liquid pipe (SAE 3/8") G Refrigerant gas pipe (SAE 5/8")
- * According to ISO 228-1 (parallel pipe threads)

Product Specification

Efficiency Data		Unit	5 kW (1 Ø)	7 kW (1 Ø)	9 kW (1 Ø)			
Seasonal space heating eff. class (35℃ / 55℃)			A+++ / A++	A+++ / A++	A+++ / A++			
Seasonal space heating efficie	ncy (η _s) (35°C / 55°C)	%	183 / 126	183 / 126	183 / 126			
SCOP (35°C / 55°C)		-	4.65 / 3.23	4.65 / 3.23	4.65 / 3.23			
Declared load profile, average c	limate	-	L	L	XL			
Water heating efficiency (η_{WH}),	average climate	%	133	133	140			
COP _{DHW} , average climate		-	3.15	3.15	3.40			
Water heating eff. class, averag	e climate	-	A+	A+	A+			
Annual energy consumption, DI	HW (average climate)	kWh	770	770	1,196			
Heating up time acc. to EN 16147 (average climate)				1h44				
Max. usable water volume acc. to EN 16147 (average climate)			250					
Declared load profile, warmer cl	imate	-	L	L	XL			
Water heating efficiency (η_{WH}),	warmer climate	%	160	160	170			
COP _{DHW} , warmer climate		-	3.69	3.69	4.10			
Water heating eff. class, warme	r climate	-	A++	A++	A++			
Declared load profile, colder clir	nate	-	L	L	XL			
Water heating efficiency (η_{WH}),	colder climate	%	110	110	115			
COP _{DHW} , colder climate		-	2,54	2.54	2.65			
Water heating eff. class, colde	r climate	-	А	А	А			
Sound power level (outdoor unit) Rated / low noise mode		dB(A)	60 / 58					
Sound pressure level at 5m (outdoor unit)	Rated / low noise mode	dB(A)	38 / 36					
Sound power level (indoor unit)	Rated	dB(A)	42					
Sound pressure level at 1m (indoor unit)	Rated	dB(A)		34				

Nominal Capacity and COP/EER						
Air +7℃ / water +35℃	Heating capacity / COP	kW/-	5.50 / 4.90	7.00 / 4.90	9.00 / 4.65	
Air +2℃ / water +35℃	Heating capacity / COP	kW / -	3.30 / 3.52	4.20 / 3.51	5.40 / 3.50	
Air +7℃ / water +55℃	Heating capacity / COP	kW / -	5.50 / 2.70	5.50 / 2.70	5.50 / 2.70	
Air +35℃ / water +18℃	Cooling capacity / EER	kW / -	5.50 / 4.60	7.00 / 4.50	9.00 / 4.20	
Air +35℃ / water +7℃	Cooling capacity / EER	kW / -	5.50 / 2.80	7.00 / 2.70	9.00 / 2.60	

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 ~ 80°C Operating is available only when the booster heater is operating.

THERMA V. (32) R32 SPLIT COMBI UNIT (5 / 7 / 9 kW)


Product Specification

Outdoor Units		Unit	HU051MR U44	HU071MR U44	HU091MR U44			
Operation range	Heating & DHW (Min. ~ Max.)	℃		-25 ~ 35				
(outdoor air temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 48					
	Туре	-		R32				
Refrigerant	GWP	-	675					
	Precharged amount	g		1,500				
	Gas / Liquid	mm (inch)		Ø 15.88 (5/8) / Ø 9.52 (3/8)				
Piping connections (ref.)	Length standard / Min. / Max.	m		5 / 50				
	Level difference Max.	m		30				
	Max. length without additional charge	m		10				
	Mass of additional ref. charge	g/m		40				
Dimension	HxWxD	mm		834 x 950 x 330				
Weight	Empty	kg		60.0				
Exterior	Color / RAL code	-		Warm gray / RAL 7044				
	Voltage, phase, frequency	V, Ø, Hz		220 - 240, 1, 50				
Power supply	Standby power consumption	W		20				
	Recommended circuit breaker	А	20	25	30			

Indoor Units		Unit	HN0913T NK0
	Heating (Min. ~ Max.)	℃	15 ~ 65
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	℃	5 ~ 27
	DHW (Min. ~ Max.)	℃	15 ~ 80
	Volume	l	200
Domestic hot water tank	Tank material	-	Duplex stainless steel
	Standby losses		60
Expansion vessel (heating circuit)	Expansion vessel (heating circuit) Volume		8
	Capacity combination	kW	3.0
Electric heater	Heating steps	Steps	1
Electric neater	Power supply	V, Ø, Hz	220 - 240, 1, 50
	Rated running current	А	13.0
	Inlet / outlet diameter for space heating	inch	
Piping connections (water)	Inlet / outlet diameter for DHW	inch	Female G1" according to ISO228-1 (parallel pipe threads)
	Recirculation	inch	
Piping connections (ref.)	Gas / Liquid	mm (inch)	Ø 15.88 (5/8) / Ø 9.52 (3/8)
Dimension	HxWxD	mm	1,750 x 600 x 660
Weight	Empty	kg	118.0
Exterior	Color / RAL code	-	White / RAL 9016

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.

 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
 7. DHW 55 ~ 80°C Operating is available only when the booster heater is operating.

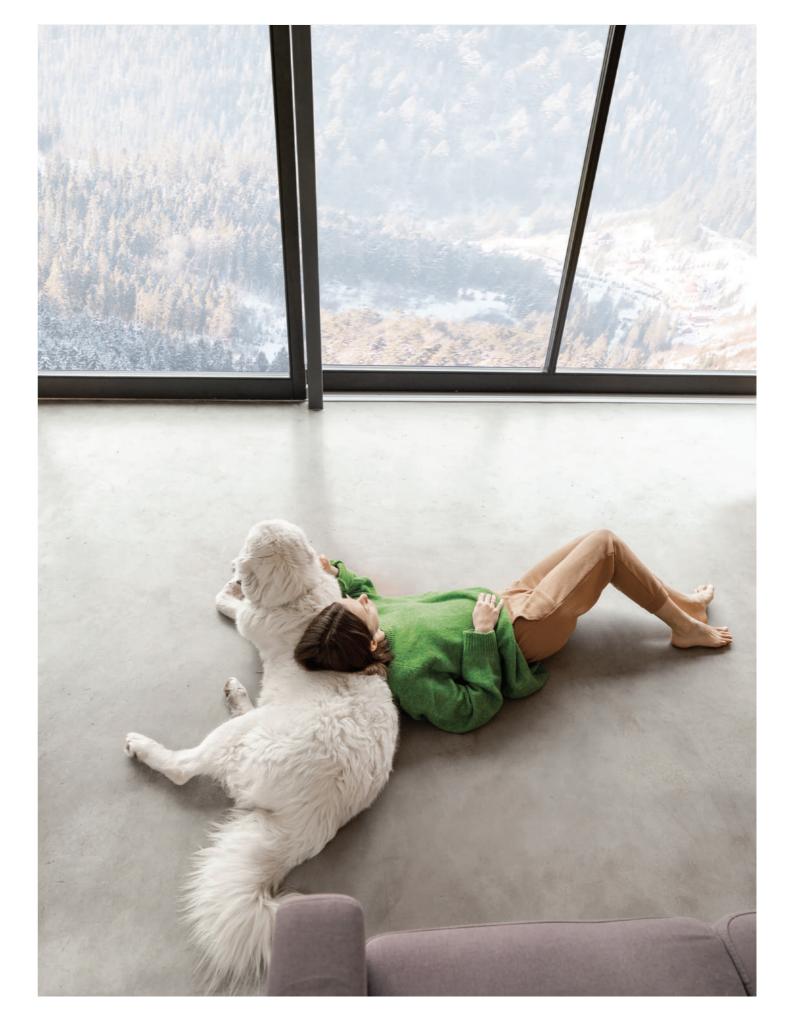

135

Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HU051MR U44 + HN0913T NK0

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature		Capacity (kW)						
-25℃ DB	4.02	3.90	3.78	3.66	-	-	-	-
-20℃ DB	4.64	4.51	4.38	4.26	4.13	-	-	-
-15℃ DB	5.26	5.12	4.99	4.85	4.72	4.58	-	-
-7℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-2℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HU071MR U44 + HN0913T NK0

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C		
Temperature	Capacity (kW)									
-25℃ DB	5.00	4.85	4.71	4.56	-	-	-	-		
-20℃ DB	5.58	5.43	5.27	5.11	4.95	-	-	-		
-15℃ DB	6.17	6.00	5.83	5.66	5.49	5.32	-	-		
-7℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	6.49	-		
-4℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-		
-2℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-		
2℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00		
7℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00		
10℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00		
15℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00		
18℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00		
20℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00		
35℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00		

HU091MR U44 + HN0913T NK0

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature				Capaci	ty (kW)			
-25℃ DB	6.40	6.20	6.00	5.80	-	-	-	-
-20℃ DB	7.23	7.00	6.77	6.54	6.31	-	-	-
-15℃ DB	8.06	7.80	7.54	7.28	7.02	7.10	-	-
-7℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	8.60	-
-4℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-2℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
2℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	7.95

Note

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),

LPM: Liters Per Minute (ℓ/\min), TC: Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.

• Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

• In accordance with the test standard (or nations), the rating will vary slightly.

4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum cooling capacity

HU051MR U44 + HN0913T NK0

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
30°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35℃ DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.32	5.34	5.35	5.37	5.38	5.40	5.41
45°C DB	5.13	5.17	5.21	5.23	5.27	5.29	5.32

HU071MR U44 + HN0913T NK0

Outdoor	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C	LWT 18 °C	LWT 20 °C	LWT 22 °C
Temperature				Capacity (kW)			
10℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
30℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35℃ DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40°C DB	6.50	6.63	6.81	7.00	7.00	7.00	7.00
45℃ DB	6.43	6.48	6.63	6.66	6.70	6.74	6.77

HU091MR U44 + HN0913T NK0

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
10℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
30℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35℃ DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	8.10	8.10	8.70	9.00	9.00	9.00	9.00
45°C DB	7.50	7.70	7.80	7.90	8.00	8.10	8.20

Not

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),

LPM : Liters Per Minute (ℓ/min), TC : Total Capacity (kW)

2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.

• Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

• In accordance with the test standard (or nations), the rating will vary slightly.

4. The shaded areas are not guaranteed continuous operation.


[Unit: mm]


THERMA V. (R32) R32 SPLIT COMBI UNIT (5 / 7 / 9 kW)


Drawings


HU051MR U44 / HU071MR U44 / HU091MR U44


[Unit: mm]






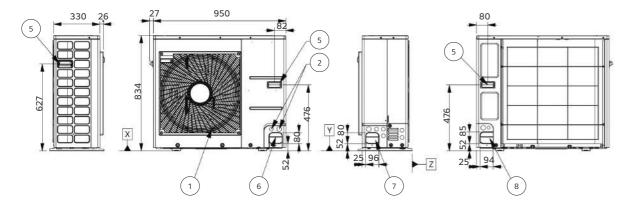








No.	Part name	Description
1	Air outlet	-
2	Power and communication cable hole	-
3	Gas pipe connection	Flare joint
4	Liquid pipe connection	Flare joint
5	Handle	-
6	Pipe routing hole (front)	-
7	Pipe routing hole (side)	-
8	Pipe routing hole (back)	-


HN0913T NK0


External

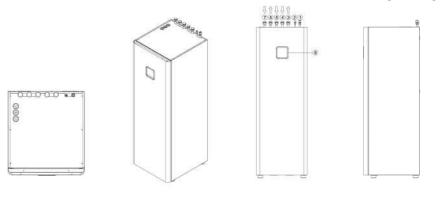


No.	Part name	Description
1	Refrigerant gas pipe	SAE 5/8"
2	Refrigerant liquid pipe	SAE 3/8"
3	Heating circuit outlet pipe	
4	Heating circuit inlet pipe	
5	Domestic cold water inlet pipe	Female G1" according to ISO228-1 (parallel pipe threads)
6	Domestic cold water outlet pipe	
7	DHW re-circulation pipe	
8	Control panel	Built-in remote controller

Internal







No.	Part name	Description
1	DHW tank	Domestic hot water tank (200 ℓ)
2	Heater	Electric heater (3 kW)
3	Flow sensor	Flow metering sensor
4	3 way valve	For DHW / heating
5	Pressure sensor	Pressure sensor
6	Expansion vessel	8 ℓ for heating circuit
7	DHW tank sensor	Temperature sensor
8	Heat exchanger 1	Coil heat exchange (water / DHW)
9	Heat exchanger 2	Plate heat exchange (ref. / water)

No.	Part name	Description
10	Water pump	Main circulation pump
11	Control box	PCB'A and terminal blocks
12	Air vent	For air purging
13	Drain cock 1	Valve for DHW tank drain
14	Drain cock 2	Valve for water circuit drain
15	Strainer	For water circuit
16	Safety valve	For DHW (10 bar)
17	Safety valve	For water circuit (3 bar)

THERMAVI

R410A Split **Hydro Unit**






What is R410A Split Hydro Unit

The LG THERMA V Split series is a heat pump that is easy, flexible to install. As the expression "split" suggests, the outdoor and indoor units are connected by refrigerant piping, thus freezing will not compromise this unit regardless of outdoor ambient temperatures. LG's THERMA V R410A Split Hydro Unit is designed for the benefit of users and installers who want to apply a heating solution to a large capacity building or applications subject to colder climate conditions. It has a maximized energy efficiency of A++ in the mid-temperature ranges, which results in reduced operating costs.


Product Range

Phase	Capacity (kW)	Indo	or Unit	Outdo	or Unit
	12			HU121MA U33	
1 Ø	14	HN1616M NK5		HU141MA U33	€ LG
	16			HU161MA U33	
	12		_	HU123MA U33	
3 Ø	14	HN1636M NK5		HU143MA U33	
	16			HU163MA U33	

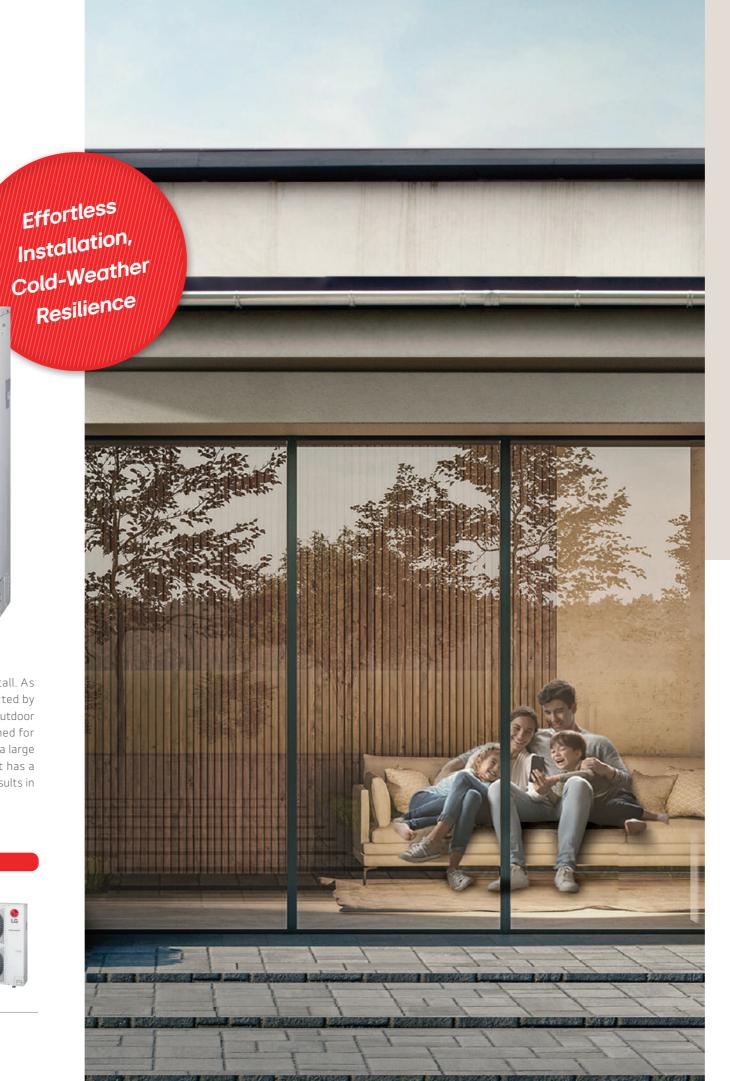

Key Features

- Capacity range from 12 to 16 kW for renovation
- Operation range down to -25℃
- Maximum flow temperature up to 57℃
- High level hydronic components integration for fast and clean installation



Excellent performance & efficiency















User convenience



























Easy installation & maintenance







THERMA V... (R410A) HIGHLIGHT OF R410A SPLIT HYDRO UNIT





Flexible Refrigerant Piping Design Installation flexibility is enabled by THERMA V Split's long pipe length (up to 50 m) and the fact that the refrigerant piping can be connected in three directions: front, side and rear. 3 way piping Piping capabilities \bullet Neat & easy installation enabled by the three-way piping. Pipe length max. 50 m Elevation max. 30 m



THERMA V... RATION RATION SPLIT HYDRO UNIT

Outdoor unit

HU121MA U33 / HU123MA U33 HU141MA U33 / HU143MA U33 HU161MA U33 / HU163MA U33

Indoor unit

HN1616M NK5 HN1636M NK5


























Key Components

Hydro Unit

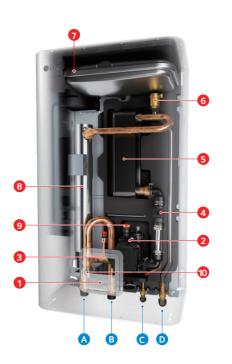

Components

- 1 Standard III remote controller 1) (air temp. sensor integrated)
- 2 Water pump
- 3 Water pressure sensor
- 4 Flow sensor
- 5 Plate type heat exchanger (ref/water)
- 6 Air vent valve
- 7 Expansion vessel (8 l)
- 8 Back up electric heater (3 kW)
- 9 Safety valve
- 10 Strainer

1) Temperature control class (ERP class) : V

Connections

- A Heating circuit outlet pipe (male PT 1" *)
- B Heating circuit inlet pipe (male PT 1" *)
- © Refrigerant liquid pipe (SAE 3/8")
- D Refrigerant gas pipe (SAE 5/8")
- * According to ISO 7-1 (tapered pipe threads)

Product Specification

Efficiency Data		Unit	12 kW (1 Ø) 12 kW (3 Ø)	14 kW (1 Ø) 14 kW (3 Ø)	16 kW (1 Ø) 16 kW (3 Ø)
Seasonal space heating eff. cla	ss (35℃ / 55℃)	-	A+++/A++	A+++/A++	A+++/A++
Seasonal space heating efficier	icy (ηS) (35℃ / 55℃)	%	183 / 131	182 / 132	179 / 130
SCOP (35°C / 55°C)		-	4.65 / 3.36	4.61 / 3.37	4.56 / 3.32
Sound power level (outdoor unit)	Rated / low noise mode	dB(A)	63 / 61	64 / 62	65 / 63
Sound pressure level at 5m (outdoor unit)	Rated / low noise mode	dB(A)	41 / 39	42 / 40	43 / 41
Sound power level (indoor unit)	Rated	dB(A)	'	44	
Sound pressure level at 1m (indoor unit)	Rated	dB(A)		36	

Nominal Capacity and COP/EER						
Air +7℃ / water +35℃	Heating capacity / COP	kW / -	12.00 / 4.55	14.00 / 4.41	16.00 / 4.26	
Air +2℃ / water +35℃	Heating capacity / COP	kW / -	11.00 / 3.62	12.00 / 3.61	13.80 / 3.60	
Air +7℃ / water +55℃	Heating capacity / COP	kW / -	11.00 / 2.55	11.50 / 2.55	12.00 / 2.55	
Air +35℃ / water +18℃	Cooling capacity / EER	kW / -	10.40 / 4.00	12.00 / 3.90	13.00 / 3.61	
Air +35°C / water +7°C	Cooling capacity / EER	kW / -	7.94 / 2.98	8.50 / 2.81	8.92 / 3.53	

Outdoor Units		Unit	HU121MA U33 HU123MA U33	HU141MA U33 HU143MA U33	HU161MA U33 HU163MA U33
Operation range	Heating & DHW (Min. ~ Max.)	°C	-25 ~ 35		
(outdoor air temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 48		
	Туре	-		R410A	
Refrigerant	GWP	-	2,088		
	Precharged amount	g	2,500		
	Gas / Liquid	mm (inch)	Ø 15.88 (5/8) / Ø 9.52 (3/8)		
	Length standard / Max.	m	7.5 / 50		
Piping connections (ref.)	Level difference Max.	m	30		
	Max. length without additional charge	m		7.5	
	Mass of additional ref. charge	g/m	40		
Dimension	H x W x D mm 1,380 x 950 x 330				
Weight Empty		kg	84.8 / 85.4		
Exterior	Color / RAL code	-		Warm gray / RAL 7044	
	Voltage, phase, frequency	V, Ø, Hz	z 220-240, 1, 50 / 380-415, 3, 50		
Power supply	Standby power consumption	W		60	
i ower suppry	Recommended circuit breaker	А		40 / 20	

Indoor Units		Unit	HN1616M NK5 HN1636M NK5
	Heating (Min. ~ Max.)	℃	15 ~ 57
Operation range (leaving water temperature)	Cooling (Min. ~ Max.)	°C	5 ~ 27
(leaving water temperature)	DHW (Min. ~ Max.)	°C	15 ~ 80
Expansion vessel (heating circuit)	Volume	l	8
	Capacity combination	kW	3.0 + 3.0 / 2.0 + 2.0 + 2.0
Dealous beates	Heating steps	Steps	2
Backup heater	Power supply	V, Ø, Hz	220-240, 1, 50 / 380-415, 3, 50
	Rated running current	А	25.0 / 8.7
Piping connections (water)	Inlet / outlet diameter	inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)
Piping connections (ref.)	Gas / Liquid	mm (inch)	Ø 15.88 (5/8) / Ø 9.52 (3/8)
Dimension	HxWxD	mm	850 x 490 x 315
Weight	Empty	kg	40.5 / 41.5
Exterior	Color / RAL code	-	Noble white / RAL 9016

- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.

 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 50 ~ 80 $^{\circ}$ C Operating is available only when the booster heater is operating.

Performance Table for Heating Operation

Maximum heating capacity (including defrost effect)

HU121MA U33 + HN1616M NK5 / HU123MA U33 + HN1636M NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	
Temperature			ity (kW)	y (kW)			
-20°C DB	11.25	10.95	10.22	9.85	-	-	
-15°C DB	12.00	11.32	10.90	10.32	-	-	
-7°C DB	12.00	11.66	11.45	11.16	11.13	-	
-4°C DB	12.00	12.00	12.00	12.00	12.00	11.24	
-2°C DB	12.00	12.00	12.00	12.00	12.00	11.98	
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	
7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	
15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	
18°C DB	12.00	12.00	12.00	12.00	12.00	12.00	
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	

HU141MA U33 + HN1616M NK5 / HU143MA U33 + HN1636M NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	
Temperature	Capacity (kW)						
-20°C DB	11.25	11.17	10.79	10.32	-	-	
-15°C DB	12.11	11.98	11.54	10.90	-	-	
-7°C DB	13.06	12.99	12.77	12.27	12.42	-	
-4°C DB	14.00	14.00	14.00	13.64	13.09	11.67	
-2°C DB	14.00	14.00	14.00	14.00	14.00	12.67	
2°C DB	14.00	14.00	14.00	14.00	14.00	13.98	
7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	
15°C DB	14.00	14.00	14.00	14.00	14.00	14.00	
18°C DB	14.00	14.00	14.00	14.00	14.00	14.00	
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	

HU161MA U33 + HN1616M NK5 / HU163MA U33 + HN1636M NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C
Temperature						
-20°C DB	12.27	12.01	11.48	10.86	-	-
-15°C DB	13.11	12.90	12.62	12.30	-	-
-7°C DB	13.73	13.70	13.46	13.16	12.42	-
-4°C DB	14.36	14.50	14.30	14.01	13.40	12.50
-2°C DB	15.20	14.80	14.50	14.25	14.00	13.50
2°C DB	16.00	16.00	16.00	16.00	16.00	14.51
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and can be found on specifications.
- · Above table values may not be matched according to installation conditions. Except for rated values, the performance is not guaranteed.
- The rating might slightly vary depending on test standards or countries.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum cooling capacity

HU121MA U33 + HN1616M NK5 / HU123MA U33 + HN1636M NK5

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
20℃ DB	7.60	8.55	9.51	10.33	11.19	11.98	-
30°C DB	8.62	9.05	9.78	10.67	10.90	11.37	-
35℃ DB	7.94	8.66	9.33	10.10	10.40	10.75	11.16
40℃ DB	7.56	8.02	8.81	9.36	9.54	9.89	10.28
45℃ DB	6.38	7.08	7.79	8.44	9.14	9.44	9.78

HU141MA U33 + HN1616M NK5 / HU143MA U33 + HN1636M NK5

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
20℃ DB	8.13	9.87	10.97	11.92	12,91	13.82	-
30℃ DB	9.24	10.44	11.29	12.31	12.58	13.12	-
35℃ DB	8.50	9.99	10.76	11.65	12.00	12.40	12.88
40°C DB	8.10	9.25	10.17	10.80	11.01	11.42	11.86
45°C DB	7.17	8.17	8.99	9.73	10.55	10.89	11.23

HU161MA U33 + HN1616M NK5 / HU163MA U33 + HN1636M NK5

Outdoor Temperature	LWT 7 °C	LWT 10 °C	LWT 13 °C	LWT 15 °C Capacity (kW)	LWT 18 °C	LWT 20 °C	LWT 22 °C
20°C DB	8.54	10.69	11.89	12.91	13.98	14.97	-
30℃ DB	9.70	11.31	12.22	13.34	13.63	14.21	-
35℃ DB	8.92	10.82	11.66	12.63	13.00	13.43	13.96
40℃ DB	8.51	10.03	11.02	11.70	11.93	12.37	12.85
45℃ DB	7.52	8.85	9.73	10.55	11.42	11.8	12.16


- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C)
 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and and can be found on specifications.
- Above table values may not be matched according to installation conditions. Except for rated values, the performance is not guaranteed.
- The rating might slightly vary depending on test standards or countries.

 4. The shaded areas are not guaranteed continuous operation.

THERMAY. RATION RATION SPLIT HYDRO UNIT

Drawings


HU121MA U33 / HU141MA U33 / HU161MA U33 / HU123MA U33 / HU143MA U33 / HU163MA U33 [Unit: mm]

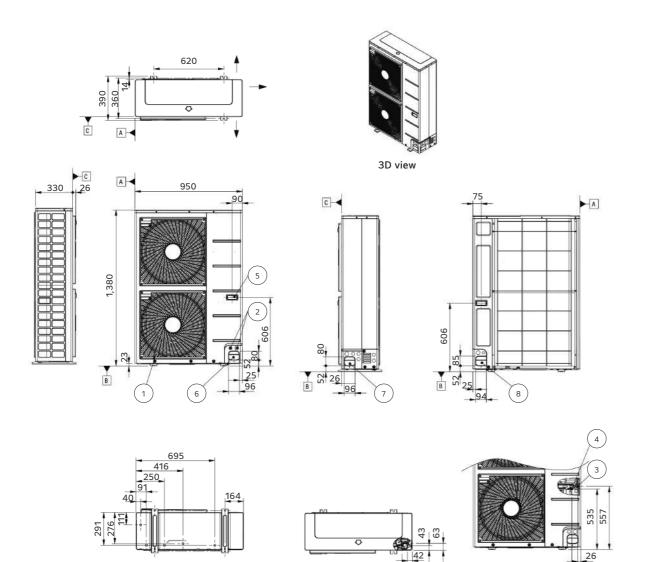

No.	Part name	Description
1	Air outlet	-
2	Power and communication cable hole	-
3	Gas pipe connection	Flare joint
4	Liquid pipe connection	Flare joint
5	Handle	-
6	Pipe routing hole (front)	-
7	Pipe routing hole (side)	-
8	Pipe routing hole (back)	-

External (Unit: mm)

No.	Part name	Description
1	Control panel	Built-in remote controller

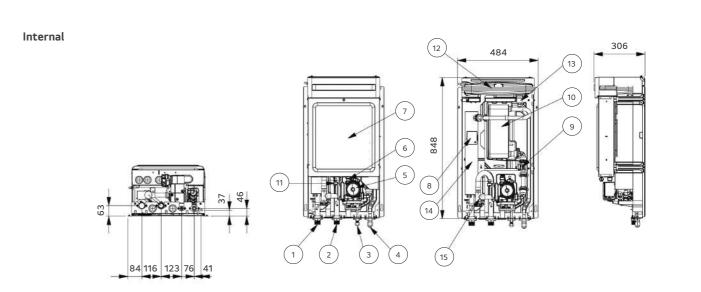

No.	Part name	Description
1	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Refrigerant pipe (liquid)	Ø 9.52 (mm)
4	Refrigerant pipe (Gas)	Ø 15.88 (mm)
5	Water pump	To circulate water inside the system
6	Safety valve	Open at water pressure 3 bar
7	Control box	PCB and terminal blocks
8	Thermal switch	Cut-off power input to electric heater at 90°C
9	Flow sensor	To measure the water flow rate (5-80 LPM)
10	Plate heat exchanger	Heat exchange between refrigerant and water
11	Pressure sensor	To measure the water pressure (0-2 MPa)
12	Expansion tank	Absorbing volume change of heated water
13	Air vent	Air purging when charging water
14	Backup heater	6 kW
15	Strainer	Filtering and stacking particles inside circulating water

THERMA VIII

Hot Water Heat Pump



Eco-Conscious **Hot Water** Solution


What is the Hot Water Heat Pump?

With an increasing emphasis on eco-conscious energy solutions, the Hot Water Heat Pump obtains 75% of its energy from outside air. This renewable energy source produces domestic hot water using two heat exchangers, a condenser and an evaporator.

Product Range

Phase Supply	Capacity (1)	Model	Appearance
4.7.222.4	200	WH20S	
1 Ø 230 V	270	WH27S	



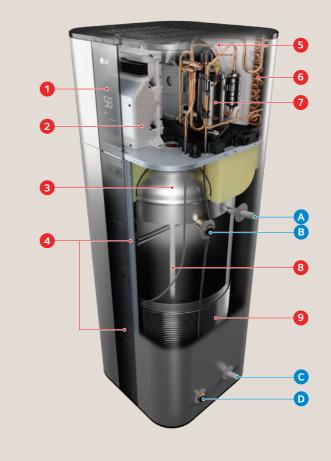

Components

1 Display screen

2 Inverter drive

3 Water tank

4 Electric heaters, 2 x 2 kW D Opening for drain valve

6 Evaporator

7 Dual inverter compressor

8 Anode (ICCP)

9 Ref. piping coil

Connections

A Water outlet (NPT 3/4")

B Opening for T&P relief valve

C Water inlet (NPT 3/4")

THERMA V.

HIGHLIGHT OF HOT WATER HEAT PUMP

Stylish Design

LG unit's exclusive square shape and luxury silver color make it an excellent fit for any interior design.



Top Class Energy Efficiency

LG's Hot water heat pump with the highly efficient DUAL Inverter Compressor allows for impressive energy savings of over 70 % compared to a conventional electric heater.

Energy saving

Benefiting from the market's first DUAL Inverter Compressor, LG Hot water heat pump can run at low rotational speed (up to 10 Hz), reducing energy consumption by 70 % more than an electric water heater (250 £, C class).






- ** Simulation data on daily electricity consumption, based on EU climate conditions (average, 15°C).
- * The data are based on LG internal simulation
- % The data are depending on the experimental conditions and is changeable according to the usage environment

Powerful Heating Performance

The DUAL Inverter Compressor maximizes the heat pump's power in turbo mode for a 30 % faster heating time for first-use water than in auto operation mode.

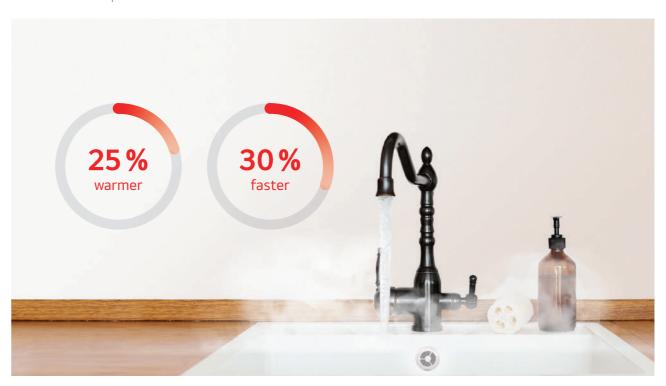

Fast & powerful water heating

Turbo mode can run at high speeds (up to 80 Hz) with simultaneous heating. The target water temperature in the tank will be achieved 30 % faster in turbo mode compared to Auto mode. The tank will be heated within one hour - starting with a cold tank.

Furthermore, if Turbo mode is used, the hot water can be heated to a higher temperature - leading to 25% more stored heat - compared to Auto mode.

Note: Obviously, this means increased usage of backup heater and more energy consumption, too. Thus, Turbo mode should be used only at peak load.

- $\ensuremath{\mathbb{X}}$ The data are based on LG internal tests and simulations.
- * The data depend on the experimental conditions and are changeable according to the usage environment.

Continuous operation

The two heat sources, two heaters and a heat pump complement each other perfectly. If the heat pump or one of the heaters fails, the other heat source allows alternative operation.








151


THERMA V.

HIGHLIGHT OF HOT WATER HEAT PUMP

Low Noise Operation

Through BLDC motor and DUAL Inverter Compressor, noise is reduced to 53 dB(A) (sound power) and provides a comfortable environment even in indoor installation scenes.

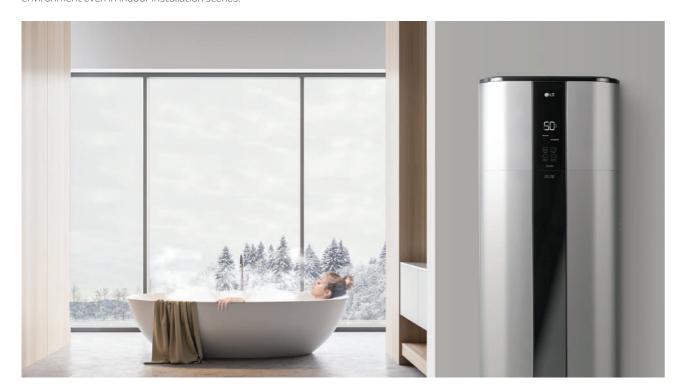

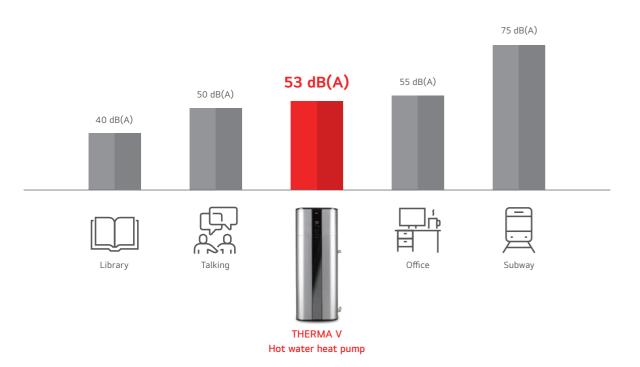

* Sound pressure is 38 dB(A) based on LG internal test.

- * The data are based on LG internal test (sound power).
- * The data are based on LG internal tests and simulations.
- * The data are depending on the experimental conditions and is changeable according to the usage environment.

Various Operation Mode


LG Hot Water Heat Pump can be operated in four different modes for different conditions.



Operation



Using basic control Display screen



Button	Display screen	Description		
	Heat pump	To select the heat pump mode		
Mode	Auto	To select the auto mode		
Widde	Turbo	To select the turbo mode		
	Vacation	To select the vacation mode		
-	Schedule	Set schedule mode only in LG ThinQ application		
-	Anti legionella	To select the anti legionella mode		
Set	-	To set the desired water temperature		
$\bigcirc \bigvee$		To adjust the desired water temperature		
Wi-Fi (3s)	<u></u>	To enable the Wi-Fi pairing		
Reset Filter (3s)		To reset the filter alarm		
°F/°C (3s)	°F °C	To change unit between °F and °C		
Water Temp (3s)	188	To display the current water temperature for 5 seconds		

THERMA V...

HIGHLIGHT OF HOT WATER HEAT PUMP

Harmony with Various Installation Places

LG's unique design provides standalone installation and harmony in various installation places.





Garage

Laundry room





Basement

Storage room






Bathroom

Bathroom

Smart Control

With the LG ThinQ smartphone app, users can easily control and monitor the heat pump, checking for current water temperatures, setting operating schedules and more.

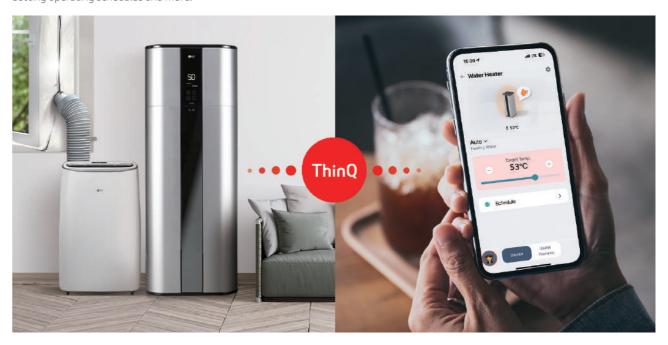

Embedded Wi-Fi

You can control the LG ThinQ app, checking information such as current water temperature, operating mode and more.



Smart diagnosis

Smart diagnosis allows users to conveniently check setup, installation, troubleshooting and other information directly from a smartphone.

Easy check & monitoring

Easily comprehensible error messages make detecting a solution and contacting the service center simple and convenient.





^{*} This image is intended to help you understand, and there may be some differences in actual use.

THERMA V.

HIGHLIGHT OF HOT WATER HEAT PUMP

powered by **DUAL Inverter** Compressor[™]

LG's DUAL Inverter Compressor™ - exceptional in the market - saves energy with a wide power-saving operating range and produces efficient heating, performing quietly even in max operation mode. This technology allows the inverter compressor to achieve superior energy efficiency, cooling performance and comfort compared to compressors with on-off capabilities which is rare for monobloc heat pump water heaters.



Varied-speed dual rotary

A compressor motor has a wider energy efficient rotational frequency and a higher volumetric quick cooling capacity compared to a conventional non-inverter compressor.

Product reliability improvement

As twin rotaries balance each other while they are rotating with high speed, it reduces noise dramatically compared to a shaking single rotary compressor. The reduction in vibration reduces the possibility of fractures occurring in the surrounding pipework.

- $\ensuremath{\mathbb{X}}$ The data are based on LG internal test and simulation.
- * The data depend on the experimental conditions and are changeable according to the usage environment

Benefit & verification

Reliable air conditioner

The product safety is guaranteed with a 10-year warranty offered to customers.



Verification

TUV Rheinland, long term accelerated-reliability test & high marginal test



Twin rotary type

% Long term accelerated-reliability test

LG's unique testing method with reinforced operating condition for a product life assurance to test and determine the product life cycle in a short period of time by accelerating the life cycle.


※ High marginal test

Test method to secure durability in various adverse conditions that may occur in the field by performing compressor reliability test against higher pressure and temperature than the designed range of pressure and temperature which the compressor operates in.

Werification obtained from TUV rheinland for 10-year product life cycle.

Quick & Easy Installation

The machine's one-direction inlet and outlet piping and easy-to-connect wires in the junction box allow for quick and easy installation. Furthermore, the LG ThinQ app provides service alarm and self diagnosis programs for convenient maintenance.

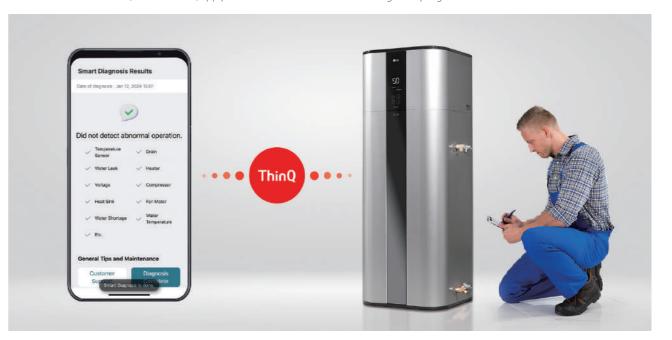

10-year warranty

The core parts of Hot water heat pump such as water tank and compressor are certified for 10-year durability by TUV rheinland. ceramic coating inside the water tank meets Germany ceramic standard DIN 4753 and guarantees 10 years of corrosion resistance.



* Other parts warranty may vary according to after sales service condition

THERMA V. **HOT WATER HEAT PUMP**





Technical Specification

Sales model		Unit -	WH20S R5TT20F-SA1	
Factory model		Oille		
Capacity	Volume (nominal)	l	200	
Energy efficiency 1)	COP (7°C / 15°C)	-	3.30 / 3.50	
Energy consumption	Annual energy consumption (7°C / 15°C)	kWh	756 / 709	
Load profile			Large	
	Upper element wattage (230 V)	kW	2	
Power input	Lower element wattage (230 V)	kW	2	
Energy efficiency class (7°C / 15	°C)	-	A+ / A+	
Power supply		V, Ø, Hz	230 / 1 / 50	
Available voltage range		V	195 ~ 265	
Operating mode		-	Turbo / Auto / Heat pump / Vacation / Anti legionella	
	н/м	m³/min	6.7 / 4.4	
Air flow rate	H / M	CFM	236.6 / 155.4	
Sound pressure level	Auto	dB(A)+3	38	
Sound power level		dB(A)	55	
Dimensions	Net (H x W x D)	mm	1,625 x 580 x 582	
Weight	Net	kg	100	
Nominal insulation thickness	Min. / Max.	mm	40 / 80	
Heat pump operation range	Min. / Max.	°C DB	-5 / 48	
Exterior color / RAL code	·	-	Luxury silver / RAL 9006	
	Туре	-	Inverter twin rotary	
	Warranty	Year	10	
Compressor	Manufacturer	-	LG Electronics	
	Motor output	W	510	
Max. working pressure (water ta	ank)	-	150 PSI (1,034 kPa)	
Circuit breaker		А	15	
Condensate water connection	I,D	mm	19, 12.7	
V40 (Mixed water at 40°C)		Q.	260	
,	Туре	-	R134a	
	Pre charge	kg	0.650	
Refrigerant	GWP	-	1,430	
	t-CO₂ eq	-	0.930	
Defrost method	1 1	-	Reverse cycle	
Anode		-	Impressed current cathodic protection	
T&P relief valve		-	Yes	
Water connection location		-	Side	
Water connection size		inch	G ¾ M	
Digital display		-	Yes	
Wi-Fi (LG ThinQ) ²⁾		-	Yes	
Tank warranty		Year	10	

- 1) Water heater energy efficiency (at auto mode) 2) ThinQ main function
- Operation mode (auto. heatpump, turbo, vacation, schedule), temperature setting
 Monitoring hot water temperature
 Maintenance point alarm (filter, anode rod, etc.)

- Maintenance point alarm (Inter, anode rod, etc.)

 * This product contains fluorinated greenhouse gases (R134a).

 * GWP: Global Warming Potential

 * t-CO₂eq: F-gas (kg)*GWP/1000

 * Specification, design and feature are subject to change without prior notice.

Technical Specification



			1411070	
Sales model Factory model		- Unit -	WH27S R5TT27F-SA0	
	Volume (nominal)	l	270	
Capacity		χ	3.45 / 3.85	
Energy efficiency 1)	COP (7°C / 15°C)	kWh	712 / 646	
Energy consumption Annual energy consumption (7°C / 15°C)		KVVII	Large	
Load profile	(222.10)		Large 2	
Power input	Upper element wattage (230 V)	kW	2	
	Lower element wattage (230 V)	kW	A+ / A++ ²)	
Energy efficiency class (7°C / 15°	-()		· · · · · · · · · · · · · · · · · · ·	
Power supply		V, Ø, Hz	230 / 1 / 50 195 ~ 265	
Available voltage range		V		
Operating mode		-	Turbo / Auto / Heat pump / Vacation / Anti legionella	
Air flow rate	H / M	m³/min	6.7 / 4.4	
	H/M	CFM	236.6 / 155.4	
ound pressure level	Auto	dB(A)+3	38	
Sound power level		dB(A)	55	
Dimensions	Net (H x W x D)	mm	2,008 x 580 x 582	
Veight	Net	kg	119	
Nominal insulation thickness Min. / Max.		mm	40 / 80	
leat pump operation range	Min. / Max.	°C DB	-5 / 48	
Exterior color / RAL code		-	Luxury silver / RAL 9006	
	Туре	-	Inverter twin rotary	
`amaraccar	Warranty	Year	10	
Compressor	Manufacturer	-	LG Electronics	
	Motor output	W	510	
Max. working pressure (water ta	nk)	-	150 PSI (1,034 kPa)	
Circuit breaker		А	15	
Condensate water connection	I.D	mm	19, 12.7	
/40 (Mixed water at 40°C)		l	360	
	Туре	-	R134a	
	Pre charge	kg	0.750	
Refrigerant	GWP	-	1,430	
	t-CO ₂ eq	-	1.072	
Defrost method		-	Reverse cycle	
Anode		-	Impressed current cathodic protection	
&P relief valve		-	Yes	
Vater connection location		-	Side	
Vater connection size		inch	G ¾ M	
Digital display		-	Yes	
Wi-Fi (LG ThinQ) ²⁾		-	Yes	
Tank warranty		Year	10	

- 1) Water heater energy efficiency (at auto mode)
 2) Energy label marked A+ and more than COP 3.75 in EU standard is A++
 3) ThinQ main function
- Operation mode (auto. heatpump, turbo, vacation, schedule), temperature setting
 Monitoring hot water temperature
 Maintenance point alarm (filter, anode rod, etc.)

- Maintenance point alarm (Inter, alloue rod, etc.)

 ** This product contains fluorinated greenhouse gases (R134a).

 ** GWP: Global Warming Potential


 ** t-CO₂eq: F-gas (kg)*GWP/1000


 ** Specification, design and feature are subject to change without prior notice.


THERMAV... HOT WATER HEAT PUMP


Drawings

WH20S [Unit: mm] WH27S [Unit: mm]



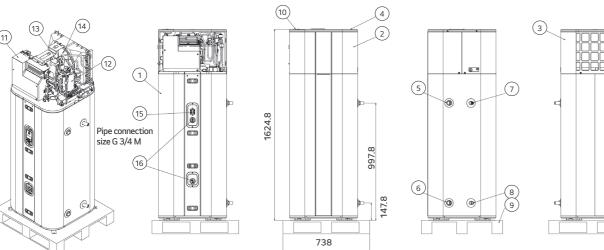



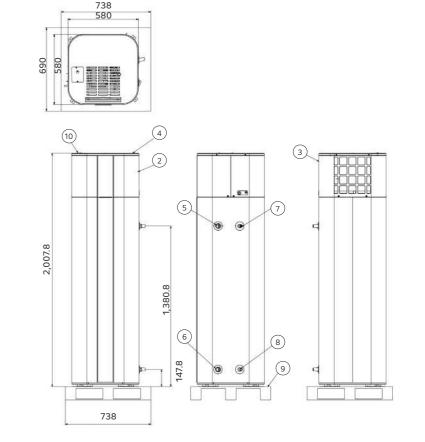

No.	Part name	Description
1	Water tank	200 l
2	Front panel	-
3	Rear panel	-
4	Top cover	-
5	T/P valve	210 °F / 99 °C 3/4 NPT
6	Drain valve	3/4 NPT
7	Outlet pipe	Water out, 3/4 NPT
8	Inlet pipe	Water in, 3/4 NPT

No.	Part name	Description
9	Wooden pallet	-
10	Junction cover	Power input
11	C/B case	-
12	Compressor	EST092MBA
13	Motor	43 W
14	Fan propeller	290 Ø
15	ECO	Emergency cut off (77°C)
16	Heater	2 EA, 2000 W+2000 W, 220 ~ 240 V

2	Water tank Front panel	270 l
	Front panel	_
2		
3	Rear panel	-
4	Top cover	-
5	T/P valve	210 °F / 99 °C 3/4 NPT
6	Drain valve	3/4 NPT
7	Outlet pipe	Water out, 3/4 NPT
8	Inlet pipe	Water in, 3/4 NPT

Pipe connection size G 3/4 M

No.	Part name	Description			
9	Wooden pallet	-			
10	Junction cover	Power input			
11	C/B case	-			
12	Compressor	EST092MBA			
13	Motor	43 W			
14	Fan propeller	290 Ø			
15	ECO	Emergency cut off (77°C)			
16	Heater	2 EA, 2000 W+2000 W, 220 ~ 240 V			

THEIRINA V_{TM} ACCESSORIES

ACCESSORIES PROVIDED BY LG
LG WI-FI MODEM
DOMESTIC HOT WATER TANK
169
COMBINED TEST WITH DHW TANK
170





THERMA V_{TM} ACCESSORIES

Accessories Provided by LG

Category	Model name	Model number	Figure	Applicable product	Relevant function	Purpose	Feature
	Room temperature sensor	PQRSTA0	9	All THERMA V products	Room temperature based control	To detect room air temperature for room temperature based control	• Max. wire length: 15 m
	Thermistor for 2 nd circuit or e/heater	PRSTAT5K10	0	All except for High Temperature	2 nd circuit (mixing circuit)	To detect 2 nd circuit temperature when using 2 nd circuit function	• 5 kΩ thermistor, 10 m
Sensors	Outdoor air temperature sensor	PHATSO ¹⁾		R290 Monobloc	Weather- dependent operation	To detect outdoor air temperature more accurately for weather-dependent operation especially when the outdoor unit is exposed to sunlight	Max, wire length: 12 m optional accessory - i.e. pre-installed air sensor (mounted at grille of outdoor unit) will be used for weather- dependent operation if the outdoor air temperature sensor is not installed
				All except for R32 Split Combi Unit and R32 Hydrosplit Combi Unit	Domestic hot water heating	To detect DHW tank temperature	Included in DHW tank kit Max, wire length: 12 m A harness that can
	Water tank sensor	PHRSTA0 ¹⁾	0	R290 Monobloc	Buffer tank temperature based control	To detect the temperature at the top of the buffer tank or at its outlet pipe if a big buffer tank is connected in parallel to the heat pump	be connected to PCB-connector TB_SENSOR/BUFFER is included in this accessory produced after 1st of March 2024.
	3 way valve	OSHA-3 V		All except Combi Units (incl. R290 Monobloc)	Domestic hot water heating	To divert water flow between space heating and DHW heating	Size: DN 20 G 1" connection, male threaded
Valves	T	OSHA-MV		Regardless of the model	Domestic hot water supply	To blend hot water with cold water for	Size: 3/4" DN20 male threaded
	Thermostatic mixing valve	OSHA-MV1				ensuring constant, safe shower and bath outlet temp.	Size: 1" DN25 male threaded
DHW	Domestic hot water tank (single coil)	OSHW-200 F OSHW-300 F OSHW-500 F		All except Combi Units	Domestic hot water	To generate and store domestic	Storage volume: 200 l, 300 l, 500 l Type: internal single coil Material stainless steel Capacity of booster heater: 2.4 kW
Domestic hot water ta	Domestic hot water tank (double coil)	OSHW-300 FD		All except Combi Units and High Temperature model	heating	hot water	Storage volume: 300 l Type: internal double coil Material: stainless steel Capacity of booster heater: 2.4 kW
		PHLTA	00	Hydro Unit for Split & Hydrosplit			Parts included: DHW tank sensor
	Domestic hot water	PHLTC		Old Hydro Unit for R410A Split - 3 Ø (HN1639 NK3 only)	Domestic hot water	To control an external DHW	(thermistor), circuit breaker, relay
Installation kits	not water tank kit	PHLTB	YAMANAN O	R32 Monobloc, R32 Monobloc S	heating	booster heater	 Parts included: DHW tank sensor (thermistor), circuit breaker, relay, multi harness
kits	Solar thermal kit	PHLLA	10	R32 Split 4/6 kW Hydro Unit (HN0613M NK5), R32 Monobloc, R410A Split Hydro Unit (HN1616 NK3 / HN1639 NK3)	Solar thermal heat utilization	To operate with solar thermal system	Length of thermistor: 12 m Size of tube connector (W x H x D): 110 x 55 x 22

1) These accessories are under developments, those will be	launched 2Q 2024.
--	-------------------

Category	Model name	Model number	Figure	Applicable product	Relevant function	Purpose	Feature
		HA031M E1	⊕ us	R290 Monobloc Control Unit, R32 Monobloc, R32 Monobloc S			Heater capacity: 3 kW Number of heating coil: 1ea (3.0 kW) Size (W x H x D): 210 x 607 x 217 Power: 220 ~ 240 V, 1 Ø
		HA061M E1			Capacity back up & emergency operation	To supplement insufficient capacity	Heater capacity: 6 kW Number of heating coil: 2 ea (3.0 + 3.0 kW) Size (W x H x D): 210 x 607 x 217 Power: 220 ~ 240 V, 1 Ø
Installation kits	Electric back-up heater	HA063M E1					Heater capacity: 6 kW Number of heating coil: 3 ea (2.0 + 2.0 + 2.0 kW) Size (W x H x D): 210 x 607 x 217 Power: 380 ~ 415 V, 3 Ø
		HA061C E1	2	R32 Hydrosplit Hydro Unit	Capacity back Up & emergency operation	To supplement insufficient capacity	Heater capacity: 6 kW Number of heating coil: 2 ea (3.0 + 3.0 kW) Power: 220-240 V,1 Ø
		HA063C E1	2	(HN1600MC NK1)			Heater capacity: 6 kW Number of heating coil: 3 ea (2.0 + 2.0 + 2.0 kW) Power: 380-415 V, 3 Ø
	Buffer tank for space heating	OSHB-40KT		R32 Hydrosplit Combi Unit	-	To provide the buffer volume of water to the heating circuit	• Volume: 40 l • Size (W x H x D): 518 x 560 x 175
Vessel	Expansion vessel for DHW	OSHE-12KT		R32 Hydrosplit Combi Unit	-	To absorb the pressure variations in the DHW tank due to changing temperatures	• Volume: 8 \(\ell \) • Connection: 3/4" • Max. pressure: 10 bar • Size (W x H x D): 416 x 238 x 502
	Extension wire for a wired remote controller	PZCWRC1	20g	All THERMA V products	-	To extend the wire between the wired remote controller and the indoor unit	• Length: 10 m
	Extension cable for Wi-Fi modem	PWYREW000		All THERMA V products	Wi-Fi control via LG ThinQ	To extend a wire between the WI-Fi modem and the indoor unit	• Length: 10 m
	2-remote control wire	PZCWRC2		All THERMA V products	2 remote control	To connect an additional remote controller (Slave)	• Length: 0.25 m
ETC		PHDPB	-	R32 Split Hydro Unit (NK4 suffix), R410A Split Hydro Unit (NK3 suffix)		To collect	
	Drain pan	PHDPC R32 I R32 I (NK5 R410	R290 Monoboc, R32 Hydrosplit , R32 Split Hydro Unit (NK5 suffix), R410A Split Hydro Unit (NK5 suffix)	Cooling operation	condensed water in the indoor unit during the cooling operation	-	
	Cover plate	PDC-HK10		R290 Monoboc, R32 Hydrosplit Hydro Unit, R32 Hydrosplit Combi Unit, R32 Split Hydro Unit , R32 Split Combi Unit, R410A Split Hydro Unit	-	To fill the blank space of the indoor unit front panel when the remote controller is relocated indoors.	-

16!

THERMA V. ACCESSORIES

Accessories Provided by LG

Category	Model name	Model number	Figure	Applicable product	Relevant function	Purpose	Feature
Remote controller	Wired remote controller	PREMTW101	5 (17) 6	All THERMA V products	2 remote control	To control the AWHP using two remote controllers (an additional remote controller)	New modern design 4.3 inch color LCD display Information displayed with simple graphic, icon & text Built-in temperature sensor Size (W x H x D): 120 x 120 x 16 Extension cable (PZCWRC1, 9.6 m) and 2 remote cable (PZCWRC2, 0.25 m) are included
	AC Ez Touch ¹⁾	PACEZA000	## 0 0 ## 0 0				• 5 inch color display • User-friendly control with iconographic interface (touch screen) • Max. 32 unit control • Total 200 schedule events (weekly/monthly/yearly/exception day) • Operation history • Remote controller lock (all, temp, mode) • PC access supported (IPv6 supported) • DI 1 ea (emergency stop only) • Size (W x H x D): 137 x 121 x 25
Central controller	AC Smart 5 ¹⁾	PACS5A000		All THERMA V products except for R290 Monoboc	Centralized control	To control the AWHP using LG central controller	• 10.2 inch color display • User-friendly control with iconographic interface (touch screen) • Max. IDU 64 • Total 100 schedule events (weekly/monthly/yearly/exception day) • History/operation trend • Interlock with 3"d party equipment (ACS IO, ACU IO module is needed) • Error alarm by e-mail • Remote controller lock (all, temp, mode) • Map view (visual navigation) • Web access supported with HTML5 (PC, smartphone, tablet) • DI 2 ea, DO 2 ea • BACnet IP/modbus TCP protocol support • Size (W x H x D): 253.2 x 167.7 x 28.9
	ACP 5 ¹⁾	PACP5A000					Web access controller Max. 128 unit control Total 100 schedule events (weekly/monthly/yearly/exception day) History/operation trend Interlock with 3 rd party equipment (ACS IO, ACU IO module is needed) Error alarm by e-mail Remote controller lock (all, temp, mode) Map view (visual navigation) DI 10 ea, DO 4 ea BACnet IP/modbus TCP protocol support Lonworks protocol support* (max. 64 unit control) Size (W x H x D): 270 x 155 x 65

* For using Lonworks protocol, only ACP 5 provides interface for BMS integration, and, need to U60FT module between ACP 5 and BMS system interface for BMS integration.	ace
between Lonworks FT-10 BMS and LG HVAC unit. U60FT should be purchased separately from 3rd party supplier. Please contact regional LG office	or more
detailed information.	

Category	Model name	Model number	Figure	Applicable product	Relevant function	Purpose	Feature
Gateway	Modbus RTU gateway	PMBUSB00A	STEELS	All THERMA V	Centralized control	To communicate and control through the central controller (providing modbus RTU connection between the AWHP and BMS)	Modbus RTU slave (RS485) / 9,600 bps Size (W x H x D): 53.6 x 89.7 x 60.7 Max. 16 IDUs with single module / Max. 64 IDUs with 4 modules Power: DC 12 V
	PI485 gateway for THERMA V ¹⁾	PP485A00T		products	Constant	To communicate and control through the central controller (converting LG protocol to RS485 protocol)	• 1 for each outdoor unit • Power: supplied by outdoor unit
	Simple dry contact	PDRYCB000				To connect	• 1 Set per 1 unit • 1 Input contact for turning on/off • Input power: 220 ~ 240 V • 2 output contacts - Operation status - Error status
Dry contact	Dry contact for thermostat	PDRYCB320		All THERMA V products	-	between the AWHP and external devices to control various functions	1 Set per 1 unit Non voltage or 12 ~ 24 V 8 digital input contacts for thermostat - On/off, operation mode, DHW heating - Emergency mode, silent mode 2 Output contacts - Operation status - Error status
	LG Wi-Fi modem	PWFMDD200	⊕ LG	All THERMA V products	Wi-Fi control via LG ThinQ	To control the AWHP via a smartphone	Basic control function On/off, operation mode, set temp DHW heating and set temp Weekly on/off schedule Error status check Frequency: 2.4 GHz IEEE 802.11b/g/n supported
ETC	Cloud gateway ¹⁾	PWFMDB200		R290 Monoboc, R32 Monobloc S, R32 Split Combi Unit, New Hydro Unit for Split & Hydrosplit	LG BECON cloud service	For remote control, monitoring and diagnosis	Max 16 indoor units RS485: 1 channel (LGAP) Wired/wireless IAN Power: 12 V DC Size (W x H x D): 120 x 120 x 29
	Meter interface	PENKTH000	STREET OF STREET	All THERMA V products	Energy monitoring	To measure production / consumption power	• Energy meter interface to monitor Electricity and Heat energy - Max. 3 watt - Hour meter - Max. 1 heat meter - Pulse width: 40 ms ~ 100 ms • Modbus RTU comm. with THERMA V - 2 wire RS485 / 9600 bps • Power: DC 12 V • Size (W x H x D): 54 x 90 x 61

¹⁾ PI485 Gateway (PP485A00T) should be installed on outdoor unit to use the central controller and cloud gateway. In the case of R290 Monobloc, PI485 G/W is built-in, so there is no need to purchase it separately.

THERMA V. ACCESSORIES

LG Wi-Fi Modem

PWFMDD200 ENCXLEU

Access LG THERMA V anytime and from anywhere with a Wi-Fi equipped device. LG's exclusive home appliances control app (LG ThinQ) offers simple operation and various functions.

- On / Off
- Operation mode selection
- Current temperature
- Set temperature
- On / Off reservation scheduling
- Energy monitoring
- ESS monitoring
- Silent mode reservation
- Holiday mode
- Quick DHW heating



Model name	PWFMDD200
Size (mm)	46 x 68 x 14
Interfaceable products	All THERMA V line-ups
Connection type	Indoor unit 1:1
Communication frequency	2.4 GHz
Wireless standards	IEEE 802.11b/g/n
Mobile application	LG ThinQ (Android v7.0 (Nougat) or higher, iPhone iOS 11.0 or higher)
Optional extension cable	PWYREW000 (10 m extension)

- 1. Functionality may be different according to each Indoor model.
- 2. User interface of application shall be revised for its design and contents improvement.
- 3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices.

- For the compatibility with indoor unit, please contact regional office.

Domestic Hot Water Tank

OSHW-200F AEU OSHW-300F AEU OSHW-500F AEU OSHW-300FD AEU



Single coil	Double coil

Technical specificat	ion	Unit	OSHW-200F	OSHW-300F	OSHW-500F	OSHW-300FD
General characteristics	Water volume	l	200	300	500	300
	Diameter	mm	640	640	810	640
	Height	mm	1,350	1,850	1,900	1,850
	Empty weight	kg	61	100	146	106
	Tank materials	-	STS: F18	STS: F18	STS: F18	STS: F18
	Color	-	Grey (RAL 7035)	Grey (RAL 7035)	Grey (RAL 7035)	Grey (RAL 7035)
Specification of electric back up	Additional electric heater	W	2,400	2,400	2,400	2,400
	Power supply	V, Ø, Hz	230, 1, 50 (60)	230, 1, 50 (60)	230, 1, 50 (60)	230, 1, 50 (60)
	Adjustable thermostat	°C	0 ~ 90	0 ~ 90	0 ~ 90	0 ~ 90
Specification of heat exchanger	Exchanger type	-	Internal single coil	Internal single coil	Internal single coil	Internal double coil
	Material exchanger	-	STS: F18	STS: F18	STS: F18	STS: F18
	Maximum water temp.	°C	90	90	90	90
	Coil surface	m ²	2.3	3.1	4.8	3.1 + 1
Water connections	Heat pump inlet	inch	1 BSP female	1 BSP female	1 ¼ BSP female	1 BSP female (upper coil)
	Heat pump outlet	inch	1 BSP female	1 BSP female	1 ¼ BSP female	1 BSP female (upper coil)
	Solar inlet	inch	-	-	-	¾ BSP Female (lower coil)
	Solar outlet	inch	-	-	-	¾ BSP Female (lower coil)
	City water inlet	inch	¾ BSP male	¾ BSP male	1 BSP male	¾ BSP male
	Hot water outlet	inch	¾ BSP female	1 BSP female	1 BSP female	1 BSP female
Energy efficiency class	(A+ to F scale)	-	В	В	В	В
Standing heat loss W		61	70	83	70	

Technical specification

Domestic hot water tank installation kit

PHLTA (R290 Monobloc, Hydro Unit for Split & Hydrosplit), PHLTB (Monobloc), PHLTC (old Hydro Unit for R410A Split 3 Ø - HN1639 NK3)

echnical specification		
Thermostatic mixing valve (3/4" DN20)	OSHA-MV	
Thermostatic mixing valve (1" DN25)	OSHA-MV1	
3 way valve	OSHA-3V	

THERMA V_{TM} ACCESSORIES

Combined Test With DHW Tank

LG has conducted a voluntary combination test of THERMA V with DHW tanks in accordance with EN16147 and obtained an ErP label for packages in accordance with the European nZEB regulations.

• R32 Monobloc S (5 ~ 16 kW) + OSHW-200 F

- HM051MR U44
- HM071MR U44
- HM091MR U44
- HM121MR U34
- HM141MR U34
- HM161MR U34
- HM123MR U34
- HM143MR U34
- HM163MR U34





	THERMA V line-up	R32 Monobloc S (5, 7, 9 kW)	R32 Monobloc S (12, 14, 16 kW)	
Model name		HM051MR U44 HM071MR U44 HM091MR U44	HM121MR U34 HM141MR U34 HM161MR U34 HM123MR U34 HM143MR U34 HM163MR U34	
	DHW tank	OSHW-200F AEU	OSHW-200F AEU	
Declared load	profile	L	L	
	Water heating eff. class	A+	A+	
Average	Water heating efficiency (ŋwн)	144 %	146 %	
climate COP _{DHW} Annual energy consumption	COP _{DHW}	3.1	3.2	
	Annual energy consumption	712 kWh	701 kWh	
Water heating eff. class	Water heating eff. class	A++	A++	
Varmer	Water heating efficiency (η _{WH})	174 %	166 %	
limate	СОР _{рни}	3.8	3.6	
	Annual energy consumption	588 kWh	616 kWh	
Water heating eff. class	Water heating eff. class	A	A	
Colder	Water heating efficiency (η _{WH})	87 %	101 %	
limate	СОР _{DHW}	1.9	2.2	
	Annual energy consumption	1,172 kWh	1,011 kWh	
Energy label		ENERG® 3 LG remain - (mon time) LG micross - (Observed Corrections) LG micross - (ENERG © S LG motions - (1990 20 m a) LG motions - (1990	

